

Notice for TAIYO YUDEN Products

Please read this notice before using the TAIYO YUDEN products.



REMINDERS

Product Information in this Catalog

Product information in this catalog is as of March 2023. All of the contents specified herein and production status of the products listed in this catalog are subject to change without notice due to technical improvement of our products, etc. Therefore, please check for the latest information carefully before practical application or use of our products.

Please note that TAIYO YUDEN shall not be in any way responsible for any damages and defects in products or equipment incorporating our products, which are caused under the conditions other than those specified in this catalog or individual product specification sheets.

Approval of Product Specifications

Please contact TAIYO YUDEN for further details of product specifications as the individual product specification sheets are available. When using our products, please be sure to approve our product specifications or make a written agreement on the product specification with TAIYO YUDEN in advance.

Pre-Evaluation in the Actual Equipment and Conditions

Please conduct validation and verification of our products in actual conditions of mounting and operating environment before using our products.

Limited Application

1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment for consumer (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets, or the equipment approved separately by TAIYO YUDEN.

TAIYO YUDEN has the product series intended for use in the following equipment. Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

Application	Product Series		Quality Grade *3
	Equipment *1	Category (Part Number Code *2)	
Automotive	Automotive Electronic Equipment (POWERTRAIN, SAFETY)	A	1
	Automotive Electronic Equipment (BODY & CHASSIS, INFOTAINMENT)	C	2
Industrial	Telecommunications Infrastructure and Industrial Equipment	B	2
Medical	Medical Devices classified as GHTF Class C (Japan Class III)	M	2
	Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)	L	3
Consumer	General Electronic Equipment	S	3
	Only for Mobile Devices *4	E	4

*Notes: 1. Based on the general specifications required for electronic components for such equipment, which are recognized by TAIYO YUDEN, the use of each product series for the equipment is recommended. Please be sure to contact TAIYO YUDEN before using our products for equipment other than those covered by the product series.

2. On each of our part number, the 2nd code from the left is a code indicating the "Category" as shown in the above table. For details, please check the explanatory materials regarding the part numbering system of each of our products.

3. Each product series is assigned a "Quality Grade" from 1 to 4 in order of higher quality. Please do not incorporate a product into any equipment with a higher Quality Grade than the Quality Grade of such product without the prior written consent of TAIYO YUDEN.

4. The applications covered by this product series are limited to mobile devices (smartphone, tablet PC, smartwatch, handheld game console, etc.) among general electronic equipment for consumer. The design, specifications and operating environment, etc. differ from those of the product series for "General Electronic Equipment" (Category: S), so please check the individual product specification sheets for details. The product series for "General Electronic Equipment" (Category: S) can also be used for mobile devices.

2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment *1
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices *2
- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

*Notes: 1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.

2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

Safety Design

When using our products for high safety and/or reliability-required equipment or circuits, please fully perform safety and/or reliability evaluation. In addition, please install (i) systems equipped with a protection circuit and a protection device and/or (ii) systems equipped with a redundant circuit or other system to prevent an unsafe status in the event of a single fault for a failsafe design to ensure safety.

Intellectual Property Rights

Information contained in this catalog is intended to convey examples of typical performances and/or applications of our products and is not intended to make any warranty with respect to the intellectual property rights or any other related rights of TAIYO YUDEN or any third parties nor grant any license under such rights.

Limited Warranty

Please note that the scope of warranty for our products is limited to the delivered our products themselves conforming to the product specifications specified in the individual product specification sheets, and TAIYO YUDEN shall not be in any way responsible for any damages resulting from a failure or defect in our products. Notwithstanding the foregoing, if there is a written agreement (e.g., supply and purchase agreement, quality assurance agreement) signed by TAIYO YUDEN and your company, TAIYO YUDEN will warrant our products in accordance with such agreement, provided, however, that our products shall be used for general-purpose and standard use in the equipment specified in this catalog or the individual product specification sheets.

TAIYO YUDEN's Official Sales Channel

The contents of this catalog are applicable to our products which are purchased from our sales offices or authorized distributors (hereinafter "TAIYO YUDEN's official sales channel"). Please note that the contents of this catalog are not applicable to our products purchased from any seller other than TAIYO YUDEN's official sales channel.

Caution for Export

Some of our products listed in this catalog may require specific procedures for export according to "U.S. Export Administration Regulations", "Foreign Exchange and Foreign Trade Control Law" of Japan, and other applicable regulations. Should you have any questions on this matter, please contact our sales staff.

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our product specification sheets. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our website (<http://www.ty-top.com/>).

Automotive Application Guide

We classify automotive electronic equipment into the following four application categories and set usable application categories for each of our products. Therefore, we have the corresponding product series (the 2nd code from the left side of the part number is “A” or “C”). When using our products for automotive electronic equipment, please be sure to check such application categories and use the corresponding product series accordingly. Should you have any questions on this matter, please contact us.

Product Series (The 2nd Code from the Left Side of the Part Number)	Category	Automotive Electronic Equipment (Typical Example)
A	POWERTRAIN	<ul style="list-style-type: none">• Engine ECU (Electronically Controlled Fuel Injector)• Cruise Control Unit• 4WS (4 Wheel Steering)• Transmission• Power Steering• HEV/PHV/EV Core Control (Battery, Inverter, DC-DC)• Automotive Locator (Car location information providing device), etc.
	SAFETY	<ul style="list-style-type: none">• ABS (Anti-Lock Brake System)• ESC (Electronic Stability Control)• Airbag• ADAS (Equipment that directly controls running, turning and stopping), etc.
C	BODY & CHASSIS	<ul style="list-style-type: none">• Wiper• Automatic Door• Power Window• Keyless Entry System• Electric Door Mirror• Automobile Digital Mirror• Interior Lighting• Automobile Air Conditioning System• TPMS (Tire Pressure Monitoring System)• Anti-Theft Device (Immobilizer)• ADAS (Sensor, Equipment that is not interlocked with safety equipment or powertrain), etc.
	INFOTAINMENT	<ul style="list-style-type: none">• Car Infotainment System• ITS/Telematics System• Instrument Cluster Panel• Dashcam (genuine products for automotive manufacturer), etc.

Wire-wound Ferrite Power Inductors LCRN series for Automotive Body & Chassis and Infotainment

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

AEC-Q200 Grade 3 (we conduct the evaluation at the test condition of Grade 3.)

*Operating environment Temp:-40~85°C

REFLOW

AEC-Q200

PART NUMBER

*Operating Temp. : -40~125°C(Including self-generated heat)

L	C	R	N	J	1	0	1	4	5	G	L	1	0	0	M	N	
①				②	③			④		⑤	⑥	⑦			⑧		⑨

①Series

Code (1)(2)(3)(4)	
LCRN	Wire-wound Ferrite Power Inductor for Automotive Body & Chassis and Infotainment

(1) Product Group

Code	
L	Inductors

(2) Category

Code	Recommended equipment	Quality Grade
C	Automotive Electronic Equipment (Body & Chassis, Infotainment)	2

(3) Type

Code	
R	Ferrite Wire-wound (Drum-sleeve, pedestal type)

(4) Features, Characteristics

Code	
N	Standard Power choke

②Feature

Code	Feature
J	Bottom electrode (Pedestal type)

③Dimensions (L × W)

Code	Dimensions (L × W) [mm]
101	10.1 × 10.1
125	12.5 × 12.5

④Dimensions (H)

Code	Dimensions (H) [mm]
45	4.5
55	5.5
65	6.5
75	7.5

⑤Operating temperature

Code	Operating temperature [°C]
G	-40~+125

⑥Packaging

Code	Packaging
L	Taping

⑦Nominal inductance


Code (example)	Nominal inductance [μH]
1R0	1.0
100	10
101	100

※R=Decimal point

⑧Inductance tolerance

Code	Inductance tolerance
M	±20%
N	±30%

⑨Internal code

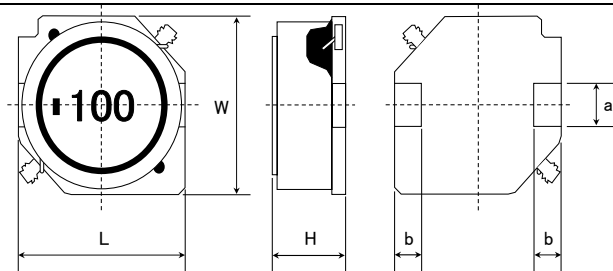
STANDARD EXTERNAL DIMENSIONS / MINIMUM QUANTITY


Type	L	W	H	a	b	Minimum quantity [pcs]
10145	10.1±0.3 (0.398±0.012)	10.1±0.3 (0.398±0.012)	4.5±0.35 (0.177±0.014)	2.8±0.1 (0.110±0.004)	2.0±0.15 (0.079±0.006)	2000
10155	10.1±0.3 (0.398±0.012)	10.1±0.3 (0.398±0.012)	5.5±0.35 (0.217±0.014)	2.8±0.1 (0.110±0.004)	2.0±0.15 (0.079±0.006)	2000
10165	10.1±0.3 (0.398±0.012)	10.1±0.3 (0.398±0.012)	6.5±0.35 (0.256±0.014)	2.8±0.1 (0.110±0.004)	2.0±0.15 (0.079±0.006)	2000
12555	12.5±0.3 (0.492±0.012)	12.5±0.3 (0.492±0.012)	5.5±0.35 (0.217±0.014)	3.0±0.1 (0.118±0.004)	2.0±0.15 (0.079±0.006)	2000
12565	12.5±0.3 (0.492±0.012)	12.5±0.3 (0.492±0.012)	6.5±0.35 (0.256±0.014)	3.0±0.1 (0.118±0.004)	2.0±0.15 (0.079±0.006)	2000
12575	12.5±0.3 (0.492±0.012)	12.5±0.3 (0.492±0.012)	7.5±0.35 (0.295±0.014)	3.0±0.1 (0.118±0.004)	2.0±0.15 (0.079±0.006)	2000

Unit: mm (inch)

Recommended Land Patterns
Surface Mounting

- Mounting and soldering conditions should be checked beforehand.
- Applicable soldering process to these products is reflow soldering only.

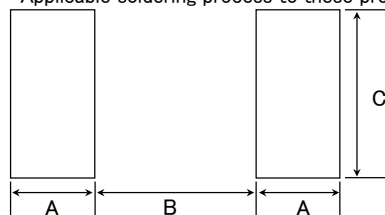

Type	A	B	C
10145	2.5	5.6	3.2
10155	2.5	5.6	3.2
10165	2.5	5.6	3.2
12555	2.5	8.6	3.2
12565	2.5	8.6	3.2
12575	2.5	8.6	3.2

Unit: mm

PART NUMBER

- All the Wire-wound Ferrite Power Inductors of the catalog lineup are RoHS compliant.

Notes)

- The exchange of individual specifications is necessary depending on your application and/or circuit condition. Please contact TAIYO YUDEN's official sales channel.
- For Automotive (AEC-Q200 Qualified) products for BODY & CHASSIS, and INFOTAINMENT. Please check "Automotive Application Guide" for further details before using the products.
< **AEC-Q200** :AEC-Q200 qualified>
All the Wire-wound Ferrite Power Inductors for Automotive products are tested based on the test conditions and methods defined in AEC-Q200 by family item.
Please consult with TAIYO YUDEN's official sales channel for the details of the product specifications and AEC-Q200 test results, etc.,
and please review and approve the product specifications before ordering.

10145 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency[kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ10145GL1R0NN	NS 10145T 1R0NNVV	1.0	$\pm 30\%$	0.0049	12.54	8.90	100
LCRNJ10145GL1R5NN	NS 10145T 1R5NNVV	1.5	$\pm 30\%$	0.0060	10.34	7.99	100
LCRNJ10145GL2R2NN	NS 10145T 2R2NNVV	2.2	$\pm 30\%$	0.0085	8.91	6.64	100
LCRNJ10145GL3R3NN	NS 10145T 3R3NNVV	3.3	$\pm 30\%$	0.0100	7.33	6.10	100
LCRNJ10145GL4R7NN	NS 10145T 4R7NNVV	4.7	$\pm 30\%$	0.0144	6.69	5.03	100
LCRNJ10145GL5R6NN	NS 10145T 5R6NNVV	5.6	$\pm 30\%$	0.0181	5.85	4.45	100
LCRNJ10145GL6R8NN	NS 10145T 6R8NNVV	6.8	$\pm 30\%$	0.0230	5.05	4.22	100
LCRNJ10145GL100MN	NS 10145T 100MNVV	10	$\pm 20\%$	0.0270	4.22	3.10	100
LCRNJ10145GL150MN	NS 10145T 150MNVV	15	$\pm 20\%$	0.0381	3.44	3.00	100
LCRNJ10145GL220MN	NS 10145T 220MNVV	22	$\pm 20\%$	0.0570	2.87	2.30	100
LCRNJ10145GL330MN	NS 10145T 330MNVV	33	$\pm 20\%$	0.0880	2.36	1.90	100
LCRNJ10145GL470MN	NS 10145T 470MNVV	47	$\pm 20\%$	0.130	2.00	1.50	100
LCRNJ10145GL680MN	NS 10145T 680MNVV	68	$\pm 20\%$	0.150	1.66	1.45	100
LCRNJ10145GL101MN	NS 10145T 101MNVV	100	$\pm 20\%$	0.230	1.40	1.10	100
LCRNJ10145GL151MN	NS 10145T 151MNVV	150	$\pm 20\%$	0.350	1.11	0.86	100
LCRNJ10145GL221MN	NS 10145T 221MNVV	220	$\pm 20\%$	0.510	0.91	0.78	100
LCRNJ10145GL331MN	NS 10145T 331MNVV	330	$\pm 20\%$	0.700	0.71	0.64	100
LCRNJ10145GL471MN	NS 10145T 471MNVV	470	$\pm 20\%$	1.03	0.61	0.52	100
LCRNJ10145GL681MN	NS 10145T 681MNVV	680	$\pm 20\%$	1.57	0.50	0.42	100
LCRNJ10145GL102MN	NS 10145T 102MNVV	1000	$\pm 20\%$	2.58	0.41	0.32	100
LCRNJ10145GL152MN	NS 10145T 152MNVV	1500	$\pm 20\%$	3.70	0.36	0.27	100

10155 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency[kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ10155GL1R5NN	NS 10155T 1R5NNVV	1.5	$\pm 30\%$	0.0060	11.90	8.39	100
LCRNJ10155GL2R2NN	NS 10155T 2R2NNVV	2.2	$\pm 30\%$	0.0072	10.00	7.61	100
LCRNJ10155GL3R3NN	NS 10155T 3R3NNVV	3.3	$\pm 30\%$	0.0097	8.50	6.49	100
LCRNJ10155GL4R7NN	NS 10155T 4R7NNVV	4.7	$\pm 30\%$	0.0112	7.40	6.01	100
LCRNJ10155GL6R8NN	NS 10155T 6R8NNVV	6.8	$\pm 30\%$	0.0159	6.00	4.98	100
LCRNJ10155GL100MN	NS 10155T 100MNVV	10	$\pm 20\%$	0.0200	4.49	4.40	100
LCRNJ10155GL150MN	NS 10155T 150MNVV	15	$\pm 20\%$	0.0310	4.03	3.40	100
LCRNJ10155GL220MN	NS 10155T 220MNVV	22	$\pm 20\%$	0.0430	3.37	2.80	100

10165 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency[kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ10165GL1R5NN	NS 10165T 1R5NNVV	1.5	$\pm 30\%$	0.0062	13.60	8.04	100
LCRNJ10165GL2R2NN	NS 10165T 2R2NNVV	2.2	$\pm 30\%$	0.0074	10.80	7.32	100
LCRNJ10165GL3R3NN	NS 10165T 3R3NNVV	3.3	$\pm 30\%$	0.0086	9.30	6.76	100
LCRNJ10165GL4R7NN	NS 10165T 4R7NNVV	4.7	$\pm 30\%$	0.0112	7.70	5.88	100
LCRNJ10165GL6R8NN	NS 10165T 6R8NNVV	6.8	$\pm 30\%$	0.0140	6.00	5.22	100
LCRNJ10165GL100MN	NS 10165T 100MNVV	10	$\pm 20\%$	0.0174	5.20	4.66	100
LCRNJ10165GL150MN	NS 10165T 150MNVV	15	$\pm 20\%$	0.0280	3.60	3.84	100
LCRNJ10165GL220MN	NS 10165T 220MNVV	22	$\pm 20\%$	0.0350	3.10	3.41	100

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

PART NUMBER

● 12555 type ● NS 12555 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency [kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ12555GL6R0NN	NS 12555T 6R0NN V	6.0	$\pm 30\%$	0.0140	5.01	5.60	100
LCRNJ12555GL100MN	NS 12555T 100MN V	10	$\pm 20\%$	0.0175	4.73	5.04	100
LCRNJ12555GL150MN	NS 12555T 150MN V	15	$\pm 20\%$	0.0233	3.89	4.18	100
LCRNJ12555GL220MN	NS 12555T 220MN V	22	$\pm 20\%$	0.0297	3.20	3.81	100
LCRNJ12555GL330MN	NS 12555T 330MN V	33	$\pm 20\%$	0.0415	2.64	3.16	100
LCRNJ12555GL470MN	NS 12555T 470MN V	47	$\pm 20\%$	0.0618	2.23	2.70	100
LCRNJ12555GL680MN	NS 12555T 680MN V	68	$\pm 20\%$	0.0832	1.81	2.14	100
LCRNJ12555GL101MN	NS 12555T 101MN V	100	$\pm 20\%$	0.117	1.53	1.86	100
LCRNJ12555GL151MN	NS 12555T 151MN V	150	$\pm 20\%$	0.215	1.10	1.30	100
LCRNJ12555GL221MN	NS 12555T 221MN V	220	$\pm 20\%$	0.270	1.00	1.18	100
LCRNJ12555GL331MN	NS 12555T 331MN V	330	$\pm 20\%$	0.410	0.82	0.96	100
LCRNJ12555GL471MN	NS 12555T 471MN V	470	$\pm 20\%$	0.520	0.68	0.80	100
LCRNJ12555GL681MN	NS 12555T 681MN V	680	$\pm 20\%$	0.870	0.48	0.61	100
LCRNJ12555GL102MN	NS 12555T 102MN V	1000	$\pm 20\%$	1.44	0.41	0.46	100
LCRNJ12555GL152MN	NS 12555T 152MN V	1500	$\pm 20\%$	1.73	0.40	0.44	100

● 12565 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency [kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ12565GL2R0NN	NS 12565T 2R0NN V	2.0	$\pm 30\%$	0.0080	13.91	7.60	100
LCRNJ12565GL4R2NN	NS 12565T 4R2NN V	4.2	$\pm 30\%$	0.0126	9.40	5.91	100
LCRNJ12565GL7R0NN	NS 12565T 7R0NN V	7.0	$\pm 30\%$	0.0162	7.80	5.21	100
LCRNJ12565GL100MN	NS 12565T 100MN V	10	$\pm 20\%$	0.0199	6.00	4.75	100
LCRNJ12565GL150MN	NS 12565T 150MN V	15	$\pm 20\%$	0.0237	5.60	4.33	100
LCRNJ12565GL220MN	NS 12565T 220MN V	22	$\pm 20\%$	0.0310	4.20	3.91	100
LCRNJ12565GL330MN	NS 12565T 330MN V	33	$\pm 20\%$	0.0390	3.80	3.22	100
LCRNJ12565GL470MN	NS 12565T 470MN V	47	$\pm 20\%$	0.0575	3.34	2.78	100
LCRNJ12565GL680MN	NS 12565T 680MN V	68	$\pm 20\%$	0.0775	2.70	2.30	100
LCRNJ12565GL101MN	NS 12565T 101MN V	100	$\pm 20\%$	0.123	2.23	1.81	100
LCRNJ12565GL151MN	NS 12565T 151MN V	150	$\pm 20\%$	0.173	1.80	1.54	100
LCRNJ12565GL221MN	NS 12565T 221MN V	220	$\pm 20\%$	0.273	1.39	1.18	100

● 12575 type

New part number	Old part number (for reference)	Nominal inductance [μ H]	Inductance tolerance	DC Resistance [Ω] ($\pm 20\%$)	Rated current ※) [A]		Measuring frequency [kHz]
					Saturation current Idc1	Temperature rise current Idc2	
LCRNJ12575GL1R2NN	NS 12575T 1R2NN V	1.2	$\pm 30\%$	0.0058	18.08	9.15	100
LCRNJ12575GL2R7NN	NS 12575T 2R7NN V	2.7	$\pm 30\%$	0.0085	13.91	7.69	100
LCRNJ12575GL3R9NN	NS 12575T 3R9NN V	3.9	$\pm 30\%$	0.0099	12.10	7.38	100
LCRNJ12575GL5R6NN	NS 12575T 5R6NN V	5.6	$\pm 30\%$	0.0116	10.20	6.36	100
LCRNJ12575GL6R8NN	NS 12575T 6R8NN V	6.8	$\pm 30\%$	0.0131	9.50	5.84	100
LCRNJ12575GL100MN	NS 12575T 100MN V	10	$\pm 20\%$	0.0156	7.65	5.55	100
LCRNJ12575GL150MN	NS 12575T 150MN V	15	$\pm 20\%$	0.0184	6.30	5.22	100
LCRNJ12575GL220MN	NS 12575T 220MN V	22	$\pm 20\%$	0.0260	5.50	4.05	100
LCRNJ12575GL330MN	NS 12575T 330MN V	33	$\pm 20\%$	0.0390	4.30	3.48	100
LCRNJ12575GL470MN	NS 12575T 470MN V	47	$\pm 20\%$	0.0515	3.60	2.95	100
LCRNJ12575GL680MN	NS 12575T 680MN V	68	$\pm 20\%$	0.0900	2.78	2.10	100
LCRNJ12575GL101MN	NS 12575T 101MN V	100	$\pm 20\%$	0.110	2.50	2.01	100
LCRNJ12575GL151MN	NS 12575T 151MN V	150	$\pm 20\%$	0.161	1.90	1.51	100
LCRNJ12575GL221MN	NS 12575T 221MN V	220	$\pm 20\%$	0.300	1.60	1.10	100
LCRNJ12575GL102MN	NS 12575T 102MN V	1000	$\pm 20\%$	1.170	0.72	0.53	100

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2) is the DC current value having temperature increase up to 40°C. (at 20°C)


※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

■ 定格電流のデレーティ: ■ Derating of Rated Current

● LCRN series

Derating of current is necessary for LCRN series depending on ambient temperature.

Please refer to the chart shown below for appropriate derating of current.

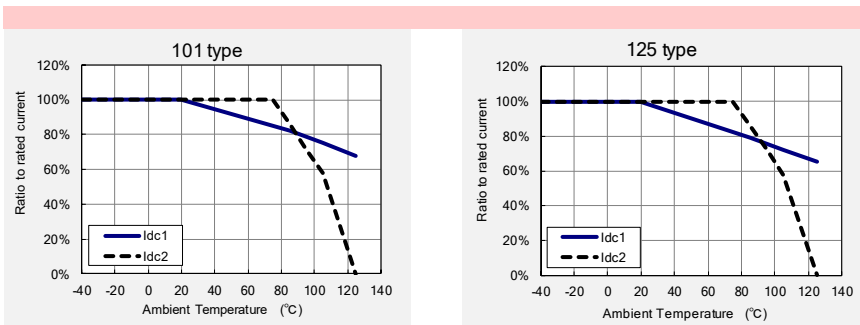

Wire-wound Ferrite Power Inductors LSRN/LCRN/LBRN/LLRN/LMRN series


PACKAGING

① Packing Quantity

Type	Standard Quantity (1reel) [pcs]	Minimum Quantity [pcs]
	Embossed Tape	Embossed Tape
10145	500	2000
10155	500	2000
10165	500	2000
12555	500	2000
12565	500	2000
12575	500	2000


② Tape Material

● Embossed Tape

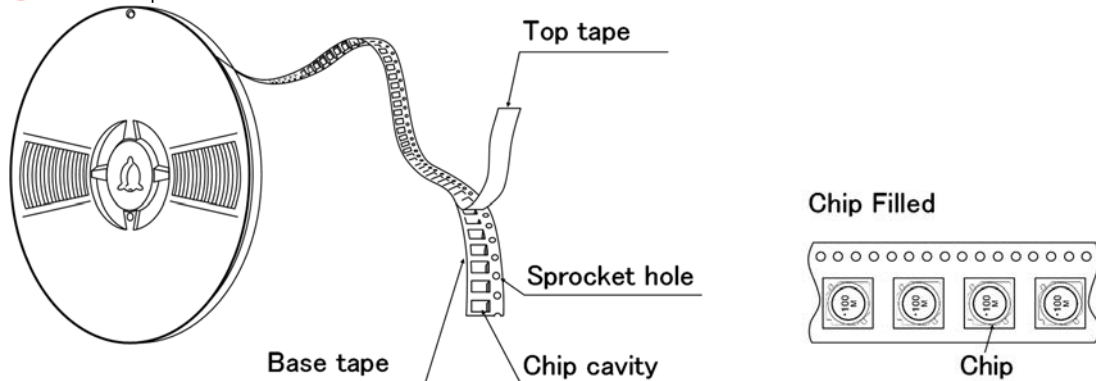

③ Taping dimensions


● Embossed tape 24mm wide (0.945 inches wide)

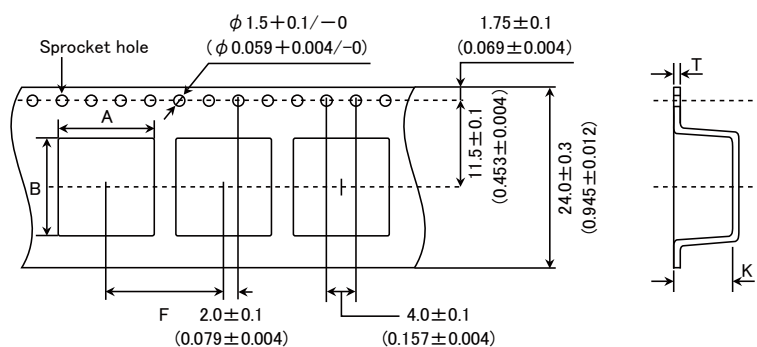


Type	Chip cavity		Insertion pitch	Tape thickness	
	A	B	F	T	K
10145	10.5±0.1 (0.413±0.004)	10.5±0.1 (0.413±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	5.0±0.1 (0.197±0.004)
10155	10.5±0.1 (0.413±0.004)	10.5±0.1 (0.413±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	6.0±0.1 (0.236±0.004)
10165	10.5±0.1 (0.413±0.004)	10.5±0.1 (0.413±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	7.0±0.1 (0.276±0.004)
12555	13.0±0.1 (0.512±0.004)	13.0±0.1 (0.512±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	6.1±0.1 (0.240±0.004)
12565	13.0±0.1 (0.512±0.004)	13.0±0.1 (0.512±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	7.1±0.1 (0.280±0.004)
12575	13.0±0.1 (0.512±0.004)	13.0±0.1 (0.512±0.004)	16.0±0.1 (0.630±0.004)	0.4±0.1 (0.016±0.004)	8.0±0.1 (0.315±0.004)

Unit : mm (inch)

④Leader and Blank portion

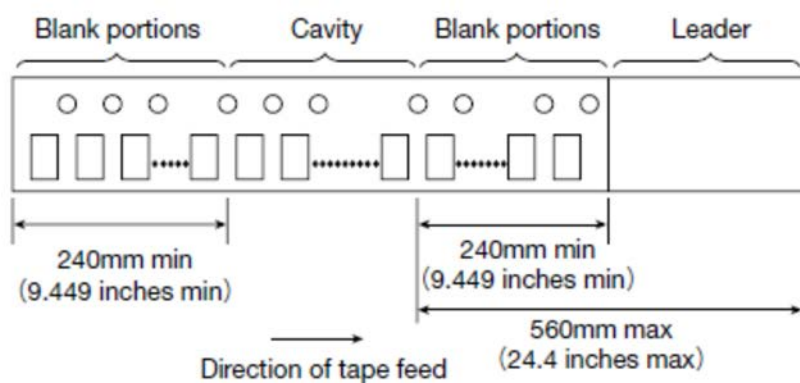

⑤Reel size

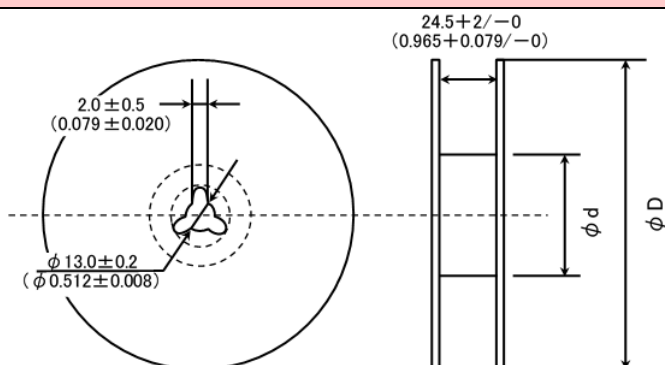


Type	Reel size (Reference values)	
	ϕD	ϕd
10145	330 ± 2 (12.99 ± 0.079)	100 ± 1 (3.937 ± 0.039)
10155		
10165		
12555		
12565		
12575		

Unit: mm (inch)

⑥Top Tape Strength

The top tape requires a peel-off force of 0.1 to 1.3N in the direction of the arrow as illustrated below.

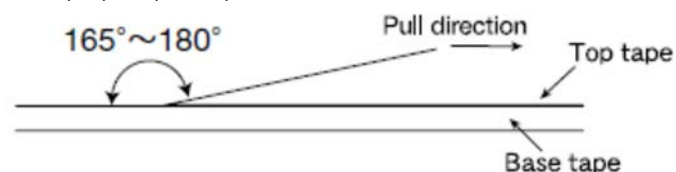

Wire-wound Ferrite Power Inductors LCRN series for Automotive Body & Chassis and Infotainment

■ RELIABILITY DATA

1. Operating Temperature Range

Specified Value	−40~+125°C (Including self-generated heat)
-----------------	--

Test Methods and Remarks	Including self-generated heat
--------------------------	-------------------------------

2. Storage Temperature Range

Specified Value	−40~+85°C
-----------------	-----------

Test Methods and Remarks	−5 to 40°C for the product with taping.
--------------------------	---

3. Rated current

Specified Value	Within the specified tolerance
-----------------	--------------------------------

4. Inductance

Specified Value	Within the specified tolerance
-----------------	--------------------------------

Test Methods and Remarks	Measuring equipment : LCR Meter (HP 4285A or equivalent) Measuring frequency : 100kHz, 1V
--------------------------	--

5. DC Resistance

Specified Value	Within the specified tolerance
-----------------	--------------------------------

Test Methods and Remarks	Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent)
--------------------------	--

6. High Temperature Exposure (Storage)

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 hours at 85 deg C Unpowered
--------------------------	-------------------------------------

7. Temperature Cycling

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 cycles (−40 deg C to +85 deg C) 30 min. maximum dwell time at each temperature extreme. 1 min. maximum transition time.
--------------------------	--

8. Biased Humidity


Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 hours, 85 deg C/85% RH. Unpowered
--------------------------	---


9. Operational Life

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 hours, 85 deg C Rated current
--------------------------	---------------------------------------

10. Resistance to Solvents	
Specified Value	Appearance: No significant abnormality in appearance.
Test Methods and Remarks	① Soak a test sample in isopropyl alcohol (IPA) at 25 ± 5 deg C for 3 to 3.5 minutes. ② Take the test sample out and brush 10 times using a brush soaked in IPA. ③ Repeat ① and ② twice more.
11. Mechanical Shock	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Apply 3 shocks in each direction along 3 mutually perpendicular axes of the test specimen (18 shocks in total). Peak value: 100g Duration: 6ms Test pulse: Half-sine Velocity change: 3.7m/s.
12. Vibration	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	5g's for 20 min., 12 cycles each of 3 orientations (36 cycles in total) Test from: 10 Hz to 2000 Hz
13. Resistance to Soldering Heat (Reflow)	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Reflow peak temperature: 250 ± 5 deg C Duration time: 30 ± 5 sec. Measure after inductors are kept at room temperature for 24 ± 4 hours.
14. ESD	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Per AEC-Q200-002
15. Solderability	
Specified Value	More than 90% of terminal electrode shall be covered with fresh solder.
Test Methods and Remarks	Per J-STD-002 a) Method B Solder at 235 ± 5 deg C for 5 sec. c) Method D Solder at 260 ± 5 deg C for 30 sec.
16. Board Flex	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Solder the test samples to the test boards by the reflow soldering. Apply a force in a downward direction until amount of deflection reaches 2mm. The 2-mm deflection shall be held for 60 sec. Test board dimensions: 100mm \times 40mm \times 1.6mm. 

17. Terminal Strength (SMD)	
-----------------------------	--

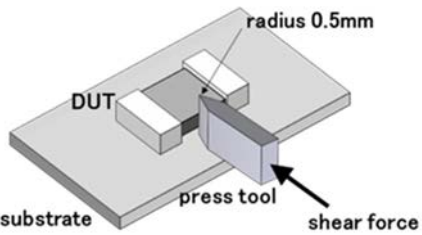Specified Value	Appearance :No significant abnormality in appearance.
Test Methods and Remarks	<p>Apply a force of 17.7N for 60±5 sec.</p> 

18. Standard condition	
------------------------	--

Specified Value	<p>Standard test condition :</p> <p>Unless otherwise specified, temperature is 20±15°C and 65±20%of relative humidity.</p> <p>When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of 20±2°C of temperature, 65±5% relative humidity.</p> <p>Inductance is in accordance with our measured value.</p>
-----------------	--

Wire-wound Ferrite Power Inductors LAYP series for Automotive Powertrain and safety

Wire-wound Ferrite Power Inductors LAXH series for Automotive Powertrain and safety

Wire-wound Ferrite Power Inductors LCXN/LCXP series for Automotive Body & Chassis and Infotainment

Wire-wound Ferrite Power Inductors LCXH series for Automotive Body & Chassis and Infotainment

Wire-wound Ferrite Inductors for Class D Amplifier LCXA for Automotive Body & Chassis and Infotainment

Wire-wound Ferrite Power Inductors LCRN series for Automotive Body & Chassis and Infotainment

Wire-wound Ferrite Power Inductors LBXN/LBXP series
for Telecommunications Infrastructure and Industrial Equipment

Wire-wound Ferrite Power Inductors LBXH series
for Telecommunications Infrastructure and Industrial Equipment

Wire-wound Ferrite Power Inductors LBRN series
for Telecommunications Infrastructure and Industrial Equipment

Wire-wound Ferrite Power Inductors LMXN/LMXP series
for Medical Devices classified as GHTF Class C (Japan Class III)

Wire-wound Ferrite Power Inductors LMXH series
for Medical Devices classified as GHTF Class C (Japan Class III)

Wire-wound Ferrite Power Inductors LMRN series
for Medical Devices classified as GHTF Class C (Japan Class III)


■ PRECAUTIONS

1. Circuit Design

Precautions	<p>◆ Verification of operating environment, electrical rating and performance</p> <ol style="list-style-type: none"> 1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications. 2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions. <p>◆ Operating Current (Verification of Rated current)</p> <ol style="list-style-type: none"> 1. The operating current including inrush current for inductors must always be lower than their rated values. 2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect. <p>◆ Temperature rise</p> <p>Temperature rise of power choke coil depends on the installation condition in end products. Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p>
-------------	---


2. PCB Design

Precautions	<p>◆ Land pattern design</p> <ol style="list-style-type: none"> 1. Please refer to a recommended land pattern. 2. There is stress, which has been caused by distortion of a PCB, to the inductor. (LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH) 3. Please consider the arrangement of parts on a PCB. (LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH)
Technical considerations	<p>◆ Land pattern design</p> <p>Surface Mounting</p> <ol style="list-style-type: none"> 1. Mounting and soldering conditions should be checked beforehand. 2. Applicable soldering process to this products is reflow soldering only. 3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH) 4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a ferrite core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. (LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH)

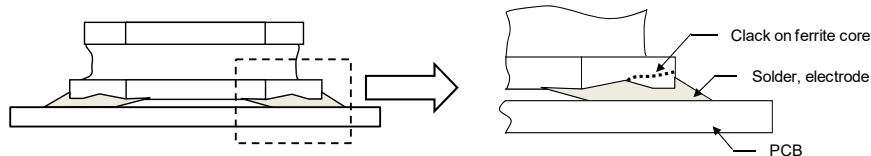



5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board.

(LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH)


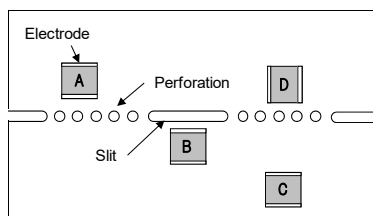


A product tends to undergo stress in order "A>C>B≡D". Please consider the layouts of a product to minimize any stresses.

3. Considerations for automatic placement

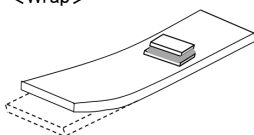Precautions	<p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> Excessive impact load should not be imposed on the products when mounting onto the PC boards. Mounting and soldering conditions should be checked beforehand.
Technical considerations	<p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> When installing products, care should be taken not to apply distortion stress as it may deform the products. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility. <p>(LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP, LCXH/LCXA/LBXH/LMXH)</p> <p><Wrap> </p> <p><Twist> </p>

4. Soldering

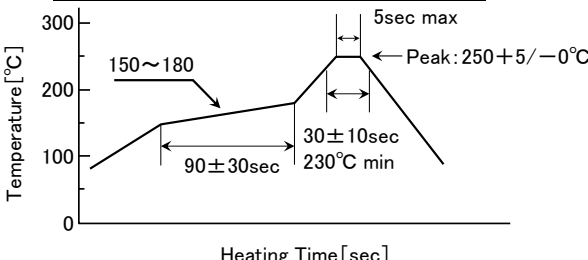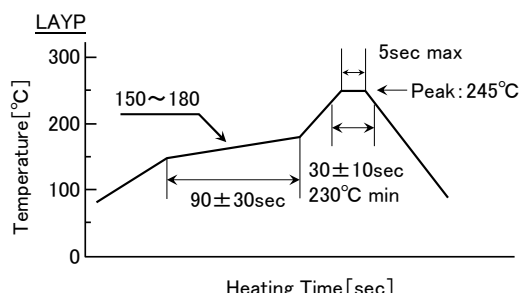Precautions	<p>◆Reflow soldering</p> <ol style="list-style-type: none"> Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified. The product shall be used reflow soldering only. Please do not add any stress to a product until it returns in normal temperature after reflow soldering. <p>◆Lead free soldering</p> <ol style="list-style-type: none"> When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently. <p>◆Recommended conditions for using a soldering iron(Repair)</p> <ul style="list-style-type: none"> Put the soldering iron on the land-pattern. Soldering iron's temperature – Below 350°C Duration – 3 seconds or less The soldering iron should not directly touch the inductor.
Technical considerations	<p>◆Reflow soldering</p> <ol style="list-style-type: none"> If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products. <p>Recommended reflow condition (Pb free solder)</p> <p><u>LAXH/LCXN/LCXP/LBXN/LBXP/LMXN/LMXP,</u> <u>LCXH/LCXA/LBXH/LMXH, LCRN/LBRN/LMRN</u></p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Temperature [°C]</p> <p>Heating Time [sec]</p> </div> <div style="text-align: center;">  <p>Temperature [°C]</p> <p>Heating Time [sec]</p> </div> </div>

5. Cleaning	
Precautions	<ul style="list-style-type: none"> ◆Cleaning conditions 1. Washing by supersonic waves shall be avoided.
Technical considerations	<ul style="list-style-type: none"> ◆Cleaning conditions 1. If washed by supersonic waves, the products might be broken.
6. Handling	
Precautions	<ul style="list-style-type: none"> ◆Handling 1. Keep the product away from all magnets and magnetic objects. ◆Breakaway PC boards (splitting along perforations) 1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board. 2. Board separation should not be done manually, but by using the appropriate devices. ◆Mechanical considerations 1. Please do not give the product any excessive mechanical shocks. 2. Please do not add any shock and power to a product in transportation. ◆Pick-up pressure 1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part. ◆Packing 1. Please avoid accumulation of a packing box as much as possible.
Technical considerations	<ul style="list-style-type: none"> ◆Handling 1. There is a case that a characteristic varies with magnetic influence. ◆Breakaway PC boards (splitting along perforations) 1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs. ◆Mechanical considerations 1. There is a case to be damaged by a mechanical shock. 2. There is a case to be broken by the handling in transportation. ◆Pick-up pressure 1. Damage and a characteristic can vary with an excessive shock or stress. ◆Packing 1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.
7. Storage conditions	
Precautions	<ul style="list-style-type: none"> ◆Storage 1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled. <ul style="list-style-type: none"> ▪ Storage conditions Ambient temperature : $-5\sim 40^{\circ}\text{C}$ Humidity : Below 70% RH ▪ The recommended ambient temperature is below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes. For this reason, product should be used within 6 months from the time of delivery. In case of storage over 6 months, solderability shall be checked before actual usage.
Technical considerations	<ul style="list-style-type: none"> ◆Storage 1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.