

PACKAGING SPECIFICATION

Ordering Information

Please order by the multiples of the minimum order quantity (MOQ).


Aluminum Electrolytic Capacitors

Classification		Case Size φD×L (mm)	Quantity (PCS.)						
			Long lead		Forming lead		Taping (04 Type)	Taping (Chip Type)	
			(Q'ty/Bag)	MOQ/Box	(Q'ty/Bag)	MOQ/Box	MOQ/Box	MOQ/Reel	(Q'ty/Box)
Conductive Polymer Hybrid Aluminum Electrolytic Capacitors	Chip Type	φ5 to φ6.3	—	—	—	—	—	1,000	5,000
		φ8,φ10×10	—	—	—	—	—	500	2,000
		φ10×12.5	—	—	—	—	—	400	1,600
		φ10×16.5	—	—	—	—	—	250	1,000
		φ12.5×13.5	—	—	—	—	—	200	1,000
Chip Type		φ6.3	—	—	—	—	—	1,000	5,000
		φ8,φ10	—	—	—	—	—	500	2,000
		φ12.5×13.5	—	—	—	—	—	200	1,000
		φ16×16.5,φ18×16.5	—	—	—	—	—	125	250
		φ16×21.5,φ18×21.5	—	—	—	—	—	75	150


Taping

Carrier tape dimension (taping polarity R)

● $\phi 4$ to $\phi 10$


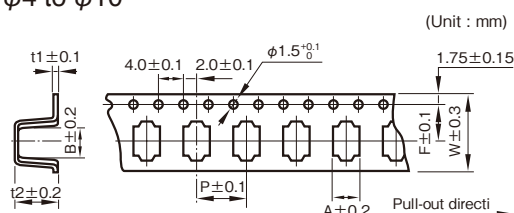


● $\phi 12.5$ to 18

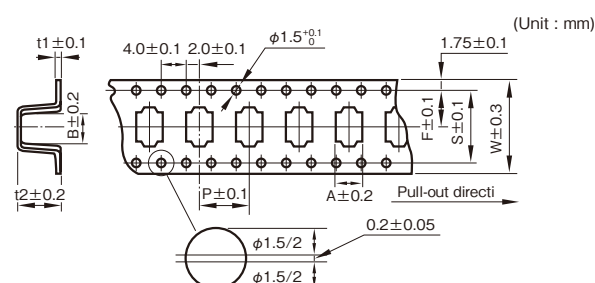


Taping polarity

(The all series except bipolar type)




Outside size $\phi D \times L$	W	A	B	P	t2	F	t1	S
5×5.8	12	5.7	5.7	12	6.2	5.5	0.4	—
6.3×5.8	16	7.0	7.0	12	6.2	7.5	0.4	—
6.3×7.7	16	7.0	7.0	12	8.3	7.5	0.4	—
8×10	24	8.7	8.7	16	11	11.5	0.4	—
10×10	24	10.7	10.7	16	11	11.5	0.4	—
10×12.5	24	10.7	10.7	16	13.5	11.5	0.5	—
10×16.5	24	10.7	10.7	20	17.5	11.5	0.5	—
* 12.5×13.5	32	13.4	13.4	24	14.5	14.2	0.5	28.4
* 16×16.5	44	17	17	28	17.5	20.2	0.5	40.4
* 16×21.5	44	17	17	28	22.5	20.2	0.5	40.4
* 18×16.5	44	19	19	32	17.5	20.2	0.5	40.4
* 18×21.5	44	19	19	32	22.5	20.2	0.5	40.4

Reel dimension



Outside size $\phi D \times L$	Reel dimension	
	W	t
5	14	3
6.3	18	3
8, 10	26	3
* 12.5	34	3
* 16	46	3
* 18	46	3



Packing quantity (Reel)

Outside size $\phi D \times L$	Quantity (PCS.)
5, 6.3	1000
8×10	500
10×10	500
10×12.5	400
10×16.5	250
* 12.5×13.5	200
* 16×16.5	125
* 16×21.5	75
* 18×16.5	125
* 18×21.5	75