

■ Limited Application

1. Equipment Intended for Use

The products listed in this catalog are intended for general-purpose and standard use in general electronic equipment for consumer (e.g., AV equipment, OA equipment, home electric appliances, office equipment, information and communication equipment including, without limitation, mobile phone, and PC) and other equipment specified in this catalog or the individual product specification sheets, or the equipment approved separately by TAIYO YUDEN.

TAIYO YUDEN has the product series intended for use in the following equipment. Therefore, when using our products for these equipment, please check available applications specified in this catalog or the individual product specification sheets and use the corresponding products.

Application	Product Series		Quality Grade ^{*3}
	Equipment ^{*1}	Category (Part Number Code ^{*2})	
Automotive	Automotive Electronic Equipment (POWERTRAIN, SAFETY)	A	1
	Automotive Electronic Equipment (BODY & CHASSIS, INFOTAINMENT)	C	2
Industrial	Telecommunications Infrastructure and Industrial Equipment	B	2
Medical	Medical Devices classified as GHTF Class C (Japan Class III)	M	2
	Medical Devices classified as GHTF Classes A or B (Japan Classes I or II)	L	3
Consumer	General Electronic Equipment	S	3

*Notes: 1. Based on the general specifications required for electronic components for such equipment, which are recognized by TAIYO YUDEN, the use of each product series for the equipment is recommended. Please be sure to contact TAIYO YUDEN before using our products for equipment other than those covered by the product series.

2. On each of our part number, the 2nd code from the left is a code indicating the "Category" as shown in the above table. For details, please check the explanatory materials regarding the part numbering system of each of our products.

3. Each product series is assigned a "Quality Grade" from 1 to 3 in order of higher quality. Please do not incorporate a product into any equipment with a higher Quality Grade than the Quality Grade of such product without the prior written consent of TAIYO YUDEN.

2. Equipment Requiring Inquiry

Please be sure to contact TAIYO YUDEN for further information before using the products listed in this catalog for the following equipment (excluding intended equipment as specified in this catalog or the individual product specification sheets) which may cause loss of human life, bodily injury, serious property damage and/or serious public impact due to a failure or defect of the products and/or malfunction attributed thereto.

- (1) Transportation equipment (automotive powertrain control system, train control system, and ship control system, etc.)
- (2) Traffic signal equipment
- (3) Disaster prevention equipment, crime prevention equipment
- (4) Medical devices classified as GHTF Class C (Japan Class III)
- (5) Highly public information network equipment, data-processing equipment (telephone exchange, and base station, etc.)
- (6) Any other equipment requiring high levels of quality and/or reliability equal to the equipment listed above

3. Equipment Prohibited for Use

Please do not incorporate our products into the following equipment requiring extremely high levels of safety and/or reliability.

- (1) Aerospace equipment (artificial satellite, rocket, etc.)
- (2) Aviation equipment ^{*1}
- (3) Medical devices classified as GHTF Class D (Japan Class IV), implantable medical devices ^{*2}
- (4) Power generation control equipment (nuclear power, hydroelectric power, thermal power plant control system, etc.)
- (5) Undersea equipment (submarine repeating equipment, etc.)
- (6) Military equipment
- (7) Any other equipment requiring extremely high levels of safety and/or reliability equal to the equipment listed above

*Notes: 1. There is a possibility that our products can be used only for aviation equipment that does not directly affect the safe operation of aircraft (e.g., in-flight entertainment, cabin light, electric seat, cooking equipment) if such use meets requirements specified separately by TAIYO YUDEN. Please be sure to contact TAIYO YUDEN for further information before using our products for such aviation equipment.

2. Implantable medical devices contain not only internal unit which is implanted in a body, but also external unit which is connected to the internal unit.

4. Limitation of Liability

Please note that unless you obtain prior written consent of TAIYO YUDEN, TAIYO YUDEN shall not be in any way responsible for any damages incurred by you or third parties arising from use of the products listed in this catalog for any equipment that is not intended for use by TAIYO YUDEN, or any equipment requiring inquiry to TAIYO YUDEN or prohibited for use by TAIYO YUDEN as described above.

A		<ul style="list-style-type: none"> ~ 001 ~ 001 ~ 001 ~ 00 ~ 00 ~ 00 ~ 00 0
		<ul style="list-style-type: none"> ~ 00 ~ 0001 ~ 000 ~ 001 0
C		<ul style="list-style-type: none"> ~ 00 ~ 00 ~ 00 ~ 001 ~ 001 ~ 0001 ~ 00 ~ 0001 ~ 00 ~ 0001
		<ul style="list-style-type: none"> ~ 00 ~ 001 ~ 001 ~ 001 ~ 00 ~ 00

Wire-wound Ferrite Bead Inductors for Power Lines LCMC/LCMG series for Automotive Body & Chassis and Infotainment

Code in front of Series have been extracted from Part number, which describes the segment of products, such as kinds and characteristics.

AEC-Q200 Grade 3 (we conduct the evaluation at the test condition of Grade 3.)

*Operating environment Temp:-40~85°C

REFLOW

AEC-Q200

PART NUMBER

*Operating Temp. : -40~125°C (Including self-generated heat)

L	C	M	C	C	3	2	1	6	1	1	T	8	0	0	R	G	
①	②	③	④	⑤	⑥	⑦	⑧										

①Series

Code (1)(2)(3)(4)	
LCMC	Wire-wound Ferrite Bead Inductors for Power Lines for Automotive Body & Chassis and Infotainment
LCMG	Wire-wound Ferrite Bead Inductors for Power Lines for Automotive Body & Chassis and Infotainment

(1) Product Group

Code	
L	Inductors

(3) Type

Code	
M	Ferrite Wire-wound bead

(2) Category

Code	Recommended equipment	Quality Grade
C	Automotive Electronic Equipment (Body & Chassis, Infotainment)	2

(4) Features, Characteristics

Code	
C	High current
G	High frequency

②Features

Code	Feature
A	Standard (20MHz)
C	Wave-shaping
G	For GHz noise

⑤Packaging

Code	Packaging
T	Taping

③Dimensions (L × W)

Code	Type (inch)	Dimensions (L × W) [mm]
1608	1608 (0603)	1.6 × 0.8
2012	2012 (0805)	2.0 × 1.25
2016	2016 (0806)	2.0 × 1.6
3216	3216 (1206)	3.2 × 1.6
3225	3225 (1210)	3.2 × 2.5
4516	4516 (1806)	4.5 × 1.6
4525	4525 (1810)	4.5 × 2.5

⑥Nominal impedance

Code (example)	Nominal impedance [Ω]
330	33
221	220
102	1000


④Dimensions (T)

Code	Dimensions (T) [mm]
08	0.8
	0.85
11	1.1
16	1.6
25	2.5


⑦Impedance tolerance

Code	Impedance tolerance
R	±25%
N	±30%

⑧Internal code

STANDARD EXTERNAL DIMENSIONS / STANDARD QUANTITY

Recommended Land Patterns
Surface Mounting

• Mounting and soldering conditions should be checked beforehand.



Type	A	B	C
1608	1.0	1.0	1.0
2012	1.4	1.2	1.65
2016	1.4	1.2	2.0
3216	1.4	2.2	2.0
3225	1.4	2.2	2.9
4516	1.75	3.5	2.0
4525	1.75	3.5	2.9

Unit: mm

Type	L	W	T	e	Standard quantity [pcs]	
					Paper tape	Embossed tape
160808 *1 (0603)	1.6±0.2 (0.063±0.008)	0.8±0.2 (0.031±0.008)	0.8±0.2 (0.031±0.008)	0.3±0.2 (0.012±0.008)	4000	—
160808 *2 (0603)	1.6±0.1 (0.063±0.004)	0.8±0.1 (0.031±0.004)	0.8±0.1 (0.031±0.004)	0.3±0.15 (0.012±0.006)	4000	—
201208 (0805)	2.0±0.2 (0.079±0.008)	1.25±0.2 (0.049±0.008)	0.85±0.2 (0.033±0.008)	0.5±0.3 (0.020±0.012)	4000	—
201616 (0806)	2.0±0.2 (0.079±0.008)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
321611 (1206)	3.2±0.3 (0.126±0.012)	1.6±0.2 (0.063±0.008)	1.1±0.2 (0.043±0.008)	0.5±0.3 (0.020±0.012)	—	2000
321616 (1206)	3.2±0.3 (0.126±0.012)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
322525 (1210)	3.2±0.3 (0.126±0.012)	2.5±0.3 (0.098±0.012)	2.5±0.3 (0.098±0.012)	0.5±0.3 (0.020±0.012)	—	1000
451611 (1806)	4.5±0.3 (0.177±0.012)	1.6±0.2 (0.063±0.008)	1.1±0.2 (0.043±0.008)	0.5±0.3 (0.020±0.012)	—	2000
451616 (1806)	4.5±0.3 (0.177±0.012)	1.6±0.2 (0.063±0.008)	1.6±0.2 (0.063±0.008)	0.5±0.3 (0.020±0.012)	—	2000
452525 (1810)	4.5±0.4 (0.177±0.016)	2.5±0.3 (0.098±0.012)	2.5±0.3 (0.098±0.012)	0.9±0.6 (0.035±0.024)	—	1000

*1 LCMC, *2 LCMG

Unit: mm (inch)

PART NUMBER

• All the Wire-wound Ferrite Bead Inductors for Power Lines of the catalog lineup are RoHS compliant.

Notes)

- The exchange of individual specifications is necessary depending on your application and/or circuit condition. Please contact TAIYO YUDEN's official sales channel.
- For Automotive (AEC-Q200 Qualified) products for BODY & CHASSIS, and INFOTAINMENT. Please check "Automotive Application Guide" for further details before using the products.

< AEC-Q200 :AEC-Q200 qualified>

All the Wire-wound Ferrite Bead Inductors for Power Lines for Automotive products are tested based on the test conditions and methods defined in AEC-Q200 by family item. Please consult with TAIYO YUDEN's official sales channel for the details of the product specifications and AEC-Q200 test results, etc., and please review and approve the product specifications before ordering.

Standard type

● 1608 (0603) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMCC160808T280NG	FB MJ1608HS280NTV	28	$\pm 30\%$	100	0.007	4.0	0.8 ± 0.2
LCMCA160808T230NG	FB MJ1608HM230NTV	23	$\pm 30\%$	100	0.007	4.0	0.8 ± 0.2

● 2012 (0805) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMCC201208T250NG	FB MJ2125HS250NTV	25	$\pm 30\%$	100	0.004	6.0	0.85 ± 0.2
LCMCC201208T420RG	FB MJ2125HS420-TV	42	$\pm 25\%$	100	0.008	4.0	0.85 ± 0.2
LCMCA201208T210NG	FB MJ2125HM210NTV	21	$\pm 30\%$	100	0.004	6.0	0.85 ± 0.2
LCMCA201208T330RG	FB MJ2125HM330-TV	33	$\pm 25\%$	100	0.008	4.0	0.85 ± 0.2
LCMCG201208T8R0NG	FB MJ2125HL8R0NTV	8	$\pm 30\%$	100	0.008	4.0	0.85 ± 0.2

● 3216 (1206) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMCC321611T480NG	FB MJ3216HS480NTV	48	$\pm 30\%$	100	0.005	6.0	1.1 ± 0.2
LCMCC321611T800RG	FB MJ3216HS800-TV	80	$\pm 25\%$	100	0.010	4.0	1.1 ± 0.2
LCMCA321611T380NG	FB MJ3216HM380NTV	38	$\pm 30\%$	100	0.005	6.0	1.1 ± 0.2
LCMCA321611T600RG	FB MJ3216HM600-TV	60	$\pm 25\%$	100	0.010	4.0	1.1 ± 0.2
LCMCG321611T160NG	FB MJ3216HL160NTV	16	$\pm 30\%$	100	0.012	4.0	1.1 ± 0.2

● 4516 (1806) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMCC451611T720NG	FB MJ4516HS720NTV	72	$\pm 30\%$	100	0.007	6.0	1.1 ± 0.2
LCMCC451611T111RG	FB MJ4516HS111-TV	110	$\pm 25\%$	100	0.014	4.0	1.1 ± 0.2
LCMCA451611T560NG	FB MJ4516HM560NTV	56	$\pm 30\%$	100	0.007	6.0	1.1 ± 0.2
LCMCA451611T900RG	FB MJ4516HM900-TV	90	$\pm 25\%$	100	0.014	4.0	1.1 ± 0.2
LCMCG451611T230NG	FB MJ4516HL230NTV	23	$\pm 30\%$	100	0.014	3.5	1.1 ± 0.2

High impedance type (GHz Band)

● 1608 (0603) type

New part number	Old part number (for reference)	Nominal impedance Measuring frequency 100 [MHz]		Nominal impedance Measuring frequency 1 [GHz]		DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
		(Ω)	tolerance	(Ω)	tolerance			
LCMGA160808T470RG	FB MH1608HM470-TV	47	$\pm 25\%$	75	$\pm 40\%$	0.020	3.5	0.8 ± 0.1
LCMGA160808T600RG	FB MH1608HM600-TV	60	$\pm 25\%$	100	$\pm 40\%$	0.025	3.0	0.8 ± 0.1
LCMGA160808T101RG	FB MH1608HM101-TV	100	$\pm 25\%$	170	$\pm 40\%$	0.035	2.5	0.8 ± 0.1
LCMGA160808T151RG	FB MH1608HM151-TV	150	$\pm 25\%$	270	$\pm 40\%$	0.050	2.1	0.8 ± 0.1
LCMGA160808T221RG	FB MH1608HM221-TV	220	$\pm 25\%$	370	$\pm 40\%$	0.070	1.8	0.8 ± 0.1
LCMGA160808T331RG	FB MH1608HM331-TV	330	$\pm 25\%$	520	$\pm 40\%$	0.130	1.2	0.8 ± 0.1
LCMGA160808T471RG	FB MH1608HM471-TV	470	$\pm 25\%$	750	$\pm 40\%$	0.150	1.0	0.8 ± 0.1
LCMGA160808T601RG	FB MH1608HM601-TV	600	$\pm 25\%$	900	$\pm 40\%$	0.170	0.9	0.8 ± 0.1
LCMGA160808T102RG	FB MH1608HM102-TV	1000	$\pm 25\%$	1200	$\pm 40\%$	0.350	0.6	0.8 ± 0.1
LCMGG160808T300RG	FB MH1608HL300-TV	30	$\pm 25\%$	120	$\pm 40\%$	0.028	2.6	0.8 ± 0.1
LCMGG160808T600RG	FB MH1608HL600-TV	60	$\pm 25\%$	220	$\pm 40\%$	0.045	2.1	0.8 ± 0.1
LCMGG160808T121RG	FB MH1608HL121-TV	120	$\pm 25\%$	540	$\pm 40\%$	0.130	1.2	0.8 ± 0.1
LCMGG160808T221RG	FB MH1608HL221-TV	220	$\pm 25\%$	950	$\pm 40\%$	0.170	0.9	0.8 ± 0.1
LCMGG160808T331RG	FB MH1608HL331-TV	330	$\pm 25\%$	1200	$\pm 40\%$	0.210	0.8	0.8 ± 0.1
LCMGG160808T471RG	FB MH1608HL471-TV	470	$\pm 25\%$	1500	$\pm 40\%$	0.350	0.6	0.8 ± 0.1
LCMGG160808T601RG	FB MH1608HL601-TV	600	$\pm 25\%$	1800	$\pm 40\%$	0.450	0.5	0.8 ± 0.1

※) The rated current is the value of current at which the temperature of the element is increased by 40 deg.

PART NUMBER

High impedance type

● 2012 (0805) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA201208T800RG	FB MH2012HM800-TV	80	$\pm 25\%$	100	0.025	2.7	0.85 ± 0.2
LCMGA201208T121RG	FB MH2012HM121-TV	120	$\pm 25\%$	100	0.032	2.5	0.85 ± 0.2
LCMGA201208T221RG	FB MH2012HM221-TV	220	$\pm 25\%$	100	0.060	2.0	0.85 ± 0.2
LCMGA201208T331RG	FB MH2012HM331-TV	330	$\pm 25\%$	100	0.080	1.8	0.85 ± 0.2

● 2016 (0806) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA201616T121NG	FB MH2016HM121NTV	120	$\pm 30\%$	100	0.015	4.5	1.6 ± 0.2
LCMGA201616T251NG	FB MH2016HM251NTV	250	$\pm 30\%$	100	0.050	2.0	1.6 ± 0.2

● 3216 (1206) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA321616T221NG	FB MH3216HM221NTV	220	$\pm 30\%$	100	0.020	4.0	1.6 ± 0.2
LCMGA321616T501NG	FB MH3216HM501NTV	500	$\pm 30\%$	100	0.070	2.0	1.6 ± 0.2

● 3225 (1210) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA322525T601NG	FB MH3225HM601NTV	600	$\pm 30\%$	100	0.042	3.0	2.5 ± 0.3
LCMGA322525T102NG	FB MH3225HM102NTV	1000	$\pm 30\%$	100	0.100	2.0	2.5 ± 0.3
LCMGA322525T202NG	FB MH3225HM202NTV	2000	$\pm 30\%$	100	0.130	1.2	2.5 ± 0.3

● 4516 (1806) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA451616T851NG	FB MH4516HM851NTV	850	$\pm 30\%$	100	0.100	1.5	1.6 ± 0.2

● 4525 (1810) type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMGA452525T102NG	FB MH4525HM102NTV	1000	$\pm 30\%$	100	0.060	3.0	2.5 ± 0.3
LCMGA452525T162NG	FB MH4525HM162NTV	1600	$\pm 30\%$	100	0.130	2.0	2.5 ± 0.3

● High current type

New part number	Old part number (for reference)	Nominal impedance (Ω)	Impedance tolerance	Measuring frequency [MHz]	DC Resistance [Ω] (max.)	Rated current [A] (max.)	Thickness [mm]
LCMCC160808T220NGR	FB MJ1608HS220NTW	22	$\pm 30\%$	100	0.004	7.5	0.8 ± 0.2
LCMCC160808T280NGR	FB MJ1608HS280NTW	28	$\pm 30\%$	100	0.006	6.0	0.8 ± 0.2
LCMCA160808T180NGR	FB MJ1608HM180NTW	18	$\pm 30\%$	100	0.004	7.5	0.8 ± 0.2
LCMCA160808T230NGR	FB MJ1608HM230NTW	23	$\pm 30\%$	100	0.006	6.0	0.8 ± 0.2







※) The rated current is the value of current at which the temperature of the element is increased by 40 deg.

ELECTRICAL CHARACTERISTICS







Standard type

1608 type




2012 type

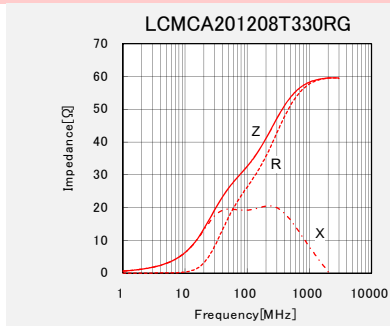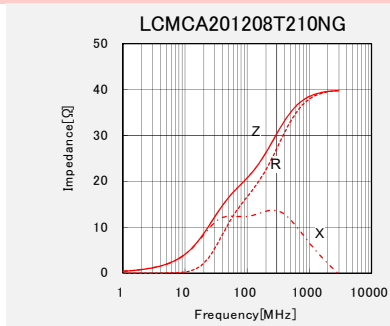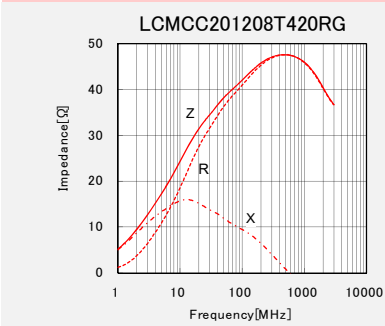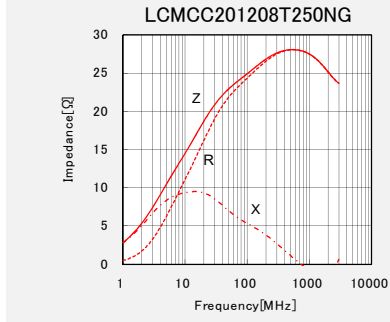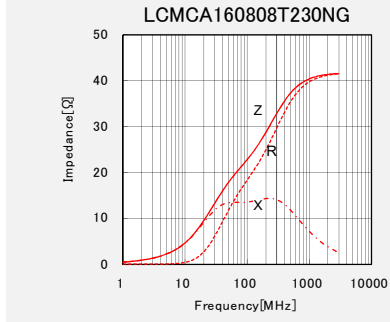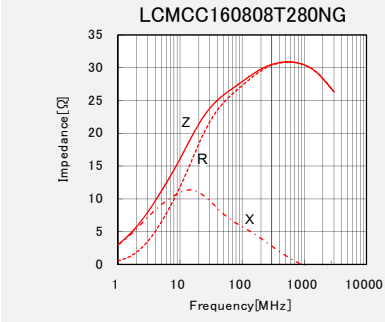

3216 type

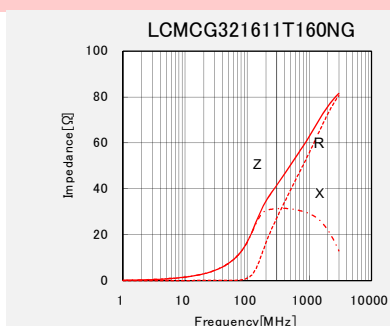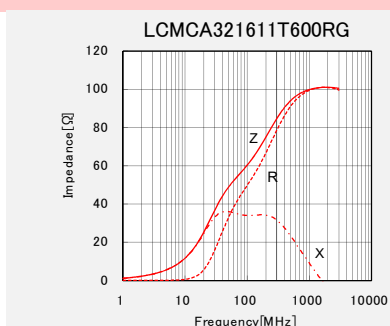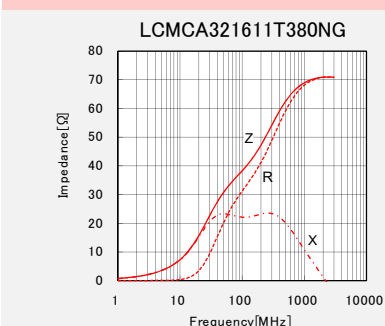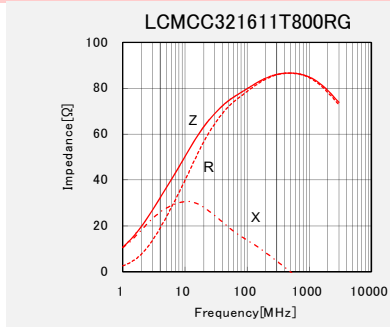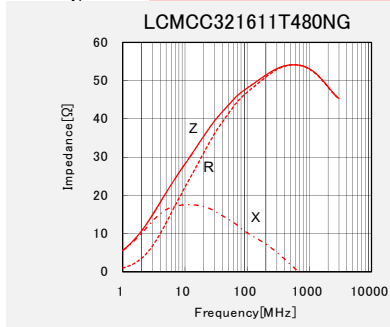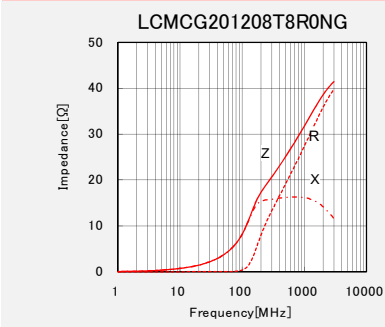


4516 type

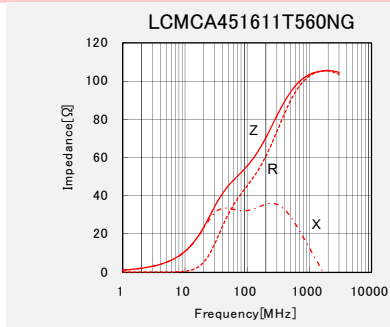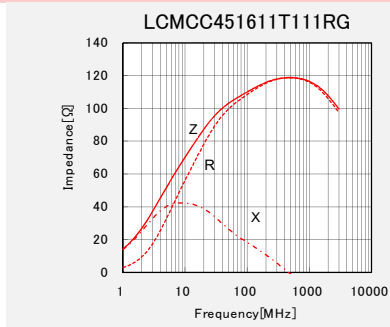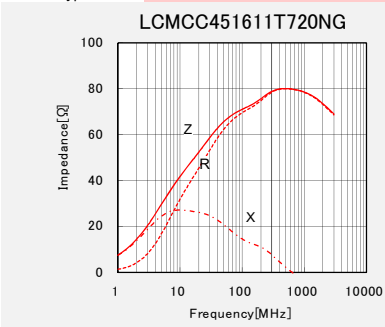





▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

ELECTRICAL CHARACTERISTICS

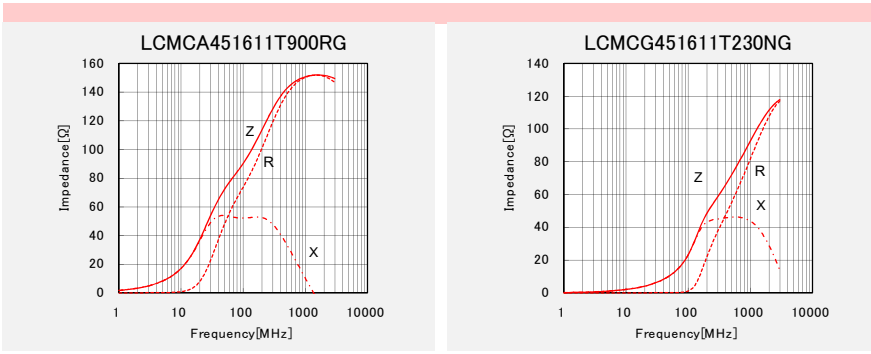



High impedance type(GHz Band)

■ 1608 type

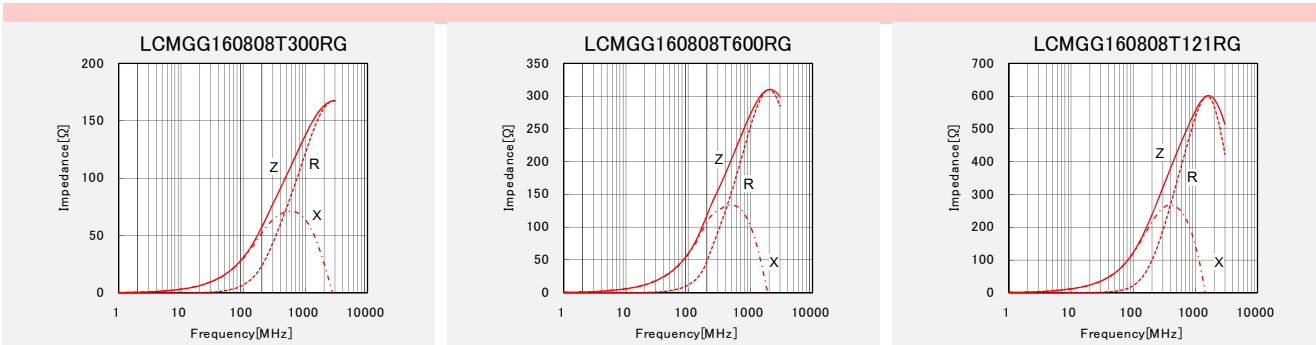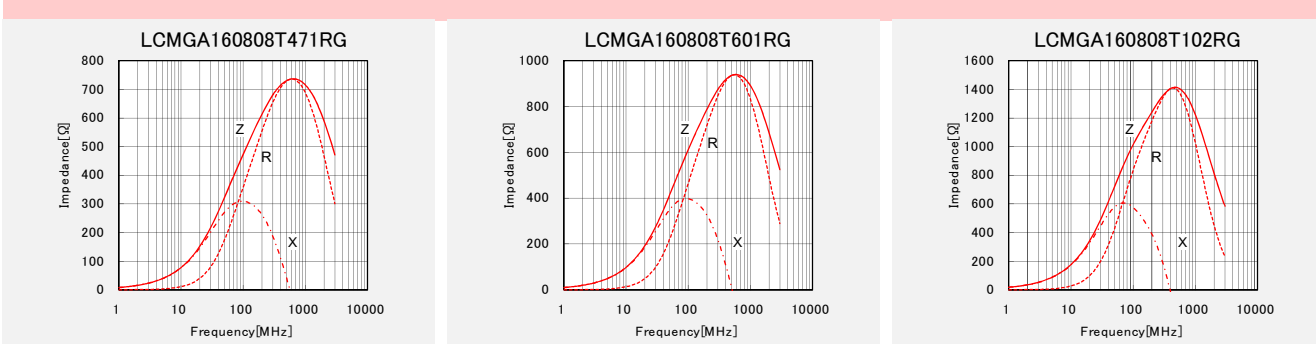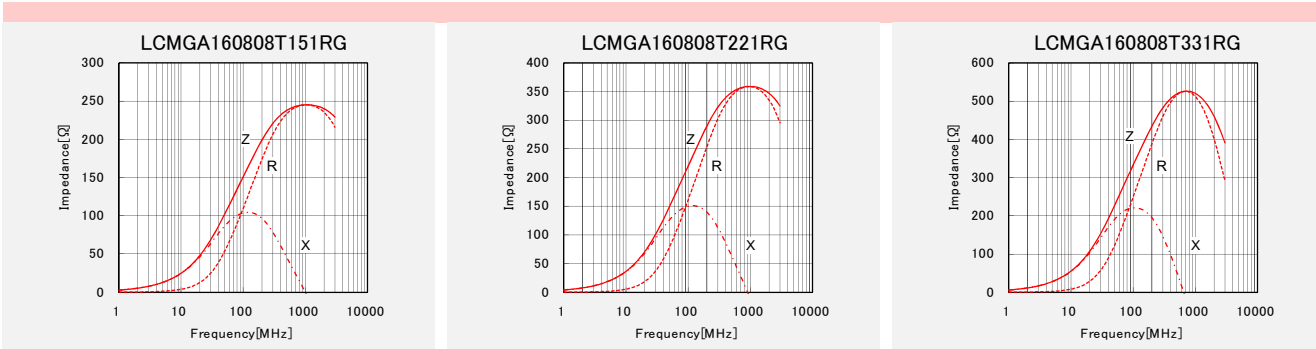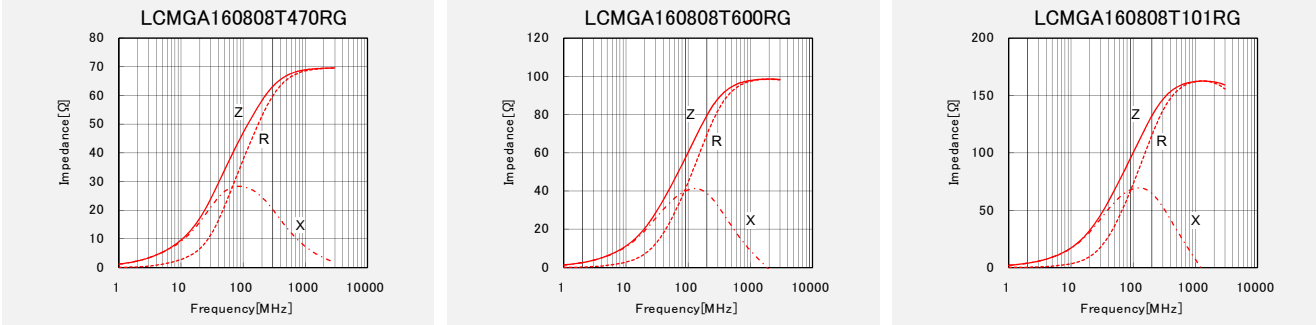



▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

ELECTRICAL CHARACTERISTICS

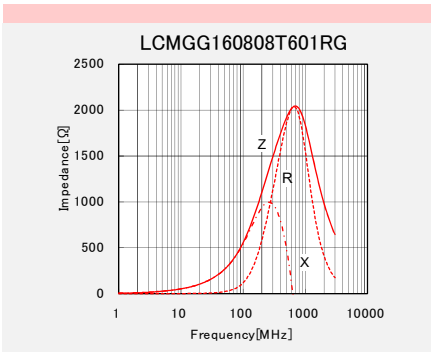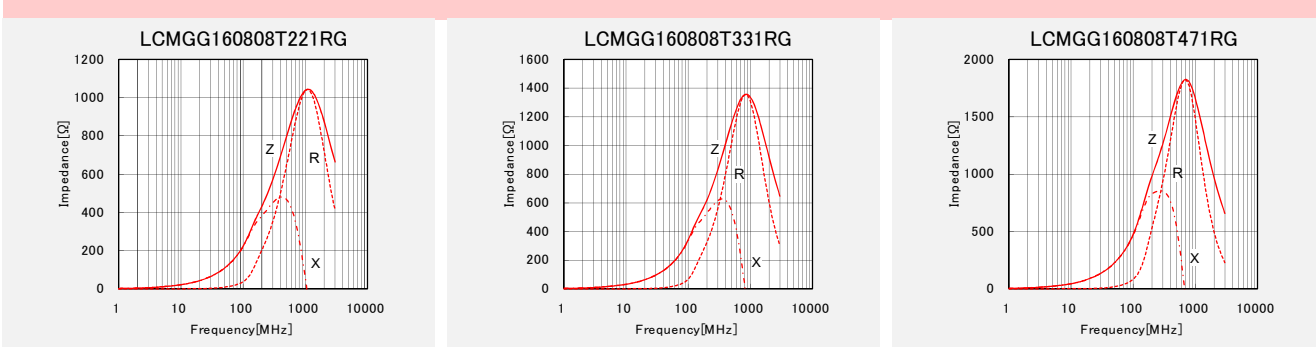


High impedance type


■ 2012 type

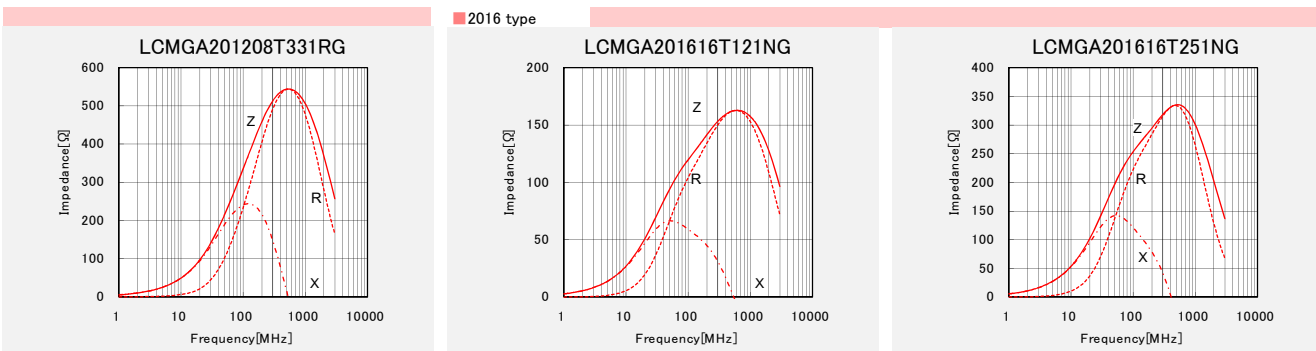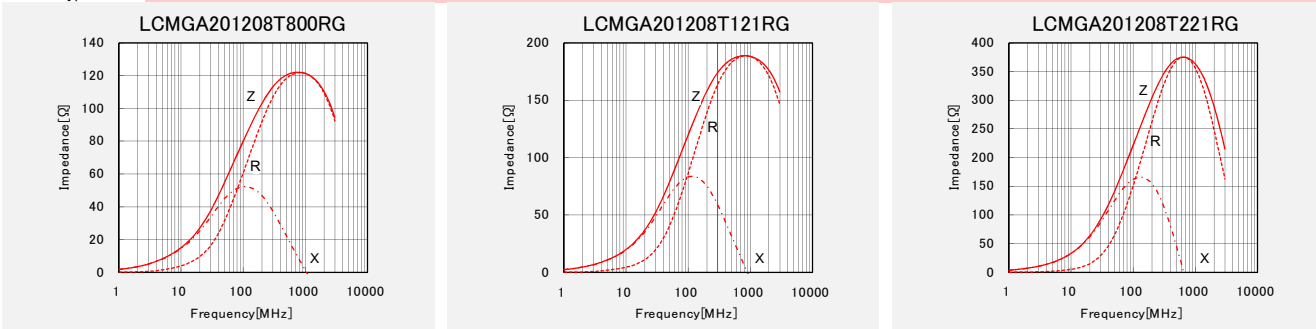

■ 3216 type

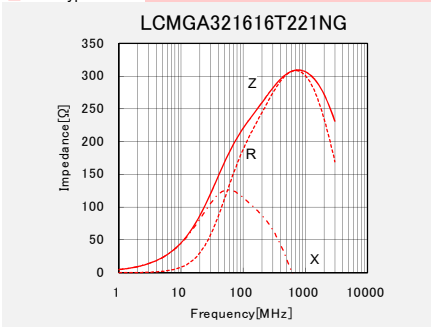


■ 3225 type

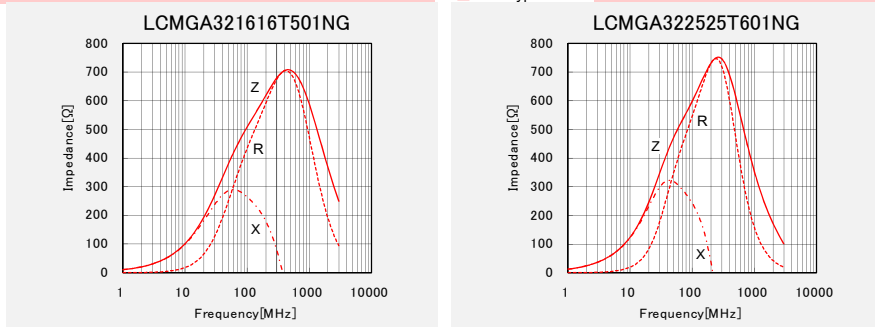

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


■ ELECTRICAL CHARACTERISTICS

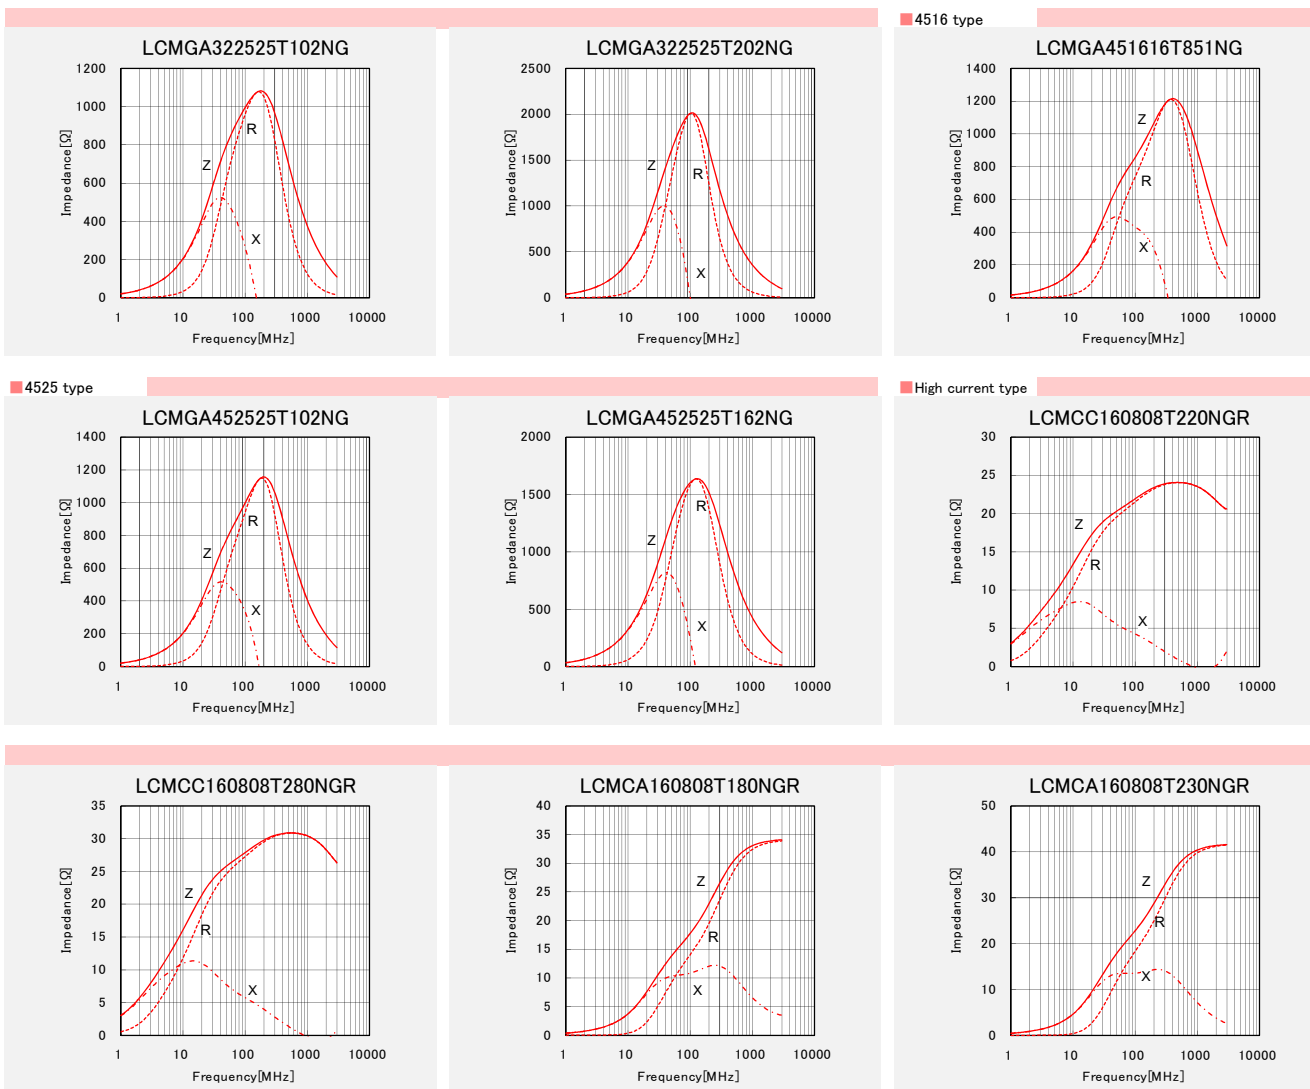

■ Derating of Rated Current

● LCMC/LCMG series

Derating of current is necessary for LCMC/LCMG series depending on ambient temperature. Please refer to the chart shown below for appropriate derating of current.

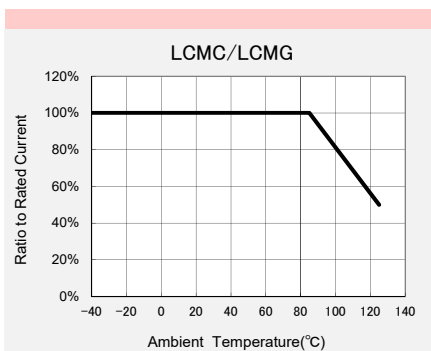

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Wire-wound Ferrite Bead Inductors for Power Lines LSMC/LSMG/LAMG/LCMC/LCMG/LBMC/LBMG/LLMC/LLMG/LMMC/LMMG series


PACKAGING

① Minimum Quantity


Type	Standard Quantity [pcs]	
	Paper Tape	Embossed Tape
1608(0603)	4000	—
2125(0805)	4000	—
2012(0805)	4000	—
2016(0806)	—	2000
3216(1206)	—	2000
3225(1210)	—	1000
4516(1806)	—	2000
4525(1810)	—	1000
4532(1812)	—	2000

② Tape Material

● Card board carrier tape

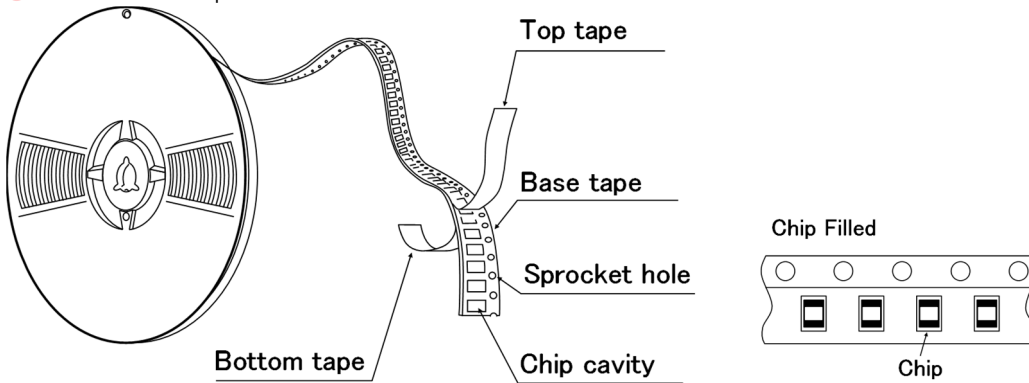


● Embossed tape

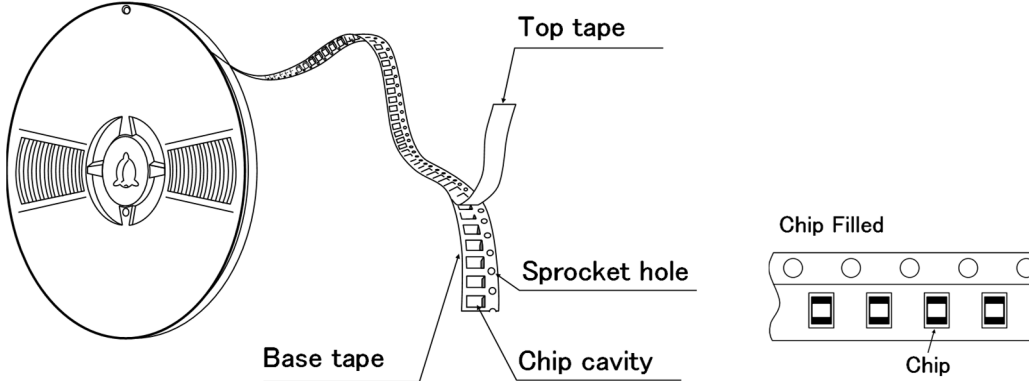

③ Taping Dimensions

● Paper tape (0.315 inches wide)

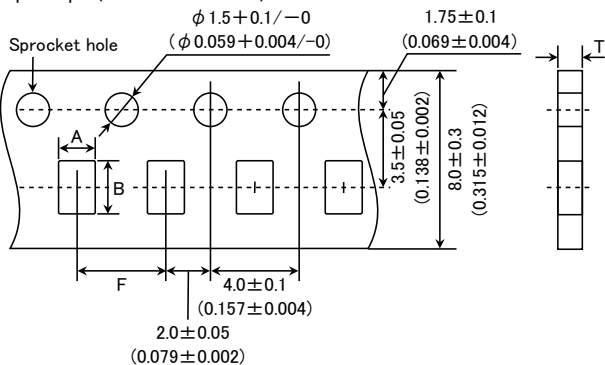


► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

Type	Chip Cavity		Insertion Pitch	Tape Thickness
	A	B	F	T
1608 (0603)	1.0±0.2 (0.039±0.008)	1.8±0.2 (0.071±0.008)	4.0±0.2 (0.157±0.008)	1.1max (0.043max)
2012 (0805)	1.5±0.2 (0.059±0.008)	2.3±0.2 (0.091±0.008)	4.0±0.2 (0.157±0.008)	1.1max (0.043max)

Unit : mm (inch)

● Embossed tape (0.315 inches wide)

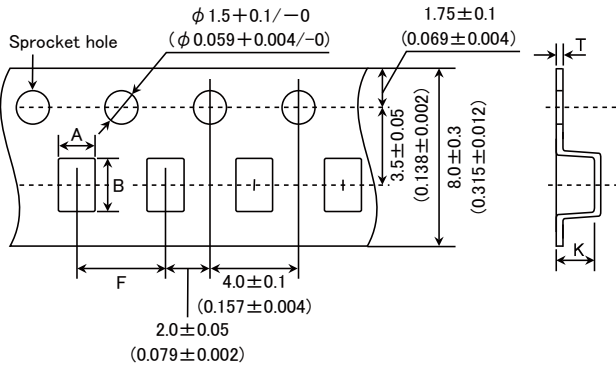


Type	Chip Cavity		Insertion Pitch	Tape Thickness	
	A	B	F	K	T
2016 (0806)	1.8±0.2 (0.071±0.008)	2.2±0.2 (0.087±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
3216 *1 (1206)	1.9±0.2 (0.075±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	1.5max (0.059max)	0.3max (0.012max)
3216 *2 (1206)	1.9±0.2 (0.075±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
3225 (1210)	2.8±0.2 (0.110±0.008)	3.5±0.2 (0.138±0.008)	4.0±0.2 (0.157±0.008)	4.0max (0.157max)	0.6max (0.024max)

Unit : mm (inch)

* 1 LSMC/LCMC/LBMC/LLMC/LMMC

* 2 LSMG/LAMG/LCMG/LBMG/LLMG/LMMG

● Embossed tape (0.472 inches wide)

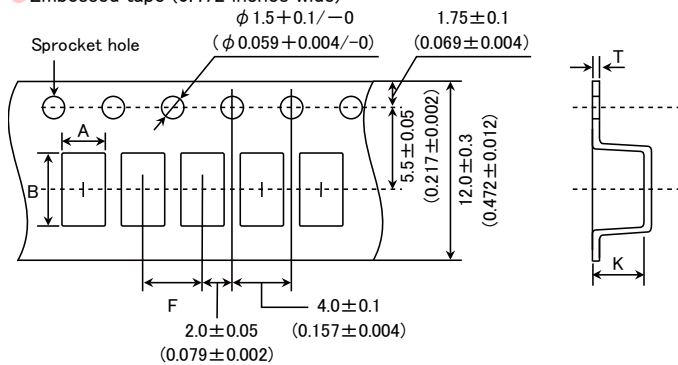

Type	Chip Cavity		Insertion Pitch	Tape Thickness	
	A	B	F	K	T
4516 *1 (1806)	1.9±0.2 (0.075±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	1.5max (0.059max)	0.3max (0.012max)
4516 *2 (1806)	1.9±0.2 (0.075±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	2.6max (0.102max)	0.6max (0.024max)
4525 (1810)	2.9±0.2 (0.114±0.008)	4.9±0.2 (0.193±0.008)	4.0±0.2 (0.157±0.008)	4.0max (0.157max)	0.6max (0.024max)
4532 (1812)	3.6±0.2 (0.142±0.008)	4.9±0.2 (0.193±0.008)	8.0±0.2 (0.315±0.008)	4.0max (0.157max)	0.6max (0.024max)


Unit : mm (inch)

* 1 LSMC/LCMC/LBMC/LLMC/LMMC

* 2 LSMG/LAMG/LCMG/LBMG/LLMG/LMMG


▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

④ Leader and Blank portion

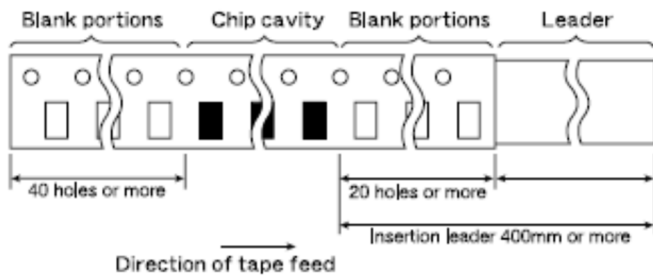

Insertion leader is 400 mm or more (including 20 empty cavities)
 Empty cavities at end of reel: 40 holes or more


⑤ Reel size

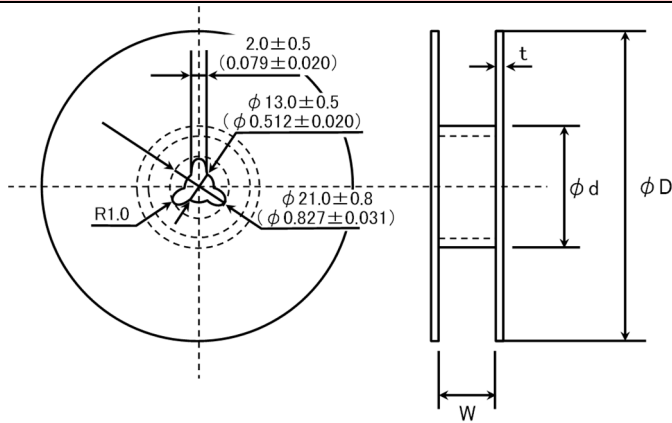

Type	ϕD	ϕd	W	t
1608(0603) 2012(0805) 2016(0806) 3216(1206) 3225(1210)	180+0/-3 (7.09+0/-0.118)	60+1/-0 (2.36+0.039/-0)	10.0±1.5 (0.394±0.059)	2.5max (0.098max)
4516(1806) 4525(1810)			14.0±1.5 (0.551±0.059)	
4532(1812)	330±2.0 (12.99±0.080)	100±1.0 (3.94±0.039)	14.0±2.0 (0.551±0.080)	3.0max (1.181max)

Unit : mm (inch)

⑥ Top tape strength

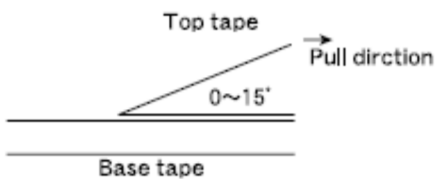

The top tape requires a peel-off force of 0.1 to 0.7N in the direction of the arrow as illustrated below.

**Wire-wound Ferrite Bead Inductors for Power Lines LCMC/LCMG series
for Automotive Body & Chassis and Infotainment**

**Wire-wound Ferrite Bead Inductors for Power Lines LBMC/LBMG series
for Telecommunications Infrastructure and Industrial Equipment**

**Wire-wound Ferrite Bead Inductors for Power Lines LMMC/LMMG series
for Medical Devices classified as GHTF Class C (Japan Class III)**

■ RELIABILITY DATA

1. Operating Temperature Range

Specified Value $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$ (Including self-generated heat)

Test Methods and Remarks Including self-generated heat

2. Storage Temperature Range

Specified Value $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Test Methods and Remarks *Note: -5 to $+40^{\circ}\text{C}$ in taped packaging

3. Impedance

Specified Value Within the specified range

Test Methods and Remarks Measuring equipment : Impedance analyzer (HP4291A) or its equivalent
Measuring frequency : 100 ± 1 MHz

4. DC Resistance

Specified Value Within the specified range

Test Methods and Remarks Four-terminal method
Measuring equipment : Milliohm High-Tester 3226 (Hioki Denki) or its equivalent

5. Rated Current

Specified Value Within the specified range

6. Vibration

Specified Value Appearance : No significant abnormality
Impedance change : Within $\pm 30\%$ of the initial value

Test Methods and Remarks The test samples shall be soldered to the test board by the reflow.
Then it shall be submitted to below test conditions.

Frequency	10~2000Hz	
Total Amplitude	5G	
Sweeping Method	20min (10→2000→10Hz)	
Time	X	4hours
	Y	
	Z	

7. Solderability

Specified Value 90% or more of immersed surface of terminal electrode shall be covered with fresh solder.

Test Methods and Remarks	Solder Temperature	$230 \pm 5^{\circ}\text{C}$
	Time	4 ± 1 sec
	Preconditioning	Immersion into flux.
	Immersing Speed	25mm/sec

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

8. Resistance to Soldering Heat

Specified Value	Appearance : No significant abnormality Impedance change : Within $\pm 30\%$ of the initial value
Test Methods and Remarks	Preheating : 150°C 3min
	Solder Temperature : 260 \pm 5°C
	Time : 30 \pm 0.5sec
	Preconditioning : Immersion into flux.
	Immersing Speed : 25mm/s
The measurement, after the test, shall be carried out the test sample has been left for 2 to 3 hours.	

9. Thermal Shock

Specified Value	Appearance : No significant abnormality Impedance change : Within +50/−10% of the initial value															
Test Methods and Remarks	Conditions for 1 cycle															
	<table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Duration (min.)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>−40\pm3°C</td> <td>30\pm3</td> </tr> <tr> <td>2</td> <td>Room Temperature</td> <td>Within 3</td> </tr> <tr> <td>3</td> <td>125\pm2°C</td> <td>30\pm3</td> </tr> <tr> <td>4</td> <td>Room Temperature</td> <td>Within 3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Duration (min.)	1	−40 \pm 3°C	30 \pm 3	2	Room Temperature	Within 3	3	125 \pm 2°C	30 \pm 3	4	Room Temperature	Within 3
	Step	Temperature (°C)	Duration (min.)													
	1	−40 \pm 3°C	30 \pm 3													
	2	Room Temperature	Within 3													
	3	125 \pm 2°C	30 \pm 3													
4	Room Temperature	Within 3														
Number of cycles : 1000																
Mounting method : Soldering onto PC board																
The measurement, after the test, shall be carried out the test sample has been left for 2 to 3 hours.																

10. Resistance to Humidity (steady state)

Specified Value	Appearances : No significant abnormality Impedance change : Within $\pm 30\%$ of the initial value						
Test Methods and Remarks	The test samples shall be soldered to the test board by the reflow.						
	The test samples shall be placed in thermostatic oven set at specified temperature and humidity as shown in below table.						
	<table border="1"> <tbody> <tr> <td>Temperature</td> <td>40\pm2°C</td> </tr> <tr> <td>Humidity</td> <td>90~95%RH</td> </tr> <tr> <td>Time</td> <td>1000+24/−0 hour</td> </tr> </tbody> </table>	Temperature	40 \pm 2°C	Humidity	90~95%RH	Time	1000+24/−0 hour
	Temperature	40 \pm 2°C					
	Humidity	90~95%RH					
Time	1000+24/−0 hour						
The measurement, after the test, shall be carried out the test sample has been left for 2 to 3 hours.							

11. Loading under Damp Heat

Specified Value	Appearance : No significant abnormality Impedance change : Within $\pm 30\%$ of the initial value								
Test Methods and Remarks	The test samples shall be soldered to the test board by the reflow soldering.								
	The test samples shall be placed in thermostatic oven set at specified temperature, humidity, and applied the rated current continuously as shown in below table.								
	<table border="1"> <tbody> <tr> <td>Temperature</td> <td>85\pm2°C</td> </tr> <tr> <td>Humidity</td> <td>85%RH</td> </tr> <tr> <td>Applied current</td> <td>Rated current</td> </tr> <tr> <td>Time</td> <td>1000+24/−0 hour</td> </tr> </tbody> </table>	Temperature	85 \pm 2°C	Humidity	85%RH	Applied current	Rated current	Time	1000+24/−0 hour
	Temperature	85 \pm 2°C							
	Humidity	85%RH							
	Applied current	Rated current							
Time	1000+24/−0 hour								
The measurement, after the test, shall be carried out the test sample has been left for 2 to 3 hours.									

12. High Temperature Loading Test

Specified Value	Appearance : No significant abnormality Impedance change : Within $\pm 30\%$ of the initial value						
Test Methods and Remarks	The test samples shall be soldered to the test board by the reflow soldering.						
	The test samples shall be placed in thermostatic oven set at specified temperature and applied the rated current continuously as shown in below table.						
	<table border="1"> <tbody> <tr> <td>Temperature</td> <td>85\pm2°C</td> </tr> <tr> <td>Applied current</td> <td>Rated current</td> </tr> <tr> <td>Time</td> <td>1000+24/−0 hour</td> </tr> </tbody> </table>	Temperature	85 \pm 2°C	Applied current	Rated current	Time	1000+24/−0 hour
	Temperature	85 \pm 2°C					
	Applied current	Rated current					
Time	1000+24/−0 hour						
The measurement, after the test, shall be carried out the test sample has been left for 2 to 3 hours.							