

# 有关敝公司产品的注意事项

请务必在使用敝公司产品之前阅读。



注意

## 产品目录中的记载内容

本产品目录中所记载的内容为2023年3月的内容。因产品改良等原因，可能会不经预告而变更其记载内容，或是停止供应本产品目录中所记载的产品。所以，请务必在使用前先确认最新的产品信息。

未按照本产品目录中所记载的内容或交货规格说明书使用敝公司产品的，即便其致使用设备发生损害、不良情况等时，敝公司也不承担任何责任，敬请知悉。

## 签署交货规格说明书

就本产品目录中所记载产品的产品规格等相关内容，敝公司备有交货规格说明书，详情请向敝公司咨询。在使用敝公司产品前请务必就交货规格说明书之内容确认并批准之。

## 实装前的事前评估

使用敝公司产品时，请务必事先安装到使用设备之后，在实际使用的环境下进行评估和确认。

## 用途的限定

### 1. 可以使用的设备

本产品目录中所记载的产品预设为使用于一般民用电子设备〔音像设备、办公自动化设备、家电产品、办公设备、信息通讯设备（手机、电脑等）〕以及面向本产品目录或是交货规格说明书中另行注明的设备或是敝公司另行承诺的设备的通用性，标准性用途。另外，面向下述设备的应用，敝公司也备有预设的产品系列，请参考本产品目录或是交货规格说明书的内容，使用相对应的产品。

| 用途 | 产品系列                    |                                 | 品质等级 <sup>(注释3)</sup> |
|----|-------------------------|---------------------------------|-----------------------|
|    | 对象设备 <sup>(注释1)</sup>   | 规格号<br>(型号标记 <sup>(注释2)</sup> ) |                       |
| 车载 | 汽车用电子设备（控制系 / 安全系）      | A                               | 1                     |
|    | 汽车用电子设备（车身系 / 情报系）      | C                               | 2                     |
| 工业 | 通信基础设备·工业设备             | B                               | 2                     |
| 医疗 | 医疗设备（国际（GHTF）第三类）       | M                               | 2                     |
|    | 医疗设备（国际（GHTF）第一类、第二类）   | L                               | 3                     |
| 民用 | 一般电子设备                  | S                               | 3                     |
|    | 移动设备专用 <sup>(注释4)</sup> | E                               | 4                     |

注释1：基于敝公司所认知的该类设备对于电子元器件所需的一般要求规格，对于该产品系列进行的应用推荐。在讨论将各个产品系列使用在对象设备以外的设备上时，请务必事先向敝公司咨询。

注释2：在产品型号中左起第2位标注有上表中所记载的“规格号”。对于相关的详细内容，请参照有关各产品型号标示法的说明资料。

注释3：在各产品系列中，都设定了从上至下1至4的“品质等级”。另外，在未得到敝公司的事前书面承诺之前，请勿将敝公司的产品使用于相对于该产品的品质等级被设定为上位品质等级的设备。

注释4：本产品系列仅可应用于一般民用电子设备中的移动设备（智能手机、平板电脑、智能手表、掌上游戏机等）。由于其设计、规格和使用环境与面向“一般电子设备”的产品系列（规格号：S）不同，有关本产品系列的详细信息请参照交货规格说明书。另外，面向“一般电子设备”的产品系列（规格号：S）也可以应用于移动设备。

## 2. 需要另行确认的设备

若考虑将本产品目录中所记载的产品使用于当产品发生故障、品质不良，或是由此引起的运转失常而可能会危及生命、身体或是财产，以及有可能给社会造成深刻影响的以下设备（不包括本产品目录或是交货规格说明书中另行注明可以使用设备）等时，请务必事先向敝公司咨询。

- (1) 运输用设备（汽车驱动控制设备、火车控制设备、船舶控制设备等）
- (2) 交通信号设备
- (3) 防灾 / 保安设备
- (4) 医疗设备（国际（GHTF）第三类）
- (5) 高公共性信息通讯设备 / 信息处理设备（电话交换机、电话 / 无线 / 广播电视基站等）
- (6) 其他与上述设备有同等品质与可靠性要求的设备

## 3. 禁止使用的设备

请勿将敝公司产品使用于对安全性和可靠性有着极高要求的以下设备。

- (1) 航天设备（人工卫星、火箭等）
- (2) 航空设备<sup>(注释1)</sup>
- (3) 医疗设备（国际（GHTF）第四类）、植体（体内植入型）医疗设备<sup>(注释2)</sup>
- (4) 发电控制设备（面向核能 / 水力 / 火力发电厂等的设备）
- (5) 海底设备（海底中继设备、海中的作业设备等）
- (6) 军事设备
- (7) 其他与上述设备有同等品质与可靠性要求的设备

注释1：仅限于对航空设备的安全运行不产生直接干扰的设备 [ 机内娱乐设备、机内照明设备、电动座椅、餐饮设备等 ]，在满足敝公司另行指定的相关条件时，亦可将敝公司产品用于以上用途。在贵公司考虑将敝公司的产品用于以上用途时，请务必事先向敝公司咨询相关的信息。

注释2：包括注入人体内的部分和与此相连接的体外部分。

## 4. 责任的限制

未经敝公司的事先书面同意，把本产品目录中所记载的产品使用于非敝公司预设用途的设备、前述需要向敝公司咨询的设备或敝公司禁止使用的设备，从而给客户或第三方造成损害的，敝公司不承担任何责任，敬请知悉。

### ■ 安全设计

需将敝公司的产品使用于对安全性和可靠性要求较高的设备、电路上时，请进行充分的安全性评估和可靠性评估。另外，请通过设置保护电路、保护装置的系统，设置冗余电路不会被单一故障影响安全性的系统等失效导向安全（fail-safe）设计，确保充分的安全性。

### ■ 有关知识产权

本产品目录中所记载的信息是用于说明相关产品的典型操作以及相关应用。此类信息的使用不代表对于敝公司以及第三方的知识产权以及其他权利的使用许可或是不侵权保证。

### ■ 保证范围

敝公司产品的保证范围仅限于符合交货规格说明书中所记载的产品规格且已经交付的敝公司产品本身，由敝公司产品的故障或不良情况所诱发的损害，敝公司不承担任何责任，敬请知悉。但是，仅限于敝公司的产品作为通用性，标准性用途使用于本产品目录或是交货规格说明书中另行注明的设备，且以书面形式另行签署了交易基本合同书，品质保证协定时，敝公司将根据该合同等的条件提供保证。

### ■ 正规销售渠道

本产品目录中所记载的内容适用于从敝公司营业所、销售子公司、销售代理店（即“正规销售渠道”）购买的敝公司产品，并不适用于从其他渠道购买的敝公司产品，敬请知悉。

### ■ 出口时的注意事项

本产品目录中所记载的部分产品在出口时须事先确认《外汇和对外贸易法》以及美国在出口管理方面的相关法规，并办理相关手续。如有不明之处，请向敝公司咨询。

▶ 由于篇幅有限，本产品目录中只记载了有代表性的产品规格，若考虑使用敝公司产品时，请确认交货规格说明书中的详细规格。另外，有关各产品的详细信息（特性图、可靠性信息、使用时的注意事项等），请参阅敝公司网站 (<http://www.ty-top.com/>)。

# 车载用途使用指引

敕公司将汽车用电子设备划分为如下四个分类。而对于敕公司的每个产品，敕公司都设定了其可以被使用的分类，以及相对应的产品系列（左起第二位的产品型号的记号为“A”或是“C”）。因此，需在汽车用电子设备上使用敕公司的产品之前，请务必事先确认该产品系列是否适合使用该用途上。如有不明之处，请与敕公司取得联系。

| 产品系列<br>(左起第二位的产品型号的记号) | 分类  | 汽车用电子设备（代表实例）   |
|-------------------------|-----|---|
| A                       | 控制系 | <ul style="list-style-type: none"> <li>• 发动机引擎控制装置（ECU）</li> <li>• 巡航定速控制装置</li> <li>• 四轮转向系统（4WS）</li> <li>• 自动变速箱（AT）</li> <li>• 动力转向装置</li> <li>• HEV/PHV/EV 基础控制（电池 / 逆变器 / DC-DC）</li> <li>• 汽车定位器（车辆位置情报提供装置） 等</li> </ul>  |
|                         | 安全系 | <ul style="list-style-type: none"> <li>• 防锁死刹车系统（ABS）</li> <li>• 车身动态稳定系统（ESC）</li> <li>• 安全气囊</li> <li>• ADAS（直接控制走动 / 转向 / 停车的装置） 等</li> </ul>  |
| C                       | 车身系 | <ul style="list-style-type: none"> <li>• 雨刷</li> <li>• 自动门锁</li> <li>• 电动车窗</li> <li>• 无钥匙进入系统（智能钥匙）</li> <li>• 电动后视镜</li> <li>• 汽车电子后视镜</li> <li>• 车内照明</li> <li>• 车内空调系统</li> <li>• 轮胎压力监测系统（TPMS）</li> <li>• 防盗装置</li> <li>• ADAS（与传感，安全 / 传动系统没有关联的装置） 等</li> </ul> |
|                         | 情报系 | <ul style="list-style-type: none"> <li>• 车载信息娱乐装置（汽车导航 / 音响等）</li> <li>• 情报通讯装置（ITS/T-BOX）</li> <li>• 汽车仪表盘</li> <li>• 行车记录仪（车厂原装配件） 等</li> </ul>   |

▶ 由于篇幅有限，本产品目录中只记载了有代表性的产品规格，若考虑使用敕公司产品时，请确认交货规格说明书中的详细规格。  
另外，有关各产品的详细信息(特性图、可靠性信息、使用时的注意事项等)，请参阅敕公司网站(<http://www.ty-top.com/>)。

# 车载(车身系 / 情报系)用途 绕线型金属系功率电感器 MCOIL™ LCEN 系列

系列前的记号来自型号, 用来区分产品的种类和特性等。

AEC-Q200 Grade 2 (已完成 Grade 2 条件下的评价测试。)

\*使用环境温度: -40~105°C

回流焊

AEC-Q200

## ■ 型号标示法

\*使用温度范围: -40~+125°C (包含产品本身发热)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | C | E | N | A | 2 | 5 | 2 | 0 | M | K | T | 1 | R | 0 | M |  |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |   |   |   |   |   |   |   |   |  |

## ① 系列

|                    |                             |
|--------------------|-----------------------------|
| 代码<br>(1)(2)(3)(4) |                             |
| LCEN               | 车载(车身系 / 情报系)用途 绕线型金属系功率电感器 |

## (1) 产品群

|    |     |
|----|-----|
| 代码 |     |
| L  | 电感器 |

## (3) 类型

|    |             |
|----|-------------|
| 代码 |             |
| E  | 绕线型金属系 高充填型 |

## (2) 范畴

|    |                    |      |
|----|--------------------|------|
| 代码 | 推荐设备               | 品质等级 |
| C  | 汽车用电子设备(控制系 / 安全系) | 2    |

## (4) 特效 / 特性

|    |        |
|----|--------|
| 代码 |        |
| N  | 一般功率扼流 |

## ② 特征

|    |              |
|----|--------------|
| 代码 | 特征           |
| A  | 5面电极(树脂银×镀锡) |

## ⑤ 包装

|    |      |
|----|------|
| 代码 | 包装   |
| T  | 卷盘带装 |

## ③ 尺寸(L×W)

|      |              |
|------|--------------|
| 代码   | 尺寸(L×W) [mm] |
| 2016 | 2.0×1.6      |
| 2520 | 2.5×2.0      |

## ⑥ 标称电感值

|       |            |
|-------|------------|
| 代码(例) | 标称电感值 [μH] |
| R47   | 0.47       |
| 1R0   | 1.0        |
| 4R7   | 4.7        |

※R=小数点

## ④ 尺寸(T)


|    |            |
|----|------------|
| 代码 | 尺寸(T) [mm] |
| MK | 1.2        |

## ⑦ 电感量公差


|    |       |
|----|-------|
| 代码 | 电感量公差 |
| M  | ±20%  |

## ⑧ 管理记号

## ■ 标准外型尺寸 / 标准数量

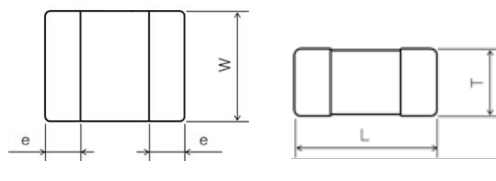推荐焊盘图案  
实装上的注意

- 请确认实装状态后使用。
- 本产品焊法限定为回流焊法。



| Type | A    | B   | C   |
|------|------|-----|-----|
| 2016 | 0.8  | 0.8 | 1.8 |
| 2520 | 0.85 | 1.2 | 2.2 |

单位: mm

| Type   | L                        | W                        | T                      | e                        | 标准数量 [pcs]<br>卷盘带装 |
|--------|--------------------------|--------------------------|------------------------|--------------------------|--------------------|
| 2016MK | 2.0±0.2<br>(0.079±0.008) | 1.6±0.2<br>(0.063±0.008) | 1.2 max<br>(0.047 max) | 0.5±0.2<br>(0.020±0.008) | 3000               |
| 2520MK | 2.5±0.2<br>(0.098±0.008) | 2.0±0.2<br>(0.079±0.008) | 1.2 max<br>(0.047 max) | 0.6±0.3<br>(0.024±0.012) | 3000               |

单位: mm (inch)

由于篇幅有限, 本产品目录中只记载了有代表性的产品规格, 若考虑使用敝公司产品时, 请确认交货规格说明书中的详细规格。  
另外, 有关各产品的详细信息(特性图、可靠性信息、使用时的注意事项等), 请参阅敝公司网站 (<http://www.ty-top.com/>)。

■ PART NUMBER

• All the Wire-wound Metal Power Inductors of the catalog lineup are RoHS compliant.

Notes)

- The exchange of individual specifications is necessary depending on your application and/or circuit condition. Please contact TAIYO YUDEN's official sales channel.
- For Automotive (AEC-Q200 Qualified) products for BODY & CHASSIS, and INFOTAINMENT. Please check "Automotive Application Guide" for further details before using the products.

< AEC-Q200 :AEC-Q200 qualified>

All the Wire-wound Metal Power Inductors for Automotive products are tested based on the test conditions and methods defined in AEC-Q200 by family item.

Please consult with TAIYO YUDEN's official sales channel for the details of the product specifications and AEC-Q200 test results, etc.,

and please review and approve the product specifications before ordering.

● 2016MK type [Thickness: 1.2mm max.]

| New part number     | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA] (max.) |                                |                                | Measuring frequency [MHz] |
|---------------------|---------------------------------|-------------------------------|----------------------|--------------------------------------|-----------------------------------|------------------------------|--------------------------------|--------------------------------|---------------------------|
|                     |                                 |                               |                      |                                      |                                   | Saturation current Idc1      | Temperature rise current① Idc2 | Temperature rise current② Idc2 |                           |
| LCENA2016MKTR24M0NK | MEMK2016TR24MGNKV               | 0.24                          | ±20%                 | -                                    | 0.018                             | 6,800                        | 3,500                          | 5,500                          | 1                         |
| LCENA2016MKTR33M0NK | MEMK2016TR33MGNKV               | 0.33                          | ±20%                 | -                                    | 0.022                             | 5,400                        | 3,000                          | 4,900                          | 1                         |
| LCENA2016MKTR47M0NK | MEMK2016TR47MGNKV               | 0.47                          | ±20%                 | -                                    | 0.025                             | 4,800                        | 2,900                          | 4,700                          | 1                         |
| LCENA2016MKT1R0M0NK | MEMK2016T1R0MGNKV               | 1.0                           | ±20%                 | -                                    | 0.045                             | 3,100                        | 2,000                          | 3,200                          | 1                         |
| LCENA2016MKT2R2M0NK | MEMK2016T2R2MGNKV               | 2.2                           | ±20%                 | -                                    | 0.120                             | 2,200                        | 1,100                          | 1,800                          | 1                         |

● 2520MK type [Thickness: 1.2mm max.]

| New part number     | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | Self-resonant frequency [MHz] (min.) | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA] (max.) |                                |                                | Measuring frequency [MHz] |
|---------------------|---------------------------------|-------------------------------|----------------------|--------------------------------------|-----------------------------------|------------------------------|--------------------------------|--------------------------------|---------------------------|
|                     |                                 |                               |                      |                                      |                                   | Saturation current Idc1      | Temperature rise current① Idc2 | Temperature rise current② Idc2 |                           |
| LCENA2520MKTR15M0NK | MEMK2520TR15MGNKV               | 0.15                          | ±20%                 | -                                    | 0.009                             | 10,200                       | 4,900                          | 6,700                          | 1                         |
| LCENA2520MKTR33M0NK | MEMK2520TR33MGNKV               | 0.33                          | ±20%                 | -                                    | 0.015                             | 7,000                        | 4,000                          | 5,600                          | 1                         |
| LCENA2520MKTR47M0NK | MEMK2520TR47MGNKV               | 0.47                          | ±20%                 | -                                    | 0.020                             | 5,900                        | 3,700                          | 5,000                          | 1                         |
| LCENA2520MKT1R0M0NK | MEMK2520T1R0MGNKV               | 1.0                           | ±20%                 | -                                    | 0.042                             | 4,400                        | 2,400                          | 3,200                          | 1                         |
| LCENA2520MKT1R5M0NK | MEMK2520T1R5MGNKV               | 1.5                           | ±20%                 | -                                    | 0.057                             | 3,300                        | 2,100                          | 2,800                          | 1                         |
| LCENA2520MKT2R2M0NK | MEMK2520T2R2MGNKV               | 2.2                           | ±20%                 | -                                    | 0.077                             | 3,000                        | 1,700                          | 2,400                          | 1                         |
| LCENA2520MKT3R3M0NK | MEMK2520T3R3MGNKV               | 3.3                           | ±20%                 | -                                    | 0.131                             | 2,300                        | 1,300                          | 1,800                          | 1                         |
| LCENA2520MKT4R7M0NK | MEMK2520T4R7MGNKV               | 4.7                           | ±20%                 | -                                    | 0.185                             | 2,100                        | 1,100                          | 1,500                          | 1                         |

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※) The temperature rise current value (Idc2)① is the DC current value having temperature increase up to 20°C. (at 20°C)

※) The temperature rise current value (Idc2)② is the DC current value having temperature increase up to 40°C. (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

※) Idc2 Measurement board data

Material:FR4

Board dimensions: 100 × 50 × 1.6t mm

Pattern dimensions: 43 × 59.2 mm


Pattern thickness: 50  $\mu$ m

■ Derating of Rated Current

● LCEN series

Derating of current is necessary for LCEN series depending on ambient temperature.

Please refer to the chart shown below for appropriate derating of current.

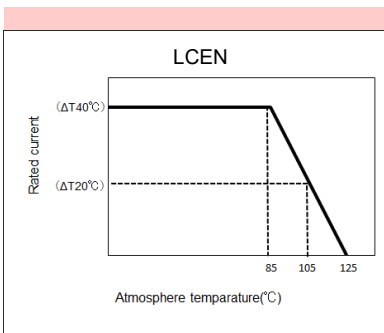

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# Wire-wound Metal Power Inductors MCOIL™ LSEN/LLEN/LCEN/LBEN/LMEN series

# Wire-wound Metal Power Inductors MCOIL™ LSEP/LLEP series

# Wire-wound Metal Power Inductors MCOIL™ LSEU/LLEU series


## PACKAGING

### ① Minimum Quantity

| Type   | Standard Quantity [pcs] |
|--------|-------------------------|
|        | Tape & Reel             |
| 2012HK | 3000                    |
| 2012KK | 3000                    |
| 2016MK | 3000                    |
| 2016HK | 3000                    |
| 2016KK | 3000                    |
| 2520KK | 3000                    |
| 2520MK | 3000                    |
| 3225HK | 3000                    |


### ② Tape Material

#### ● Embossed Tape

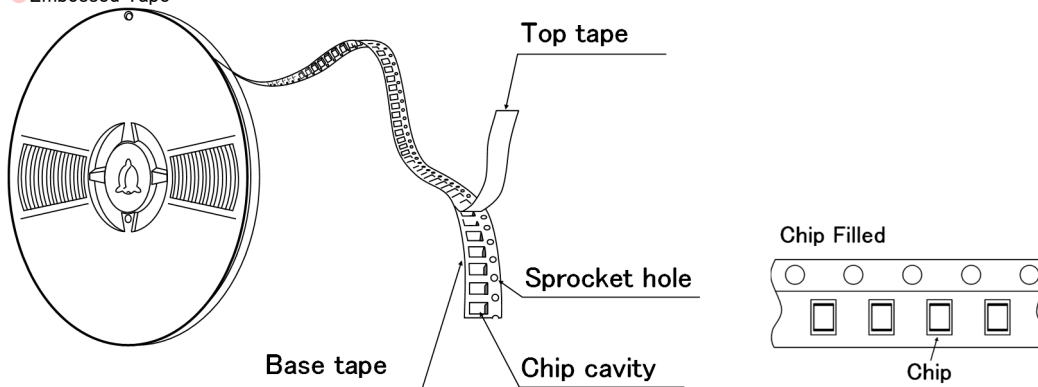

### ③ Taping dimensions

#### ● Embossed tape 8mm wide (0.315 inches wide)

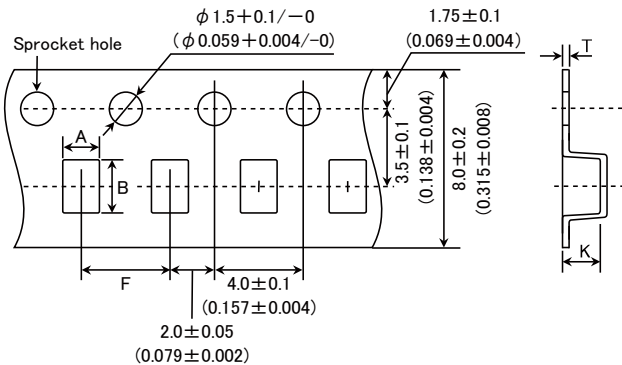


| Type   | Chip cavity                   |                               | Insertion pitch              | Tape thickness                 |   |
|--------|-------------------------------|-------------------------------|------------------------------|--------------------------------|---|
|        | A                             | B                             | F                            | T                              | K   |
| 2012HK | 1.45 ± 0.1<br>(0.057 ± 0.004) | 2.25 ± 0.1<br>(0.089 ± 0.004) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 0.25 ± 0.05<br>(0.009 ± 0.002) | 0.9 + 0.15 / -0.1<br>(0.035 + 0.006 / -0.004) |
| 2012KK | 1.45 ± 0.1<br>(0.057 ± 0.004) | 2.25 ± 0.1<br>(0.089 ± 0.004) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 0.25 ± 0.05<br>(0.009 ± 0.002) | 1.1 ± 0.1<br>(0.043 ± 0.004)                  |
| 2016MK | 1.9 ± 0.1<br>(0.075 ± 0.004)  | 2.45 ± 0.1<br>(0.097 ± 0.004) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 0.25 ± 0.05<br>(0.009 ± 0.002) | 1.4 ± 0.1<br>(0.055 ± 0.004)                  |
| 2016HK | 1.9 ± 0.1<br>(0.075 ± 0.004)  | 2.45 ± 0.1<br>(0.097 ± 0.004) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 0.25 ± 0.05<br>(0.009 ± 0.002) | 1.2 ± 0.1<br>(0.047 ± 0.004)                  |
| 2016KK | 1.9 ± 0.1<br>(0.075 ± 0.004)  | 2.45 ± 0.1<br>(0.097 ± 0.004) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 0.25 ± 0.05<br>(0.009 ± 0.002) | 1.2 ± 0.1<br>(0.047 ± 0.004)                  |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


| Type   | Chip cavity              |                          | Insertion pitch          | Tape thickness             |                          |
|--------|--------------------------|--------------------------|--------------------------|----------------------------|--------------------------|
|        | A                        | B                        |                          | T                          | K                        |
| 2520KK | 2.4±0.1<br>(0.094±0.004) | 2.9±0.1<br>(0.114±0.004) | 4.0±0.1<br>(0.157±0.004) | 0.25±0.05<br>(0.009±0.002) | 1.1±0.1<br>(0.043±0.004) |
| 2520MK | 2.4±0.1<br>(0.094±0.004) | 2.9±0.1<br>(0.114±0.004) | 4.0±0.1<br>(0.157±0.004) | 0.25±0.05<br>(0.009±0.002) | 1.4±0.1<br>(0.055±0.004) |
| 3225HK | 2.8±0.1<br>(0.110±0.004) | 3.5±0.1<br>(0.138±0.004) | 4.0±0.1<br>(0.157±0.004) | 0.25±0.05<br>(0.009±0.002) | 1.1±0.1<br>(0.043±0.004) |

Unit: mm (inch)

#### ④ Leader and Blank portion

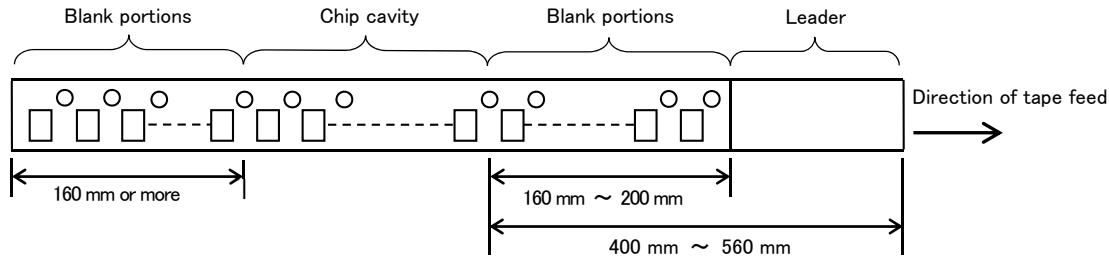

#### ⑤ Reel size

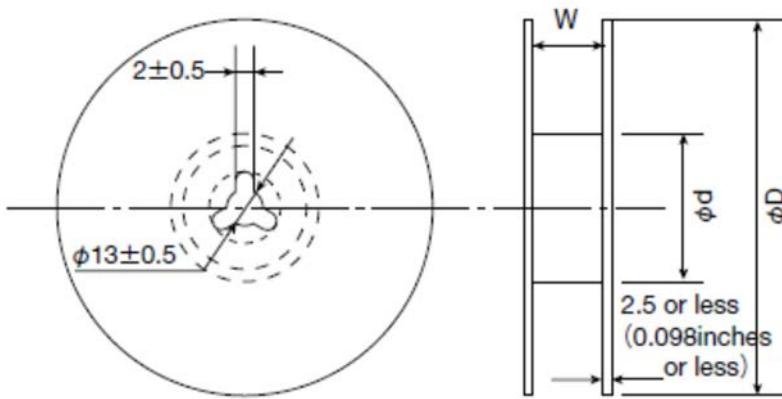


| Type   | Reel size (Reference values) |                           |                           |
|--------|------------------------------|---------------------------|---------------------------|
|        | $\phi D$                     | $\phi d$                  | W                         |
| 2012HK | 180+0/-3<br>(7.087+0/-0.118) | 60+1/-0<br>(2.36+0.039/0) | 10.0±1.5<br>(0.394±0.059) |
| 2012KK |                              |                           |                           |
| 2016MK |                              |                           |                           |
| 2016HK |                              |                           |                           |
| 2016KK |                              |                           |                           |
| 2520KK |                              |                           |                           |
| 2520MK |                              |                           |                           |
| 3225HK |                              |                           |                           |

Unit: mm (inch)

#### ⑥ Top Tape Strength

The top The top tape requires a peel-off force of 0.1 to 1.0N in the direction of the arrow as illustrated below.

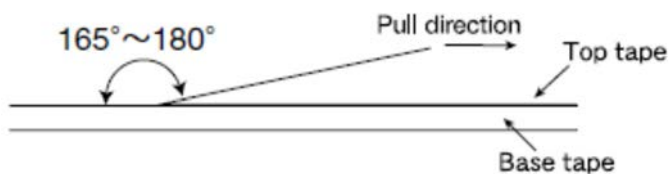

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# Wire-wound Metal Power Inductors MCOIL™ LCEN series for Automotive Body & Chassis and Infotainment

## RELIABILITY DATA

### 1. Operating Temperature Range

|                          |  |
|--------------------------|--|
| Specified Value          | -40~+125°C (Including self-generated heat) |
| Test Methods and Remarks | Including self-generated heat              |

### 2. Storage Temperature Range

|                          |  |
|--------------------------|--|
| Specified Value          | -40~+85°C                              |
| Test Methods and Remarks | 0 to 40°C for the product with taping. |

### 3. Rated current

|                 |                                |
|-----------------|--------------------------------|
| Specified Value | Within the specified tolerance |
|-----------------|--------------------------------|

### 4. Inductance

|                          |  |
|--------------------------|--|
| Specified Value          | Within the specified tolerance   |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4294A or equivalent)<br>Measuring frequency : 1MHz, 0.5V |

### 5. DC Resistance

|                          |  |
|--------------------------|--|
| Specified Value          | Within the specified tolerance                               |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) |

### 6. High Temperature Exposure (Storage)

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours at 125 deg C<br>Unpowered  |

### 7. Temperature Cycling

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$                                       |
| Test Methods and Remarks | 1000 cycles (-40 deg C to +125 deg C)<br>30 min. maximum dwell time at each temperature extreme.<br>1 min. maximum transition time. |

### 8. Biased Humidity

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours, 85 deg C/85% RH.<br>Unpowered   |

### 9. Operational Life

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours, 105 deg C<br>Rated current  |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).



### 10. Resistance to Solvents

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.  |
| Test Methods and Remarks | ① Soak a test sample in isopropyl alcohol (IPA) at $25 \pm 5$ deg C for 3 to 3.5 minutes.<br>② Take the test sample out and brush 10 times using a brush soaked in IPA.<br>③ Repeat ① and ② twice more. |

### 11. Mechanical Shock

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks | Apply 3 shocks in each direction along 3 mutually perpendicular axes of the test specimen (18 shocks in total).<br>Peak value: 100g<br>Duration: 6ms<br>Test pulse: Half-sine<br>Velocity change: 3.7m/s. |

### 12. Vibration

|                          |  |
|--------------------------|--|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$        |
| Test Methods and Remarks | 5g's for 20 min., 12 cycles each of 3 orientations (36 cycles in total)<br>Test from: 10 Hz to 2000 Hz |

### 13. Resistance to Soldering Heat (Reflow)

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks | Reflow peak temperature: $250+0/-5$ deg C<br>Duration time: 30 sec.<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |


### 14. ESD

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$ |
| Test Methods and Remarks | Per AEC-Q200-002  |

### 15. Solderability


|                          |  |
|--------------------------|--|
| Specified Value          | More than 90% of terminal electrode shall be covered with fresh solder.  |
| Test Methods and Remarks | Per J-STD-002<br>a) Method B Solder at $235 \pm 5$ deg C for 5 sec.<br>c) Method D Solder at $260 \pm 5$ deg C for 30 sec. |

### 16. Board Flex
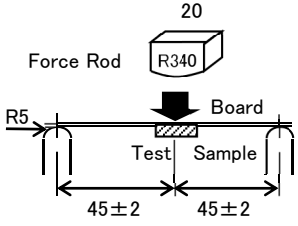
|                          |  |
|--------------------------|--|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$  |
| Test Methods and Remarks | Solder the test samples to the test boards by the reflow soldering.<br>Apply a force in a downward direction until amount of deflection reaches 2mm.<br>The 2-mm deflection shall be held for 60 sec.<br>Test board dimensions: 100mm × 40mm × 1.6mm.<br> |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

17. Terminal Strength (SMD)
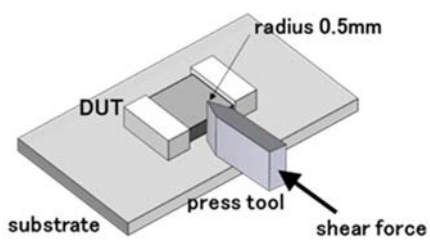
|                          |   |
|--------------------------|---|
| Specified Value          | Appearance :No significant abnormality in appearance.   |
| Test Methods and Remarks | Apply a force of 17.7N for 60±5 sec.<br> |

18. Standard condition

|                 |   |
|-----------------|---|
| Specified Value | Standard test condition :<br>Unless otherwise specified, temperature is 20±15°C and 65±20%of relative humidity.<br>When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of 20±2°C of temperature, 65±5% relative humidity.<br>Inductance is in accordance with our measured value. |
|-----------------|---|

# Wire-wound Metal Power Inductors MCOIL™ LSEN/LLEN/LCEN/LBEN/LMEN series

# Wire-wound Metal Power Inductors MCOIL™ LSEP/LLEP series

# Wire-wound Metal Power Inductors MCOIL™ LSEU/LLEU series

## ■ PRECAUTIONS

| 1. Circuit Design                         |  |
|---|--|
| Precautions                               | <ul style="list-style-type: none"> <li>◆ Verification of operating environment, electrical rating and performance                             <ol style="list-style-type: none"> <li>1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.</li> <li>2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.</li> </ol> </li> <li>◆ Operating Current (Verification of Rated current)                             <ol style="list-style-type: none"> <li>1. The operating current including inrush current for inductors must always be lower than their rated values.</li> <li>2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.</li> </ol> </li> <li>◆ Temperature rise                             <p>Temperature rise of power choke coil depends on the installation condition in end products.</p> <p>Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> </li> </ul> |
| 2. PCB Design                             |  |
| Precautions                               | <ul style="list-style-type: none"> <li>◆ Land pattern design                             <ol style="list-style-type: none"> <li>1. Please refer to a recommended land pattern.</li> </ol> </li> </ul>  |
| Technical considerations                  | <ul style="list-style-type: none"> <li>◆ Land pattern design                             <p>Surface Mounting</p> <ul style="list-style-type: none"> <li>• Mounting and soldering conditions should be checked beforehand.</li> <li>• Applicable soldering process to this products is reflow soldering only.</li> </ul> </li> </ul>  |
| 3. Considerations for automatic placement |  |
| Precautions                               | <ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine                             <ol style="list-style-type: none"> <li>1. Excessive impact load should not be imposed on the products when mounting onto the PC boards.</li> <li>2. Mounting and soldering conditions should be checked beforehand.</li> </ol> </li> </ul>   |
| Technical considerations                  | <ul style="list-style-type: none"> <li>◆ Adjustment of mounting machine                             <ol style="list-style-type: none"> <li>1. When installing products, care should be taken not to apply distortion stress as it may deform the products.</li> </ol> </li> </ul>  |
| 4. Soldering                              |  |
| Precautions                               | <ul style="list-style-type: none"> <li>◆ Reflow soldering                             <ol style="list-style-type: none"> <li>1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>2. The product shall be used reflow soldering only.</li> <li>3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> </ol> </li> <li>◆ Lead free soldering                             <ol style="list-style-type: none"> <li>1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> </ol> </li> </ul>   |
| Technical considerations                  | <ul style="list-style-type: none"> <li>◆ Reflow soldering                             <ol style="list-style-type: none"> <li>1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ol> <p>Recommended reflow condition (Pb free solder)</p> </li> </ul>  |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

| 5. Cleaning              |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Cleaning conditions               <ol style="list-style-type: none"> <li>1. Washing by supersonic waves shall be avoided.</li> </ol> </li> </ul>  |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Cleaning conditions               <ol style="list-style-type: none"> <li>1. If washed by supersonic waves, the products might be broken.</li> </ol> </li> </ul>   |
| 6. Handling              |  |
| Precautions              | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. Keep the product away from all magnets and magnetic objects.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> <li>2. Please do not add any shock and power to a product in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. Please avoid accumulation of a packing box as much as possible.</li> </ol> </li> </ul> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. There is a case that a characteristic varies with magnetic influence.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. There is a case to be damaged by a mechanical shock.</li> <li>2. There is a case to be broken by the handling in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Damage and a characteristic can vary with an excessive shock or stress.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.</li> </ol> </li> </ul>   |
| 7. Storage conditions    |  |
| Precautions              | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.                   <ul style="list-style-type: none"> <li>▪ Storage conditions                       <ul style="list-style-type: none"> <li>Ambient temperature : 0~40°C</li> <li>Humidity : Below 70% RH</li> </ul> </li> <li>▪ The recommended ambient temperature is below 30°C. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes.                           <ul style="list-style-type: none"> <li>For this reason, product should be used within 6 months from the time of delivery.</li> <li>In case of storage over 6 months, solderability shall be checked before actual usage.</li> </ul> </li> </ul> </li> </ol> </li> </ul>   |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</li> </ol> </li> </ul>   |

# 车载(车身系 / 情报系)用途 多层金属系功率电感器 MCOIL™ LCCN 系列

系列前的记号来自型号, 用来区分产品的种类和特性等。

回流焊

AEC-Q200

\*使用温度范围: -40~+125°C (包含产品本身发热)

\*使用温度范围: -55~+150°C (包含产品本身发热)

## ■ 型号标示法

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | C | G | N | F | 2 | 0 | 1 | 2 | K | K | T | 1 | R | 0 | M | A |  |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ |   |   |   |   |   |   |   |   |   |  |

## ① 系列

|                       |                            |
|-----------------------|----------------------------|
| 代码<br>(1) (2) (3) (4) |                            |
| LCCN                  | 车载(车身系 / 情报系)用途 多层金属系功率电感器 |

## (1) 产品群

|    |     |
|----|-----|
| 代码 |     |
| L  | 电感器 |

## (3) 类型

|    |       |
|----|-------|
| 代码 |       |
| C  | 多层金属系 |

## (2) 范畴

|    |                    |      |
|----|--------------------|------|
| 代码 | 推荐设备               | 品质等级 |
| C  | 汽车用电子设备(车身系 / 情报系) | 2    |

## (4) 特效 / 特性

|    |        |
|----|--------|
| 代码 |        |
| N  | 一般功率扼流 |

## ② 特征

|    |             |
|----|-------------|
| 代码 | 特征          |
| F  | 5面电极、极性表示产品 |

## ⑤ 包装

|    |      |
|----|------|
| 代码 | 包装   |
| T  | 卷盘带装 |

## ③ 尺寸 (L×W)

|      |             |               |
|------|-------------|---------------|
| 代码   | 外型 (inch)   | 尺寸 (L×W) [mm] |
| 1608 | 1608 (0603) | 1.6×0.8       |
| 2012 | 2012 (0805) | 2.0×1.25      |

## ⑥ 标称电感值

|        |                  |
|--------|------------------|
| 记号 (例) | 标称电感值 [ $\mu$ H] |
| R24    | 0.24             |
| R47    | 0.47             |
| 1R0    | 1.0              |

※R=小数点

## ④ 产品厚度


|    |           |
|----|-----------|
| 代码 | 产品厚度 [mm] |
| KK | 1.0 max   |

## ⑦ 电感量公差

|    |       |
|----|-------|
| 代码 | 电感量公差 |
| M  | ±20%  |

## ⑧ 管理记号

## ■ 标准外型尺寸 / 标准数量



| Type             | L                        | W                         | T                      | e                        | 标准数量 [pcs] |      |
|------------------|--------------------------|---------------------------|------------------------|--------------------------|------------|------|
|                  |                          |                           |                        |                          | 纸带         | 压模带  |
| 1608KK<br>(0603) | 1.6±0.2<br>(0.063±0.008) | 0.8±0.2<br>(0.031±0.008)  | 1.0 max<br>(0.039 max) | 0.3±0.2<br>(0.012±0.008) | -          | 3000 |
| 2012KK<br>(0805) | 2.0±0.2<br>(0.079±0.008) | 1.25±0.2<br>(0.049±0.008) | 1.0 max<br>(0.039 max) | 0.5±0.3<br>(0.02±0.012)  | -          | 3000 |

单位: mm (inch)

▶ 由于篇幅有限, 本产品目录中只记载了有代表性的产品规格, 若考虑使用敝公司产品时, 请确认交货规格说明书中的详细规格。  
另外, 有关各产品的详细信息(特性图、可靠性信息、使用时的注意事项等), 请参阅敝公司网站 (<http://www.ty-top.com/>)。

■ PART NUMBER

• All the Multilayer Metal Power Inductors of the catalog lineup are RoHS compliant.

Notes)

- The exchange of individual specifications is necessary depending on your application and/or circuit condition. Please contact TAIYO YUDEN's official sales channel.
- For Automotive (AEC-Q200 Qualified) products for BODY & CHASSIS, and INFOTAINMENT. Please check "Automotive Application Guide" for further details before using the products.  
 < AEC-Q200 :AEC-Q200 qualified >  
 All the Multilayer Metal Power Inductors for Automotive products are tested based on the test conditions and methods defined in AEC-Q200 by family item.  
 Please consult with TAIYO YUDEN's official sales channel for the details of the product specifications and AEC-Q200 test results, etc.,  
 and please review and approve the product specifications before ordering.

● 1608 type

| New part number   | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | DC Resistance<br>[mΩ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|-------------------|------------------------------------|------|----------------------------|----------------------|-----------------------|--------|--|--|------------------------------|--------------------------|
|                   |                                    |      |                            |                      | (max.)                | (typ.) |  |  |                              |                          |
| LCCNF1608KKTR24MA | MCKK1608TR24MVC                    | RoHS | 0.24                       | ±20%                 | 35                    | 29     | 3.2  | 3.8  | 1                            | 1.00                     |
| LCCNF1608KKTR33MA | MCKK1608TR33MVC                    | RoHS | 0.33                       | ±20%                 | 46                    | 38     | 2.8  | 3.3  | 1                            | 1.00                     |
| LCCNF1608KKTR47MA | MCKK1608TR47MVC                    | RoHS | 0.47                       | ±20%                 | 65                    | 54     | 2.6  | 3.0  | 1                            | 1.00                     |

● 1608 type \* Operating Temp.: -55~+150°C(Including self-generated heat)

| New part number+A2A24:K2 | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | DC Resistance<br>[mΩ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|--------------------------|------------------------------------|------|----------------------------|----------------------|-----------------------|--------|--|--|------------------------------|--------------------------|
|                          |                                    |      |                            |                      | (max.)                | (typ.) |  |  |                              |                          |
| LCCNF1608KKTR24MAD       | MCKK1608TR24MVC D                  | RoHS | 0.24                       | ±20%                 | 35                    | 29     | 3.2  | 3.8  | 1                            | 1.00                     |
| LCCNF1608KKTR33MAD       | MCKK1608TR33MVC D                  | RoHS | 0.33                       | ±20%                 | 46                    | 38     | 2.8  | 3.3  | 1                            | 1.00                     |
| LCCNF1608KKTR47MAD       | MCKK1608TR47MVC D                  | RoHS | 0.47                       | ±20%                 | 65                    | 54     | 2.6  | 3.0  | 1                            | 1.00                     |

● 2012 type

| New part number   | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | DC Resistance<br>[mΩ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|-------------------|------------------------------------|------|----------------------------|----------------------|-----------------------|--------|--|--|------------------------------|--------------------------|
|                   |                                    |      |                            |                      | (max.)                | (typ.) |  |  |                              |                          |
| LCCNF2012KKTR24MA | MCKK2012TR24MVC                    | RoHS | 0.24                       | ±20%                 | 20                    | 17     | 4.8  | 5.4  | 1                            | 1.00                     |
| LCCNF2012KKTR33MA | MCKK2012TR33MVC                    | RoHS | 0.33                       | ±20%                 | 30                    | 25     | 4.4  | 4.5  | 1                            | 1.00                     |
| LCCNF2012KKTR47MA | MCKK2012TR47MVC                    | RoHS | 0.47                       | ±20%                 | 41                    | 34     | 3.8  | 3.8  | 1                            | 1.00                     |
| LCCNF2012KKT1R0MA | MCKK2012T1R0MVC                    | RoHS | 1.0                        | ±20%                 | 85                    | 71     | 2.7  | 2.7  | 1                            | 1.00                     |

● 2012 type \* Operating Temp.: -55~+150°C(Including self-generated heat)

| New part number    | Old part number<br>(for reference) | EHS  | Nominal inductance<br>[μH] | Inductance tolerance | DC Resistance<br>[mΩ] |        | Rated current(I <sub>dc1</sub> )<br>[A] (max.) | Rated current(I <sub>dc2</sub> )<br>[A] (max.) | Measuring frequency<br>[MHz] | Thickness<br>[mm] (max.) |
|--------------------|------------------------------------|------|----------------------------|----------------------|-----------------------|--------|--|--|------------------------------|--------------------------|
|                    |                                    |      |                            |                      | (max.)                | (typ.) |  |  |                              |                          |
| LCCNF2012KKTR24MAD | MCKK2012TR24MVC D                  | RoHS | 0.24                       | ±20%                 | 20                    | 17     | 4.8  | 5.4  | 1                            | 1.00                     |
| LCCNF2012KKTR33MAD | MCKK2012TR33MVC D                  | RoHS | 0.33                       | ±20%                 | 30                    | 25     | 4.4  | 4.5  | 1                            | 1.00                     |
| LCCNF2012KKTR47MAD | MCKK2012TR47MVC D                  | RoHS | 0.47                       | ±20%                 | 41                    | 34     | 3.8  | 3.8  | 1                            | 1.00                     |
| LCCNF2012KKT1R0MAD | MCKK2012T1R0MVC D                  | RoHS | 1.0                        | ±20%                 | 85                    | 71     | 2.7  | 2.7  | 1                            | 1.00                     |


※I<sub>dc1</sub> is the DC value at which the initial L value is decreased within 30% by the application of DC bias. (at 20°C)

※I<sub>dc2</sub> is the DC value at which the temperature of element is increased within 40°C by the application of DC bias. (at 20°C)

■ Derating of Rated Current

● LCCN series

Derating of current is necessary for LCCN series depending on ambient temperature.  
Please refer to the chart shown below for appropriate derating of current.

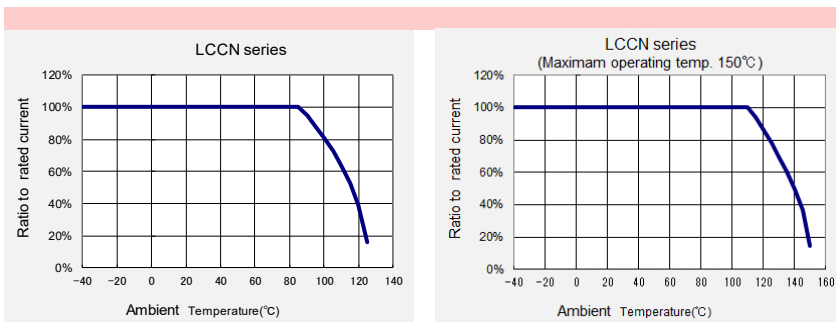

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# Multilayer Metal Power Inductors MCOIL™ LSCN/LCCN/LBCN/LLCN/LMCN series

## PACKAGING



### ① Minimum Quantity

#### ● Tape & Reel Packaging



| Type        | Thickness |                      | Standard Quantity [pcs] |               |
|-------------|-----------|----------------------|-------------------------|---------------|
|             | Code      | mm (inch)            | Paper Tape              | Embossed Tape |
| 1005 (0402) | EE        | 0.55 max (0.022 max) | 10000                   | —             |
| 1210 (0504) | EK        | 0.5 max (0.020 max)  | 5000                    | —             |
| 1412 (0505) | FE        | 0.65 max (0.026 max) | 4000                    | —             |
| 1608 (0603) | FK        | 0.6 max (0.024 max)  | 4000                    | —             |
| 1608 (0603) | FE        | 0.65 max (0.026 max) | 4000                    | —             |
| 1608 (0603) | HK        | 0.8 max (0.031 max)  | 4000                    | —             |
| 1608 (0603) | KK        | 1.0 max (0.039 max)  | —                       | 3000          |
| 2012 (0806) | HK        | 0.8 max (0.031 max)  | 4000                    | —             |
| 2012 (0805) | KK        | 1.0 max (0.039 max)  | —                       | 3000          |
| 2016 (0806) | FE        | 0.65 max (0.026 max) | 4000                    | —             |

### ② Taping material

#### ● Card board carrier tape 1005/1210/1412/1608/2012/2016 type

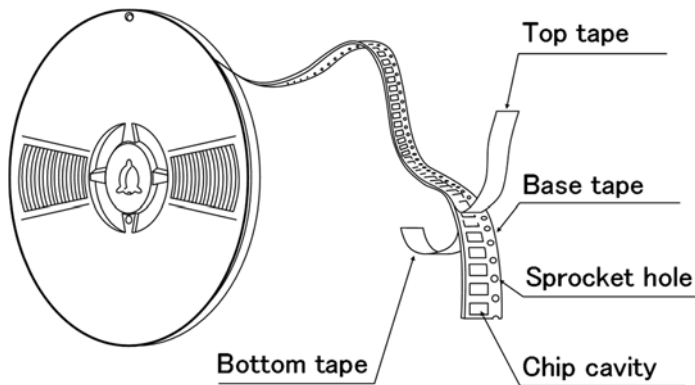


#### ● Embossed Tape 1608/2012 type

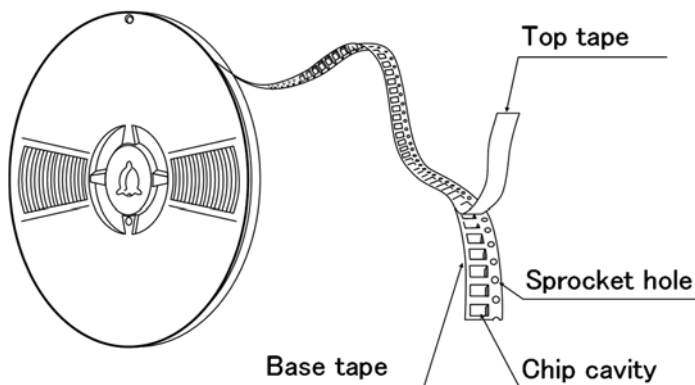

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

### ③ Taping Dimensions


#### ● Paper tape (8mm wide)

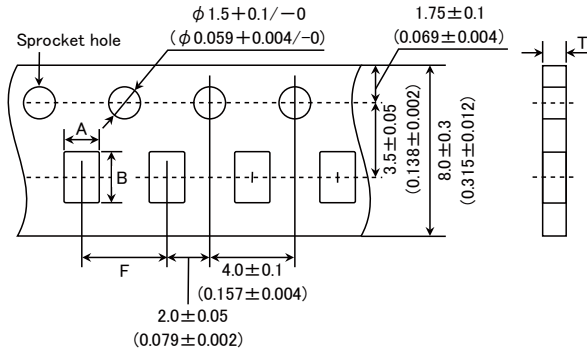

| Type        | Thickness |                         | Chip cavity     |                 | Insertion Pitch               | Tape Thickness          |  |
|-------------|-----------|-------------------------|-----------------|-----------------|-------------------------------|-------------------------|--|
|             | Code      | mm (inch)               | A               | B               | F                             | T                       |  |
| 1005 (0402) | EE        | 0.55 max<br>(0.021 max) | 0.8<br>(0.031)  | 1.3<br>(0.051)  | 2.0 ± 0.05<br>(0.079 ± 0.002) | 0.64 max<br>(0.025 max) |  |
| 1210 (0504) | EK        | 0.5 max<br>(0.020 max)  | 1.3<br>(0.051)  | 1.55<br>(0.061) | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.64 max<br>(0.025 max) |  |
| 1412 (0505) | FE        | 0.65 max<br>(0.026 max) | 1.6<br>(0.063)  | 1.8<br>(0.071)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.72 max<br>(0.028 max) |  |
| 1608 (0603) | FK        | 0.6 max<br>(0.024 max)  | 1.1<br>(0.043)  | 1.9<br>(0.075)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.72 max<br>(0.028 max) |  |
| 1608 (0603) | FE        | 0.65 max<br>(0.026 max) | 1.1<br>(0.043)  | 1.9<br>(0.075)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.72 max<br>(0.028 max) |  |
| 1608 (0603) | HK        | 0.8 max<br>(0.031 max)  | 1.2<br>(0.047)  | 2.0<br>(0.079)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.9 max<br>(0.035 max)  |  |
| 2012 (0805) | HK        | 0.8 max<br>(0.031 max)  | 1.65<br>(0.065) | 2.4<br>(0.094)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.9 max<br>(0.035 max)  |  |
| 2016 (0806) | FE        | 0.65 max<br>(0.026 max) | 1.95<br>(0.077) | 2.3<br>(0.091)  | 4.0 ± 0.1<br>(0.157 ± 0.004)  | 0.72 max<br>(0.028 max) |  |

Unit: mm (inch)

#### ● Embossed Tape (8mm wide)

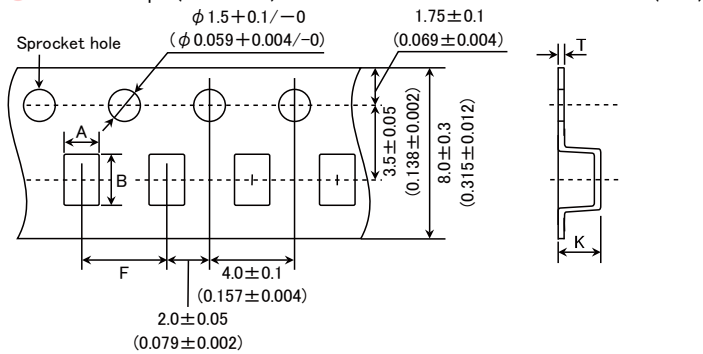


| Type        | Thickness |                        | Chip cavity     |                 | Insertion Pitch              | Tape Thickness         |                        |
|-------------|-----------|------------------------|-----------------|-----------------|------------------------------|------------------------|------------------------|
|             | Code      | mm (inch)              | A               | B               | F                            | K                      | T                      |
| 1608 (0603) | KK        | 1.0 max<br>(0.039 max) | 1.15<br>(0.045) | 1.95<br>(0.077) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 1.5 max<br>(0.059 max) | 0.3 max<br>(0.012 max) |
| 2012 (0805) | KK        | 1.0 max<br>(0.039 max) | 1.55<br>(0.061) | 2.35<br>(0.093) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 1.5 max<br>(0.059 max) | 0.3 max<br>(0.012 max) |

Unit: mm (inch)


▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).



#### ④ LEADER AND BLANK PORTION

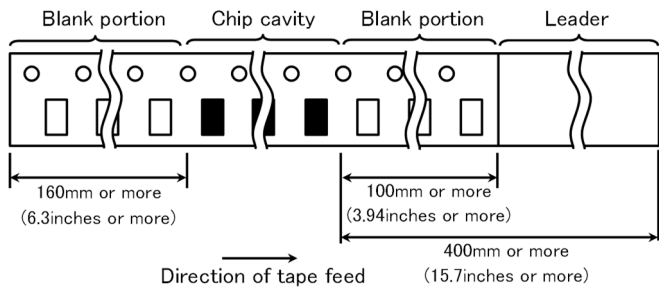

#### ⑤ Reel Size

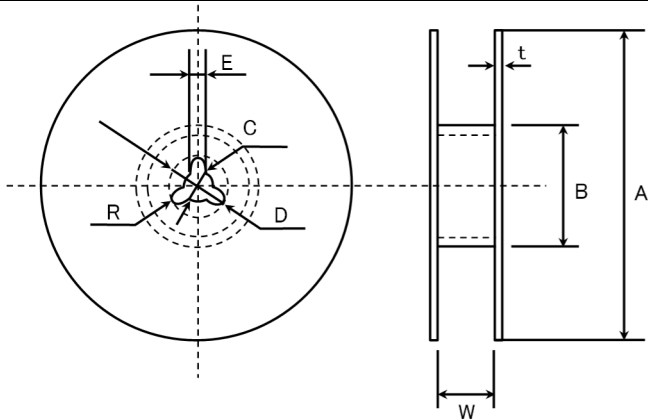


| A                  | B                 | C                   | D                   | E             | R   |
|--------------------|-------------------|---------------------|---------------------|---------------|-----|
| $\phi 178 \pm 2.0$ | $\phi 50$ or more | $\phi 13.0 \pm 0.2$ | $\phi 21.0 \pm 0.8$ | $2.0 \pm 0.5$ | 1.0 |

|                | t       | W            |
|----------------|---------|--------------|
| 4mm width tape | 1.5max. | $5 \pm 1.0$  |
| 8mm width tape | 2.5max. | $10 \pm 1.5$ |

(Unit : mm)

#### ⑥ Top tape strength

The top tape requires a peel-off force of 0.1 to 1.0N in the direction of the arrow as illustrated below.

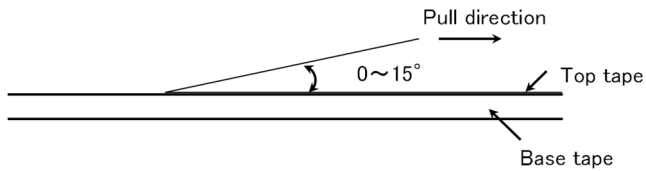

# Multilayer Metal Power Inductors MCOIL™ LCCN series for Automotive Body & Chassis and Infotainment

## RELIABILITY DATA

### 1. Operating Temperature Range

|                 |  |
|-----------------|--|
| Specified Value | -40~+125°C (Including self-generated heat) , End of part number "D" ⇒ -55~+150°C (Including self-generated heat) |
|-----------------|--|

### 2. Storage Temperature Range

|                 |   |
|-----------------|---|
| Specified Value | -40~+85°C , End of part number "D" ⇒ -55~+110°C |
|-----------------|---|

### 3. Rated Current

|                 |   |
|-----------------|---|
| Specified Value | Idc1: The decreasing-rate of inductance value is within 30 %<br>Idc2: The temperature of the element is increased within 40°C |
|-----------------|---|

### 4. Inductance

|                 |                              |
|-----------------|------------------------------|
| Specified Value | Refer to each specification. |
|-----------------|------------------------------|

|                          |   |
|--------------------------|---|
| Test Methods and Remarks | Measuring frequency : 1MHz<br>Measuring equipment : E4991 (or its equivalent) |
|--------------------------|---|

### 5. DC Resistance

|                 |                              |
|-----------------|------------------------------|
| Specified Value | Refer to each specification. |
|-----------------|------------------------------|

|                          |  |
|--------------------------|--|
| Test Methods and Remarks | Measuring equipment : HIOKI RM3545 (or its equivalent) |
|--------------------------|--|

### 6. High Temperature Exposure (Storage)

|                 |  |
|-----------------|--|
| Specified Value | Appearance: No abnormality<br>Inductance change: Within $\pm 10\%$ |
|-----------------|--|

|                          |   |
|--------------------------|---|
| Test Methods and Remarks | Temperature: Maximum operating temperature<br>Duration: 1000 hours at Unpowered<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |
|--------------------------|---|

### 7. Temperature Cycling

|                 |  |
|-----------------|--|
| Specified Value | Appearance: No abnormality<br>Inductance change: Within $\pm 10\%$ |
|-----------------|--|

|                          |  |
|--------------------------|--|
| Test Methods and Remarks | Temperature: Minimum operating temperature to Maximum operating temperature<br>Number of cycles: 1000 cycles<br>Maximum dwell time at each temperature extreme: 30 min<br>Maximum transition time: Within 1 min.<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |
|--------------------------|--|

### 8. Biased Humidity

|                 |  |
|-----------------|--|
| Specified Value | Appearance: No abnormality<br>Inductance change: Within $\pm 10\%$ |
|-----------------|--|

|                          |  |
|--------------------------|--|
| Test Methods and Remarks | Temperature: 85°C<br>Humidity: 85% RH.<br>Duration: 1000 hrs.<br>Unpowered<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |
|--------------------------|--|

### 9. Operational Life


|                 |  |
|-----------------|--|
| Specified Value | Appearance: No abnormality<br>Inductance change: Within $\pm 10\%$ |
|-----------------|--|

|                          |   |
|--------------------------|---|
| Test Methods and Remarks | Temperature: 85°C, End of part number "D" ⇒ 110°C<br>Duration: 1000 hours,<br>Rated current<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |
|--------------------------|---|

### 10. External Visual

|                 |                |
|-----------------|----------------|
| Specified Value | No abnormality |
|-----------------|----------------|

|                          |                                       |
|--------------------------|---------------------------------------|
| Test Methods and Remarks | Visual inspection shall be performed. |
|--------------------------|---------------------------------------|
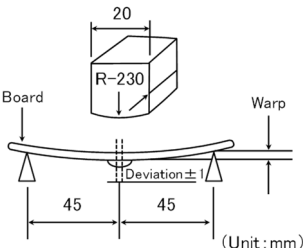
| 11. Physical Dimension           |  |
|----------------------------------|--|
| Specified Value                  | Refer to detailed specification  |
| Test Methods and Remarks         | Verify physical dimensions to the applicable device specification.   |
| 12. Mechanical Shock             |  |
| Specified Value                  | Appearance : No abnormality<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks         | Apply 3 shocks in each direction along 3 mutually perpendicular axes of the test specimen (18 shocks in total).<br>Peak value: 1500g<br>Duration: 0.5ms<br>Test pulse: Half-sine<br>Velocity change: 4.7m/s.   |
| 13. Vibration                    |  |
| Specified Value                  | Appearance : No abnormality<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks         | 5g's for 20 min., 12 cycles each of 3 orientations (36 cycles in total)<br>Test from: 10 Hz to 2000 Hz   |
| 14. Resistance to Soldering Heat |  |
| Specified Value                  | Appearance : No abnormality<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks         | No pre-heat of samples<br>Solder temperature: $260 \pm 5^\circ \text{C}$<br>Immersion time: $10 \pm 1$ sec.<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours.  |
| 15. ESD                          |  |
| Specified Value                  | Appearance : No abnormality<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks         | Per AEC-Q200-002   |
| 16. Solderability                |  |
| Specified Value                  | More than 95% of terminal electrode shall be covered with fresh solder.  |
| Test Methods and Remarks         | Per J-STD-002<br>a) Method B<br>Solder at $235 \pm 5^\circ \text{C}$ for 5 sec.<br>c) Method D<br>Solder at $260 \pm 5^\circ \text{C}$ for 30 sec.   |
| 17. Electrical Characterization  |  |
| Specified Value                  | Inductance at room temperature: Refer to detailed specification  |
| Test Methods and Remarks         | Min, Max, Mean and Standard deviation at room temperature as well as Min and Max operating temperatures.   |
| 18. Board Flex                   |  |
| Specified Value                  | Appearance : No abnormality  |
| Test Methods and Remarks         | Solder the test samples to the test boards by the reflow soldering.<br>Apply a force in a downward direction until amount of deflection reaches 2mm. The 2-mm deflection shall be held for 60 sec.<br>Test board dimensions: 100mm $\times$ 40mm $\times$ 1.6mm<br> |


19. Terminal Strength

Specified Value Appearance: No abnormality

Test Methods and Remarks


Per AEC-Q200-006  
 Solder test samples to the test boards shown in Fig 1..  
 Apply a force of 17.7N for 60±5 sec.

Fig.1



| Size(L × W) | a   | b   | c    |
|-------------|-----|-----|------|
| 1.6 × 0.8   | 1.0 | 3.0 | 1.2  |
| 2.0 × 1.25  | 1.2 | 4.0 | 1.65 |

Unit[mm]



►This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification.  
 For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

**Multilayer Metal Power Inductors MCOIL™ LCCN series  
for Automotive Body & Chassis and Infotainment**  
**Multilayer Metal Power Inductors MCOIL™ LBCN series  
for Telecommunications Infrastructure and Industrial Equipment**  
**Multilayer Metal Power Inductors MCOIL™ LMCN series  
for Medical Devices classified as GHTF Class C (Japan Class III)**

■ PRECAUTIONS

1. Circuit Design


|             |  |
|-------------|--|
| Precautions | <ul style="list-style-type: none"> <li>◆ Verification of operating environment, electrical rating and performance               <ol style="list-style-type: none"> <li>1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.</li> <li>2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.</li> </ol> </li> <li>◆ Operating Current (Verification of Rated current)               <ol style="list-style-type: none"> <li>1. The operating current including inrush current for inductors must always be lower than their rated values.</li> <li>2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.</li> </ol> </li> <li>◆ Temperature rise               <p>Temperature rise of power choke coil depends on the installation condition in end products.</p> <p>Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.</p> </li> </ul> |
|-------------|--|

2. PCB Design

|             |   |
|-------------|---|
| Precautions | <ul style="list-style-type: none"> <li>◆ Pattern configurations (Design of Land-patterns)               <p>When inductors are mounted on a PCB, the size of land patterns and the amount of solder used (size of fillet) can directly affect inductor performance. Therefore, the following items must be carefully considered in the design of solder land patterns:</p> <ol style="list-style-type: none"> <li>(1) The amount of solder applied can affect the ability of chips to withstand mechanical stresses which may lead to breaking or cracking. Therefore, when designing land-patterns it is necessary to consider the appropriate size and configuration of the solder pads which in turn determines the amount of solder necessary to form the fillets.</li> <li>(2) When more than one part is jointly soldered onto the same land or pad, the pad must be designed so that each component's soldering point is separated by solder-resist.</li> </ol> </li> <li>◆ Pattern configurations (Inductor layout on panelized [breakaway] PC boards)               <p>After inductors have been mounted on the boards, chips can be subjected to mechanical stresses in subsequent manufacturing processes (PCB cutting, board inspection, mounting of additional parts, assembly into the chassis, wave soldering the reflow soldered boards etc.) For this reason, planning pattern configurations and the position of SMD inductors should be carefully performed to minimize stress.</p> </li> </ul> |
|-------------|---|

| Technical considerations                    | <ul style="list-style-type: none"> <li>◆ Pattern configurations (Design of Land-patterns)               <p>The following diagrams and tables show some examples of recommended patterns to prevent excessive solder amounts. Examples of improper pattern designs are also shown.</p> <ol style="list-style-type: none"> <li>(1) Recommended land dimensions for a typical chip inductor land patterns for PCBs<br/>(Unit: mm)</li> </ol> <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>Type</th> <th>1608</th> <th>2012</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.7</td> <td>0.95</td> </tr> <tr> <td>B</td> <td>0.9</td> <td>0.8</td> </tr> <tr> <td>C</td> <td>1.0</td> <td>1.4</td> </tr> </tbody> </table> <div style="margin-left: 100px;"> </div> <ol style="list-style-type: none"> <li>(2) Examples of good and bad solder application</li> </ol> <table border="1" style="margin-left: 40px; width: 100%;"> <thead> <tr> <th style="width: 30%;">Item</th> <th style="width: 35%;">Not recommended</th> <th style="width: 35%;">Recommended</th> </tr> </thead> <tbody> <tr> <td>Mixed mounting of SMD and leaded components</td> <td></td> <td></td> </tr> <tr> <td>Component placement close to the chassis</td> <td></td> <td></td> </tr> </tbody> </table> </li></ul> | Type        | 1608 | 2012 | A | 0.7 | 0.95 | B | 0.9 | 0.8 | C | 1.0 | 1.4 | Item | Not recommended | Recommended | Mixed mounting of SMD and leaded components |  |  | Component placement close to the chassis |  |  |
|---|--|-------------|------|------|---|-----|------|---|-----|-----|---|-----|-----|------|-----------------|-------------|---|--|--|--|--|--|
| Type  | 1608   | 2012        |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| A   | 0.7  | 0.95        |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| B   | 0.9  | 0.8         |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| C   | 1.0  | 1.4         |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| Item  | Not recommended  | Recommended |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| Mixed mounting of SMD and leaded components |  |             |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |
| Component placement close to the chassis    |  |             |      |      |   |     |      |   |     |     |   |     |     |      |                 |             |   |  |  |  |  |  |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

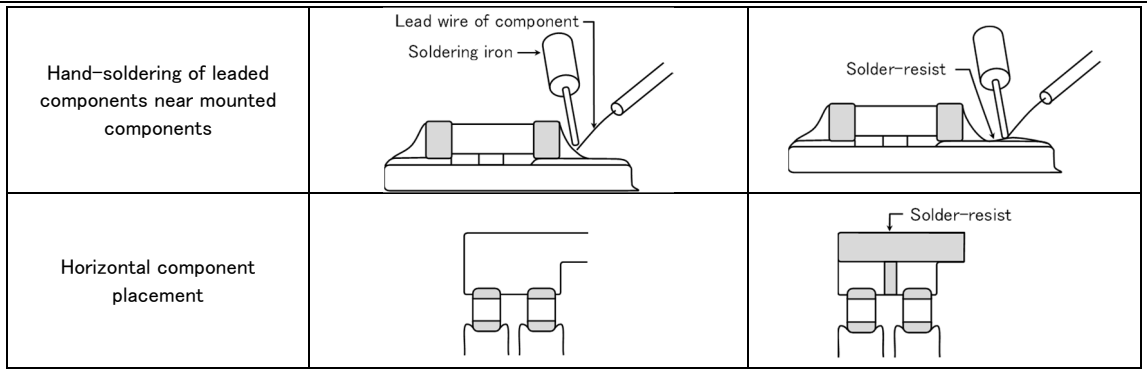


◆Pattern configurations (Inductor layout on panelized [breakaway] PC boards)

1. The following are examples of good and bad inductor layout; SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection.

| Item                    | Not recommended | Recommended  |
|-------------------------|-----------------|--|
| Deflection of the board |                 | <p data-bbox="1233 633 1469 725">Position the component at a right angle to the direction of the mechanical stresses that are anticipated.</p> |













2. To layout the inductors for the breakaway PC board, it should be noted that the amount of mechanical stresses given will vary depending on inductor layout.

An example below should be counted for better design.

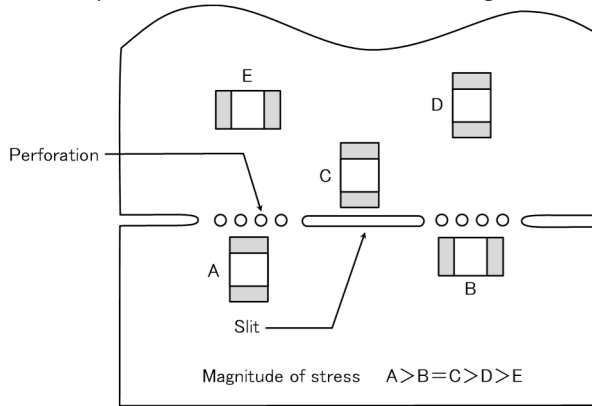


3. When breaking PC boards along their perforations, the amount of mechanical stress on the inductors can vary according to the method used. The following methods are listed in order from least stressful to most stressful: push-back, slit, V-grooving, and perforation. Thus, any ideal SMD inductor layout must also consider the PCB splitting procedure.

### 3. Considerations for automatic placement
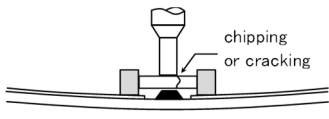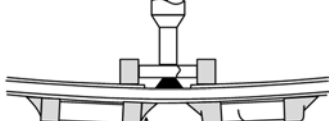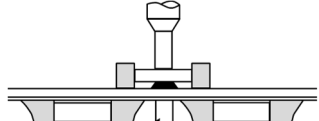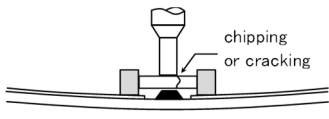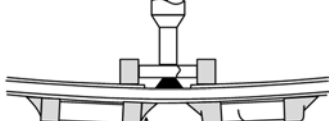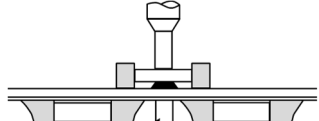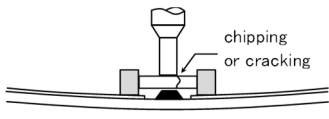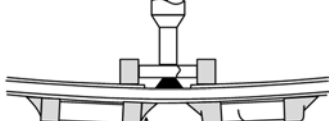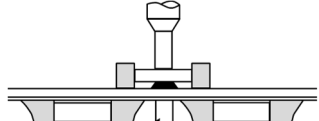
| Precautions              | <p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> <li>Excessive impact load should not be imposed on the inductors when mounting onto the PC boards.</li> <li>The maintenance and inspection of the mouter should be conducted periodically.</li> </ol>  |   |                 |               |                       |   |   |                       |   |   |
|--------------------------|--|---|-----------------|---------------|-----------------------|---|---|-----------------------|---|---|
| Technical considerations | <p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> <li>If the lower limit of the pick-up nozzle is low, too much force may be imposed on the inductors, causing damage. To avoid this, the following points should be considered before lowering the pick-up nozzle:             <ol style="list-style-type: none"> <li>The lower limit of the pick-up nozzle should be adjusted to the surface level of the PC board after correcting for deflection of the board.</li> <li>The pick-up pressure should be adjusted between 1 and 3N static loads.</li> <li>To reduce the amount of deflection of the board caused by impact of the pick-up nozzle, supporting pins or back-up pins should be used under the PC board. The following diagrams show some typical examples of good pick-up nozzle placement:</li> </ol> </li> </ol> <table border="1" data-bbox="347 468 1450 875"> <thead> <tr> <th data-bbox="347 468 614 495">Item</th> <th data-bbox="614 468 1034 495">Improper method</th> <th data-bbox="1034 468 1450 495">Proper method</th> </tr> </thead> <tbody> <tr> <td data-bbox="347 495 614 685">Single-sided mounting</td> <td data-bbox="614 495 1034 685">  </td> <td data-bbox="1034 495 1450 685">  </td> </tr> <tr> <td data-bbox="347 685 614 875">Double-sided mounting</td> <td data-bbox="614 685 1034 875">  </td> <td data-bbox="1034 685 1450 875">  </td> </tr> </tbody> </table> <ol style="list-style-type: none"> <li>As the alignment pin wears out, adjustment of the nozzle height can cause chipping or cracking of the inductors because of mechanical impact on the inductors. To avoid this, the monitoring of the width between the alignment pin in the stopped position, and maintenance, inspection and replacement of the pin should be conducted periodically.</li> </ol> | Item  | Improper method | Proper method | Single-sided mounting |  |  | Double-sided mounting |  |  |
| Item                     | Improper method  | Proper method   |                 |               |                       |   |   |                       |   |   |
| Single-sided mounting    |   |  |                 |               |                       |   |   |                       |   |   |
| Double-sided mounting    |   |  |                 |               |                       |   |   |                       |   |   |

### 4. Soldering
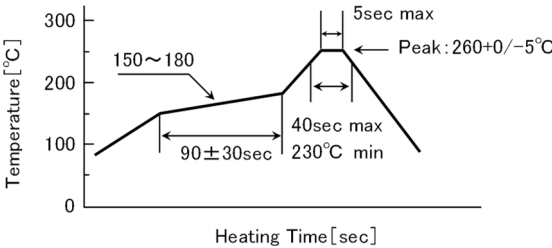
|                          |   |
|--------------------------|---|
| Precautions              | <p>◆Reflow soldering</p> <ul style="list-style-type: none"> <li>Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>The product shall be used reflow soldering only.</li> <li>Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> </ul> <p>◆Lead free soldering</p> <ul style="list-style-type: none"> <li>When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> </ul> <p>◆The conditions for Reworking with soldering irons</p> <ul style="list-style-type: none"> <li>Put the soldering iron on the land-pattern and don't touch it to the inductor directly.</li> </ul> <p>Soldering iron's temperature below 350 °C , Duration 3 seconds or less</p> |
| Technical considerations | <p>◆Reflow soldering</p> <ul style="list-style-type: none"> <li>If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ul> <p>Recommended reflow condition (Pb free solder)</p>  <p>The allowable number of reflow soldering is 3 times.</p>   |

### 5. Cleaning

|                          |  |
|--------------------------|--|
| Precautions              | <p>◆Cleaning conditions</p> <ul style="list-style-type: none"> <li>Washing by supersonic waves shall be avoided.</li> </ul>                |
| Technical considerations | <p>◆Cleaning conditions</p> <ul style="list-style-type: none"> <li>If washed by supersonic waves, the products might be broken.</li> </ul> |

## 6. Resin coating and mold

|             |  |
|-------------|--|
| Precautions | <ol style="list-style-type: none"><li>1. With some type of resins a decomposition gas or chemical reaction vapor may remain inside the resin during the hardening period or while left under normal storage conditions resulting in the deterioration of the inductor's performance.</li><li>2. Thermal expansion and thermal shrinkage characteristics of resins may lead to the deterioration of inductors' performance.</li><li>3. When a resin hardening temperature is higher than inductor operating temperature, the stresses generated by the excessive heat may lead to damage in inductors.</li><li>4. In prior to use, please make the reliability evaluation with the product mounted in your application set.</li></ol> |
|-------------|--|

## 7. Handling

|             |   |
|-------------|---|
| Precautions | <ul style="list-style-type: none"><li>◆ Breakaway PC boards (splitting along perforations)<ol style="list-style-type: none"><li>1. When splitting the PC board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board.</li><li>2. Board separation should not be done manually, but by using the appropriate devices.</li></ol></li><li>◆ General handling precautions<ul style="list-style-type: none"><li>• Always wear static control bands to protect against ESD.</li><li>• Keep the inductors away from all magnets and magnetic objects.</li><li>• Use non-magnetic tweezers when handling inductors.</li><li>• Any devices used with the inductors ( soldering irons, measuring instruments) should be properly grounded.</li><li>• Keep bare hands and metal products (i.e., metal desk) away from inductor electrodes or conductive areas that lead to chip electrodes.</li><li>• Keep inductors away from items that generate magnetic fields such as speakers or coils.</li></ul></li><li>◆ Mechanical considerations<p>Be careful not to subject the inductors to excessive mechanical shocks.</p><ol style="list-style-type: none"><li>(1) If inductors are dropped on the floor or a hard surface they should not be used.</li><li>(2) When handling the mounted boards, be careful that the mounted components do not come in contact with or bump against other boards or components.</li></ol></li></ul> |
|-------------|---|

## 8. Storage conditions

|                          |  |
|--------------------------|--|
| Precautions              | <ul style="list-style-type: none"><li>◆ Storage<p>To maintain the solderability of terminal electrodes and to keep the packaging material in good condition, care must be taken to control temperature and humidity in the storage area. Humidity should especially be kept as low as possible.</p><ul style="list-style-type: none"><li>• Recommended conditions<br/>Ambient temperature: 30°C or below    Humidity: 30% to 70%</li></ul><p>The ambient temperature must be kept -5°C to +40°C. Even under ideal storage conditions, solderability of inductor is deteriorated as time passes, so inductors should be used within 6 months from the time of delivery.</p><ul style="list-style-type: none"><li>• Inductor should be kept where no chlorine or sulfur exists in the air.</li></ul></li></ul> |
| Technical considerations | <ul style="list-style-type: none"><li>◆ Storage<p>If the parts are stocked in a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/package materials may take place. For this reason, components should be used within 6 months from the time of delivery. If exceeding the above period, please check solderability before using the inductors.</p></li></ul>   |



# 车载(车身系 / 情报系)用途 绕线型金属系功率电感器 MCOIL™ LCDN 系列

系列前的记号来自型号, 用来区分产品的种类和特性等。

AEC-Q200 Grade 3 (已完成 Grade 3 条件下的评价测试。)

\*使用环境温度: -40~85°C

回流焊

AEC-Q200

## ■ 型号标示法

\*使用温度范围 : -40~125°C (包含产品本身发热)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |  |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|--|
| L | C | D | N | D | 2 | 0 | 2 | 0 | K | K | T | 1 | R | 0 | M | M |  |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |   |   |   |   |   |   |   |   |  |

## ① 系列

|                       |                             |
|-----------------------|-----------------------------|
| 代码<br>(1) (2) (3) (4) |                             |
| LCDN                  | 车载(车身系 / 情报系)用途 绕线型金属系功率电感器 |

## (1) 产品群

|    |     |
|----|-----|
| 代码 |     |
| L  | 电感器 |

## (2) 范畴

|    |                    |      |
|----|--------------------|------|
| 代码 | 推荐设备               | 品质等级 |
| C  | 汽车用电子设备(车身系 / 情报系) | 2    |

## ② 特征

|    |             |
|----|-------------|
| 代码 | 特征          |
| D  | 底面电极 (银×焊料) |

## ③ 尺寸 (L×W)

|      |               |
|------|---------------|
| 代码   | 尺寸 (L×W) [mm] |
| 2020 | 2.0×2.0       |
| 3030 | 3.0×3.0       |
| 4040 | 4.0×4.0       |

## ④ 尺寸 (H)

|    |             |
|----|-------------|
| 代码 | 尺寸 (H) [mm] |
| KK | 1.0         |
| MK | 1.2         |
| WK | 2.0         |

## (3) 类型

|    |           |
|----|-----------|
| 代码 |           |
| D  | 绕线型金属系 鼓型 |

## (4) 特效 / 特性

|    |        |
|----|--------|
| 代码 |        |
| N  | 一般功率扼流 |

## ⑤ 包装

|    |      |
|----|------|
| 代码 | 包装   |
| T  | 卷盘带装 |

## ⑥ 标称电感值

|        |                  |
|--------|------------------|
| 代码 (例) | 标称电感值 [ $\mu$ H] |
| R47    | 0.47             |
| 1R0    | 1.0              |
| 4R7    | 4.7              |

※R=小数点

## ⑦ 电感量公差


|    |       |
|----|-------|
| 代码 | 电感量公差 |
| M  | ±20%  |
| N  | ±30%  |

## ⑧ 个别规格

|    |        |
|----|--------|
| 代码 | 个别规格   |
| F  | 铁氧体外涂品 |
| M  | 金属外涂品  |

## ⑨ 管理记号

## ■标准外型尺寸

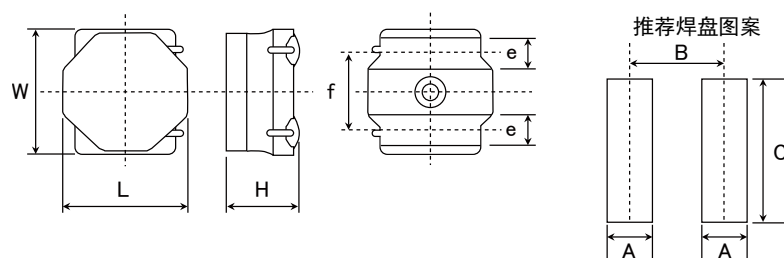

| Type | A    | B    | C   |
|------|------|------|-----|
| 2020 | 0.65 | 1.35 | 2.0 |
| 3030 | 0.8  | 2.2  | 2.7 |
| 4040 | 1.2  | 2.8  | 3.7 |

单位: mm

| Type   | L                         | W                         | H                      | e                         | f                         | 标准数量 [pcs]<br>卷盘带装 |
|--------|---------------------------|---------------------------|------------------------|---------------------------|---------------------------|--------------------|
| 2020KK | 2.0±0.15<br>(0.079±0.006) | 2.0±0.15<br>(0.079±0.006) | 1.0 max<br>(0.039 max) | 0.50±0.2<br>(0.02±0.008)  | 1.25±0.2<br>(0.049±0.008) | 2500               |
| 2020MK | 2.0±0.15<br>(0.079±0.006) | 2.0±0.15<br>(0.079±0.006) | 1.2 max<br>(0.047 max) | 0.50±0.2<br>(0.02±0.008)  | 1.25±0.2<br>(0.049±0.008) | 2500               |
| 3030KK | 3.0±0.1<br>(0.118±0.004)  | 3.0±0.1<br>(0.118±0.004)  | 1.0 max<br>(0.039 max) | 0.90±0.2<br>(0.035±0.008) | 1.9±0.2<br>(0.075±0.008)  | 2000               |
| 3030MK | 3.0±0.1<br>(0.118±0.004)  | 3.0±0.1<br>(0.118±0.004)  | 1.2 max<br>(0.047 max) | 0.90±0.2<br>(0.035±0.008) | 1.9±0.2<br>(0.075±0.008)  | 2000               |
| 4040MK | 4.0±0.2<br>(0.157±0.008)  | 4.0±0.2<br>(0.157±0.008)  | 1.2 max<br>(0.047 max) | 1.1±0.2<br>(0.043±0.008)  | 2.5±0.2<br>(0.098±0.008)  | 1000               |
| 4040WK | 4.0±0.2<br>(0.157±0.008)  | 4.0±0.2<br>(0.157±0.008)  | 2.0 max<br>(0.079 max) | 1.1±0.2<br>(0.043±0.008)  | 2.5±0.2<br>(0.098±0.008)  | 700                |

单位: mm (inch)

■ PART NUMBER

• All the Wire-wound Metal Power Inductors of the catalog lineup are RoHS compliant.

Notes)

- The exchange of individual specifications is necessary depending on your application and/or circuit condition. Please contact TAIYO YUDEN's official sales channel.
- For Automotive (AEC-Q200 Qualified) products for BODY & CHASSIS, and INFOTAINMENT. Please check "Automotive Application Guide" for further details before using the products.

< AEC-Q200 :AEC-Q200 qualified>

All the Wire-wound Metal Power Inductors for Automotive products are tested based on the test conditions and methods defined in AEC-Q200 by family item.

Please consult with TAIYO YUDEN's official sales channel for the details of the product specifications and AEC-Q200 test results, etc.,

and please review and approve the product specifications before ordering.

● 2020KK type [Thickness: 1.0mm max]

| New part number   | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA]                         |   | Measuring frequency [MHz] |
|-------------------|---------------------------------|-------------------------------|----------------------|-----------------------------------|---|---|---------------------------|
|                   |                                 |                               |                      |                                   | Saturation current I <sub>dc1</sub> Max (Typ) | Temperature rise current I <sub>dc2</sub> Max (Typ) |                           |
| LCDND2020KKT4R7MM | MDKK2020TR47MM V                | 0.47                          | ±20%                 | 0.046                             | 3,500 (4,150)                                 | 2,200 (2,500)                                       | 1                         |
| LCDND2020KKT68MM  | MDKK2020TR68MM V                | 0.68                          | ±20%                 | 0.060                             | 3,200 (3,650)                                 | 2,000 (2,100)                                       | 1                         |
| LCDND2020KKT1R0MM | MDKK2020T1R0MM V                | 1                             | ±20%                 | 0.085                             | 2,900 (3,400)                                 | 1,700 (1,900)                                       | 1                         |
| LCDND2020KKT1R5MM | MDKK2020T1R5MM V                | 1.5                           | ±20%                 | 0.133                             | 1,900 (2,250)                                 | 1,350 (1,500)                                       | 1                         |
| LCDND2020KKT2R2MM | MDKK2020T2R2MM V                | 2.2                           | ±20%                 | 0.165                             | 1,650 (1,950)                                 | 1,200 (1,350)                                       | 1                         |
| LCDND2020KKT3R3MM | MDKK2020T3R3MM V                | 3.3                           | ±20%                 | 0.275                             | 1,300 (1,550)                                 | 940 (1,050)   | 1                         |
| LCDND2020KKT4R7MM | MDKK2020T4R7MM V                | 4.7                           | ±20%                 | 0.435                             | 1,050 (1,250)                                 | 750 (850)   | 1                         |
| LCDND2020KKT100MM | MDKK2020T100MM V                | 10                            | ±20%                 | 0.690                             | 750 (900)                                     | 630 (680)   | 1                         |

Absolute maximum voltage: DC20V

● 2020MK type [Thickness: 1.2mm max]

| New part number   | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA]                         |   | Measuring frequency [MHz] |
|-------------------|---------------------------------|-------------------------------|----------------------|-----------------------------------|---|---|---------------------------|
|                   |                                 |                               |                      |                                   | Saturation current I <sub>dc1</sub> Max (Typ) | Temperature rise current I <sub>dc2</sub> Max (Typ) |                           |
| LCDND2020MKT4R7MM | MDMK2020TR47MM V                | 0.47                          | ±20%                 | 0.046                             | 4,200 (4,800)                                 | 2,300 (2,450)                                       | 1                         |
| LCDND2020MKT68MM  | MDMK2020TR68MM V                | 0.68                          | ±20%                 | 0.058                             | 3,500 (4,100)                                 | 2,000 (2,200)                                       | 1                         |
| LCDND2020MKT1R0MM | MDMK2020T1R0MM V                | 1                             | ±20%                 | 0.064                             | 2,550 (2,900)                                 | 1,900 (2,050)                                       | 1                         |
| LCDND2020MKT1R5MM | MDMK2020T1R5MM V                | 1.5                           | ±20%                 | 0.086                             | 2,000 (2,300)                                 | 1,650 (1,750)                                       | 1                         |
| LCDND2020MKT2R2MM | MDMK2020T2R2MM V                | 2.2                           | ±20%                 | 0.109                             | 1,750 (2,000)                                 | 1,450 (1,550)                                       | 1                         |
| LCDND2020MKT3R3MM | MDMK2020T3R3MM V                | 3.3                           | ±20%                 | 0.178                             | 1,350 (1,550)                                 | 1,150 (1,200)                                       | 1                         |
| LCDND2020MKT4R7MM | MDMK2020T4R7MM V                | 4.7                           | ±20%                 | 0.242                             | 1,150 (1,300)                                 | 950 (1,050)   | 1                         |

Absolute maximum voltage: DC20V

● 3030KK type [Thickness: 1.0mm max]

| New part number   | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA]                         |   | Measuring frequency [MHz] |
|-------------------|---------------------------------|-------------------------------|----------------------|-----------------------------------|---|---|---------------------------|
|                   |                                 |                               |                      |                                   | Saturation current I <sub>dc1</sub> Max (Typ) | Temperature rise current I <sub>dc2</sub> Max (Typ) |                           |
| LCDND3030KKT4R7MM | MDKK3030TR47MM V                | 0.47                          | ±20%                 | 0.039                             | 5,400 (6,500)                                 | 3,900 (4,500)                                       | 1                         |
| LCDND3030KKT1R0MM | MDKK3030T1R0MM V                | 1.0                           | ±20%                 | 0.086                             | 4,400 (5,200)                                 | 2,400 (2,800)                                       | 1                         |
| LCDND3030KKT1R5MM | MDKK3030T1R5MM V                | 1.5                           | ±20%                 | 0.100                             | 3,000 (3,500)                                 | 2,100 (2,400)                                       | 1                         |
| LCDND3030KKT2R2MM | MDKK3030T2R2MM V                | 2.2                           | ±20%                 | 0.144                             | 2,500 (3,000)                                 | 1,900 (2,200)                                       | 1                         |
| LCDND3030KKT3R3MM | MDKK3030T3R3MM V                | 3.3                           | ±20%                 | 0.248                             | 2,000 (2,400)                                 | 1,350 (1,500)                                       | 1                         |
| LCDND3030KKT4R7MM | MDKK3030T4R7MM V                | 4.7                           | ±20%                 | 0.345                             | 1,700 (2,000)                                 | 1,150 (1,300)                                       | 1                         |
| LCDND3030KKT6R8MM | MDKK3030T6R8MM V                | 6.8                           | ±20%                 | 0.437                             | 1,400 (1,700)                                 | 1,000 (1,150)                                       | 1                         |
| LCDND3030KKT100MM | MDKK3030T100MM V                | 10                            | ±20%                 | 0.575                             | 1,100 (1,300)                                 | 850 (1,000)   | 1                         |

Absolute maximum voltage: DC20V

● 3030MK type [Thickness: 1.2mm max]

| New part number   | Old part number (for reference) | Nominal inductance [ $\mu$ H] | Inductance tolerance | DC Resistance [ $\Omega$ ] (max.) | Rated current ※) [mA]                         |   | Measuring frequency [MHz] |
|-------------------|---------------------------------|-------------------------------|----------------------|-----------------------------------|---|---|---------------------------|
|                   |                                 |                               |                      |                                   | Saturation current I <sub>dc1</sub> Max (Typ) | Temperature rise current I <sub>dc2</sub> Max (Typ) |                           |
| LCDND3030MKT3R3MM | MDMK3030TR30MM V                | 0.30                          | ±20%                 | 0.020                             | 7,600 (9,200)                                 | 5,500 (6,400)                                       | 1                         |
| LCDND3030MKT3R3MM | MDMK3030TR33MM V                | 0.33                          | ±20%                 | 0.020                             | 6,400 (8,700)                                 | 5,500 (6,400)                                       | 1                         |
| LCDND3030MKT4R7MM | MDMK3030TR47MM V                | 0.47                          | ±20%                 | 0.027                             | 6,300 (7,500)                                 | 4,700 (5,500)                                       | 1                         |
| LCDND3030MKT1R0MM | MDMK3030T1R0MM V                | 1.0                           | ±20%                 | 0.050                             | 4,300 (5,100)                                 | 3,300 (3,900)                                       | 1                         |
| LCDND3030MKT1R5MM | MDMK3030T1R5MM V                | 1.5                           | ±20%                 | 0.074                             | 3,400 (4,100)                                 | 2,500 (3,000)                                       | 1                         |
| LCDND3030MKT2R2MM | MDMK3030T2R2MM V                | 2.2                           | ±20%                 | 0.112                             | 2,800 (3,600)                                 | 2,100 (2,400)                                       | 1                         |
| LCDND3030MKT3R3MM | MDMK3030T3R3MM V                | 3.3                           | ±20%                 | 0.173                             | 2,100 (2,700)                                 | 1,650 (1,900)                                       | 1                         |
| LCDND3030MKT4R7MM | MDMK3030T4R7MM V                | 4.7                           | ±20%                 | 0.263                             | 1,800 (2,300)                                 | 1,350 (1,550)                                       | 1                         |

Absolute maximum voltage: DC20V

※) The saturation current value (I<sub>dc1</sub>) is the DC current value having inductance decrease down to 30%. (at 20°C)

※1-1) The temperature rise current value (I<sub>dc2</sub>) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.0mm copper thickness: 0.035mm, board size: 110 × 30 × 1.0mm, land size: 12.6 × 19.6mm). (at 20°C)

※1-2) The temperature rise current value (I<sub>dc2</sub>) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.6mm copper thickness: 0.050mm, board size: 100 × 100 × 1.6mm, land size: 14.6 × 43mm). (at 20°C)

※1-3) The temperature rise current value (I<sub>dc2</sub>) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.6mm copper thickness: 0.050mm, board size: 100 × 100 × 1.6mm, land size: 44.5 × 90mm). (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

※1-1) 2020KK, 2020MK type

※1-2) 3030KK, 3030MK type

※1-3) 4040MK, 4040WK type

## PART NUMBER

## ● 4040MK F type [Thickness: 1.2mm max]

| New part number    | Old part number<br>(for reference) | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[ $\Omega$ ] (max.) | Rated current ※) [mA]                   |   | Measuring<br>frequency [kHz] |
|--------------------|------------------------------------|----------------------------------|----------------------|--------------------------------------|---|---|------------------------------|
|                    |                                    |                                  |                      |                                      | Saturation current<br>Idc1<br>Max (Typ) | Temperature rise current<br>Idc2<br>Max (Typ) |                              |
| LCDND4040MKT1R47MF | MDMK4040TR47MF V                   | 0.47                             | $\pm 20\%$           | 0.029                                | 7,500 (10,000)                          | 4,600 (5,400)                                 | 100                          |
| LCDND4040MKT1R0MF  | MDMK4040T1R0MF V                   | 1.0                              | $\pm 20\%$           | 0.047                                | 5,200 (7,500)                           | 3,500 (4,200)                                 | 100                          |
| LCDND4040MKT1R2MF  | MDMK4040T1R2MF V                   | 1.2                              | $\pm 20\%$           | 0.047                                | 4,200 (6,200)                           | 3,500 (4,200)                                 | 100                          |
| LCDND4040MKT1R5MF  | MDMK4040T1R5MF V                   | 1.5                              | $\pm 20\%$           | 0.065                                | 3,700 (5,400)                           | 3,300 (3,600)                                 | 100                          |
| LCDND4040MKT2R2MF  | MDMK4040T2R2MF V                   | 2.2                              | $\pm 20\%$           | 0.092                                | 3,200 (4,500)                           | 2,500 (2,900)                                 | 100                          |

Absolute maximum voltage: DC25V

## ● 4040MK type [Thickness: 1.2mm max]

| New part number    | Old part number<br>(for reference) | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[ $\Omega$ ] (max.) | Rated current ※) [mA]                   |   | Measuring<br>frequency [MHz] |
|--------------------|------------------------------------|----------------------------------|----------------------|--------------------------------------|---|---|------------------------------|
|                    |                                    |                                  |                      |                                      | Saturation current<br>Idc1<br>Max (Typ) | Temperature rise current<br>Idc2<br>Max (Typ) |                              |
| LCDND4040MKT1R68MM | MDMK4040TR68MM V                   | 0.68                             | $\pm 20\%$           | 0.029                                | 6,700 (7,800)                           | 5,000 (5,700)                                 | 1                            |
| LCDND4040MKT1R0MM  | MDMK4040T1R0MM V                   | 1.0                              | $\pm 20\%$           | 0.036                                | 5,000 (6,200)                           | 4,500 (5,100)                                 | 1                            |
| LCDND4040MKT1R5MM  | MDMK4040T1R5MM V                   | 1.5                              | $\pm 20\%$           | 0.065                                | 4,500 (5,600)                           | 3,200 (3,600)                                 | 1                            |
| LCDND4040MKT2R2MM  | MDMK4040T2R2MM V                   | 2.2                              | $\pm 20\%$           | 0.079                                | 3,800 (4,500)                           | 2,800 (3,200)                                 | 1                            |
| LCDND4040MKT3R3MM  | MDMK4040T3R3MM V                   | 3.3                              | $\pm 20\%$           | 0.130                                | 3,200 (4,000)                           | 2,200 (2,500)                                 | 1                            |
| LCDND4040MKT4R7MM  | MDMK4040T4R7MM V                   | 4.7                              | $\pm 20\%$           | 0.160                                | 2,500 (3,000)                           | 1,900 (2,200)                                 | 1                            |
| LCDND4040MKT6R8MM  | MDMK4040T6R8MM V                   | 6.8                              | $\pm 20\%$           | 0.230                                | 1,900 (2,200)                           | 1,600 (1,800)                                 | 1                            |
| LCDND4040MKT100MM  | MDMK4040T100MM V                   | 10                               | $\pm 20\%$           | 0.330                                | 1,700 (2,000)                           | 1,400 (1,600)                                 | 1                            |

Absolute maximum voltage: DC25V

## ● 4040WK type [Thickness: 2.0mm max]

| New part number    | Old part number<br>(for reference) | Nominal inductance<br>[ $\mu$ H] | Inductance tolerance | DC Resistance<br>[ $\Omega$ ] (max.) | Rated current ※) [mA]                   |   | Measuring<br>frequency [MHz] |
|--------------------|------------------------------------|----------------------------------|----------------------|--------------------------------------|---|---|------------------------------|
|                    |                                    |                                  |                      |                                      | Saturation current<br>Idc1<br>Max (Typ) | Temperature rise current<br>Idc2<br>Max (Typ) |                              |
| LCDND4040WKT1R56NM | MDWK4040TR56NM V                   | 0.56                             | $\pm 20\%$           | 0.016                                | 9,000 (13,000)                          | 6,500 (7,500)                                 | 1                            |
| LCDND4040WKT1R68MM | MDWK4040TR68MM V                   | 0.68                             | $\pm 20\%$           | 0.016                                | 8,000 (12,000)                          | 7,300 (8,300)                                 | 1                            |
| LCDND4040WKT1R0MM  | MDWK4040T1R0MM V                   | 1.0                              | $\pm 20\%$           | 0.027                                | 7,000 (9,400)                           | 5,100 (5,800)                                 | 1                            |
| LCDND4040WKT1R5MM  | MDWK4040T1R5MM V                   | 1.5                              | $\pm 20\%$           | 0.041                                | 7,000 (9,400)                           | 4,100 (4,700)                                 | 1                            |
| LCDND4040WKT2R2MM  | MDWK4040T2R2MM V                   | 2.2                              | $\pm 20\%$           | 0.054                                | 5,400 (7,500)                           | 3,500 (4,000)                                 | 1                            |
| LCDND4040WKT3R3MM  | MDWK4040T3R3MM V                   | 3.3                              | $\pm 20\%$           | 0.075                                | 3,700 (5,200)                           | 3,000 (3,300)                                 | 1                            |
| LCDND4040WKT4R7MM  | MDWK4040T4R7MM V                   | 4.7                              | $\pm 20\%$           | 0.107                                | 3,500 (5,000)                           | 2,500 (2,800)                                 | 1                            |
| LCDND4040WKT6R8MM  | MDWK4040T6R8MM V                   | 6.8                              | $\pm 20\%$           | 0.158                                | 2,900 (4,000)                           | 2,000 (2,300)                                 | 1                            |
| LCDND4040WKT100MM  | MDWK4040T100MM V                   | 10                               | $\pm 20\%$           | 0.194                                | 2,200 (3,100)                           | 1,600 (1,900)                                 | 1                            |

Absolute maximum voltage: DC25V

※) The saturation current value (Idc1) is the DC current value having inductance decrease down to 30%. (at 20°C)

※1-1) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.0mm copper thickness: 0.035mm, board size: 110 × 30 × 1.0mm, land size: 12.6 × 19.6mm). (at 20°C)

※1-2) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.6mm copper thickness: 0.050mm, board size: 100 × 100 × 1.6mm, land size: 14.6 × 43mm). (at 20°C)

※1-3) The temperature rise current value (Idc2) is the DC current value having temperature increase by 40°C, when mounted in FR4 High heat dissipation board (board thickness: 1.6mm copper thickness: 0.050mm, board size: 100 × 100 × 1.6mm, land size: 44.5 × 90mm). (at 20°C)

※) The rated current is the DC current value that satisfies both of current value saturation current value and temperature rise current value.

※1-1) 2020KK, 2020MK type

※1-2) 3030KK, 3030MK type







※1-3) 4040MK, 4040WK type

Derating of Rated Current

LCDN series

Derating of current is necessary for LCDN series depending on ambient temperature.

Please refer to the chart shown below for appropriate derating of current.

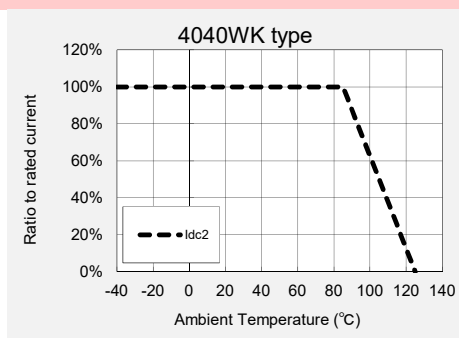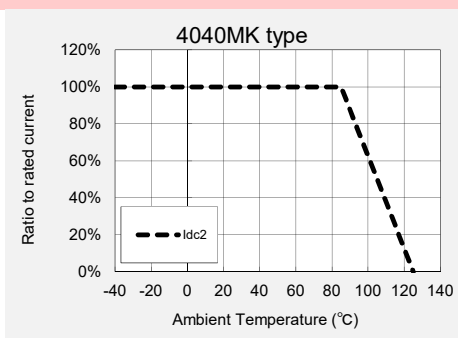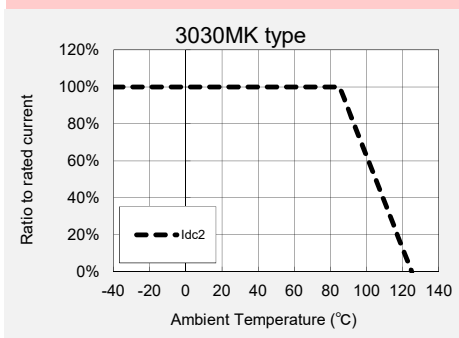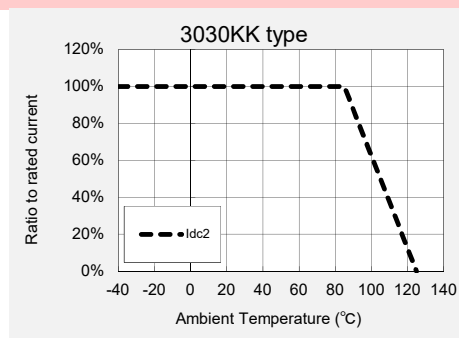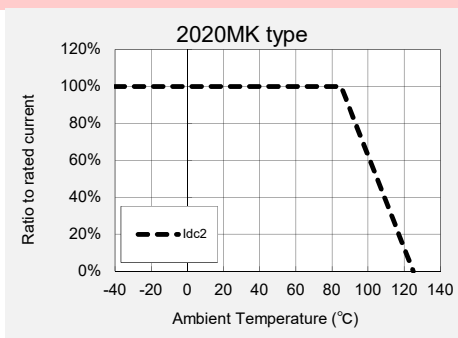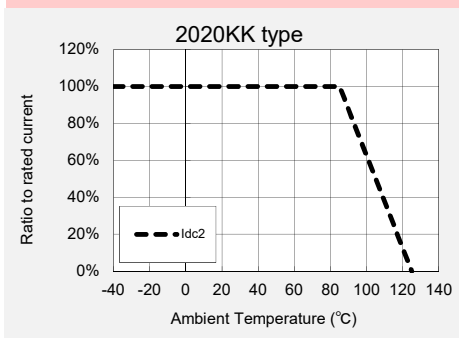

This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# Wire-wound Metal Power Inductors MCOIL™ LSDN/LCDN/LBDN/LLDN/LMDN series


## PACKAGING

### ① Minimum Quantity

| Type   | Standard Quantity [pcs] |
|--------|-------------------------|
|        | Tape & Reel             |
| 1616KK | 2500                    |
| 2020JE | 2500                    |
| 2020KK |                         |
| 2020MK |                         |
| 3030KK | 2000                    |
| 3030MK |                         |
| 4040JE | 1000                    |
| 4040MK |                         |
| 4040WK |                         |
| 5050PK | 1000                    |


### ② Tape Material

#### ● Embossed Tape

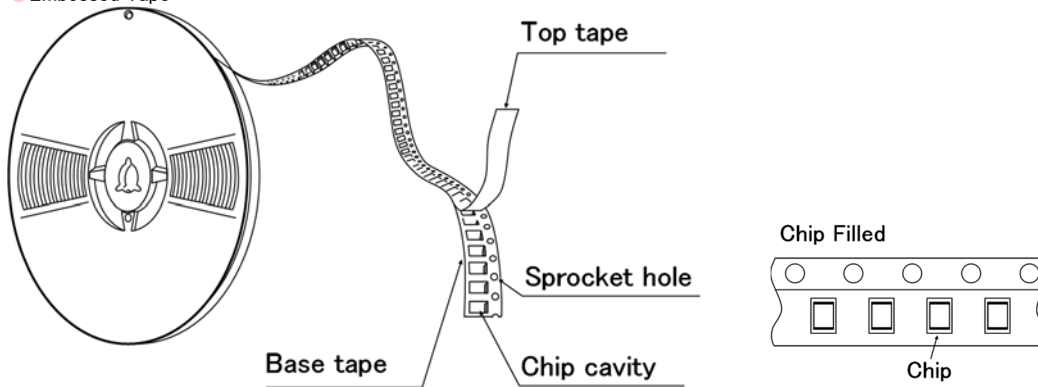

### ③ Taping dimensions

#### ● Embossed tape 8mm wide (0.315 inches wide)

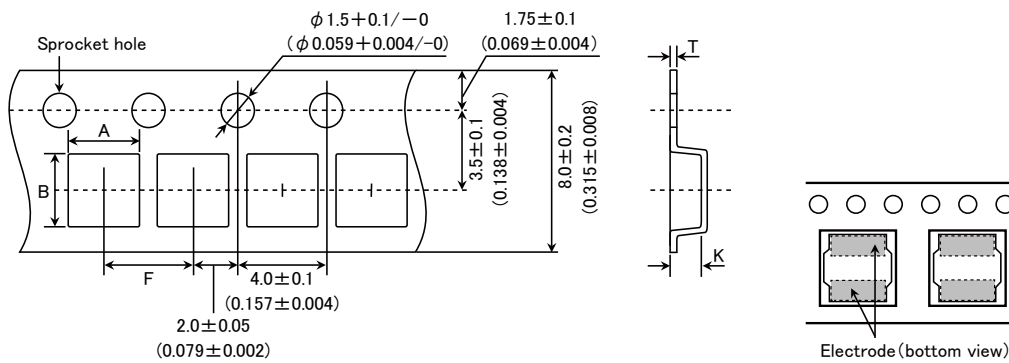


| Type                       | Chip cavity                             |   | Insertion pitch                        | Tape thickness                           |  |
|----------------------------|---|---|--|--|--|
|                            | A                                       | B                                       | F                                      | T  | K                                      |
| 1616KK                     | $1.79 \pm 0.1$<br>( $0.071 \pm 0.004$ ) | $1.79 \pm 0.1$<br>( $0.071 \pm 0.004$ ) | $4.0 \pm 0.1$<br>( $0.157 \pm 0.004$ ) | $0.25 \pm 0.05$<br>( $0.010 \pm 0.002$ ) | $1.1 \pm 0.1$<br>( $0.043 \pm 0.004$ ) |
| 2020JE<br>2020KK<br>2020MK | $2.2 \pm 0.1$<br>( $0.102 \pm 0.004$ )  | $2.2 \pm 0.1$<br>( $0.102 \pm 0.004$ )  | $4.0 \pm 0.1$<br>( $0.157 \pm 0.004$ ) | $0.25 \pm 0.05$<br>( $0.009 \pm 0.002$ ) | $1.3 \pm 0.1$<br>( $0.051 \pm 0.004$ ) |
| 3030KK<br>3030MK           | $3.2 \pm 0.1$<br>( $0.126 \pm 0.004$ )  | $3.2 \pm 0.1$<br>( $0.126 \pm 0.004$ )  | $4.0 \pm 0.1$<br>( $0.157 \pm 0.004$ ) | $0.3 \pm 0.05$<br>( $0.012 \pm 0.002$ )  | $1.4 \pm 0.1$<br>( $0.055 \pm 0.004$ ) |

Unit : mm (inch)

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).


● Embossed tape 12mm wide (0.47 inches wide)

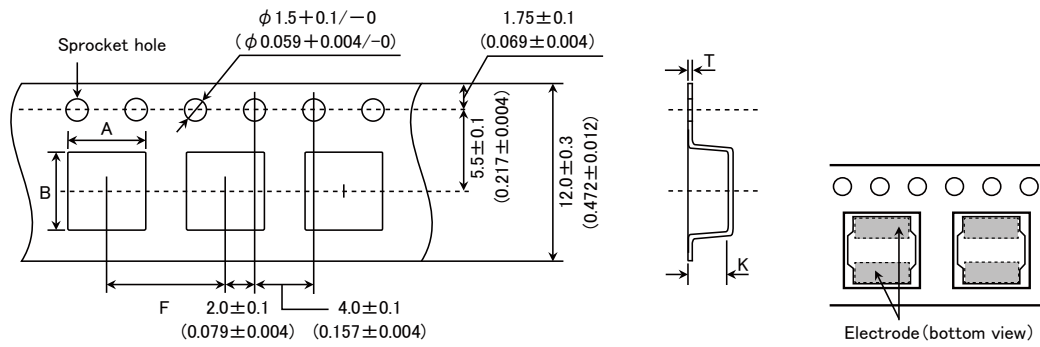

| Type   | Chip cavity         |                     | Insertion pitch<br>F | Tape thickness      |                     |
|--------|---------------------|---------------------|----------------------|---------------------|---------------------|
|        | A                   | B                   |                      | T                   | K                   |
| 4040JE | $4.3 \pm 0.1$       | $4.3 \pm 0.1$       | $8.0 \pm 0.1$        | $0.3 \pm 0.05$      | $1.6 \pm 0.1$       |
| 4040MK | $(0.169 \pm 0.004)$ | $(0.169 \pm 0.004)$ | $(0.315 \pm 0.004)$  | $(0.012 \pm 0.002)$ | $(0.063 \pm 0.004)$ |
| 4040WK | $4.3 \pm 0.1$       | $4.3 \pm 0.1$       | $8.0 \pm 0.1$        | $0.3 \pm 0.05$      | $2.3 \pm 0.1$       |
|        | $(0.169 \pm 0.004)$ | $(0.169 \pm 0.004)$ | $(0.315 \pm 0.004)$  | $(0.012 \pm 0.002)$ | $(0.091 \pm 0.004)$ |
| 5050PK | $5.25 \pm 0.1$      | $5.25 \pm 0.1$      | $8.0 \pm 0.1$        | $0.3 \pm 0.1$       | $1.6 \pm 0.1$       |
|        | $(0.207 \pm 0.004)$ | $(0.207 \pm 0.004)$ | $(0.315 \pm 0.004)$  | $(0.012 \pm 0.004)$ | $(0.063 \pm 0.004)$ |


Unit: mm (inch)

④ Leader and Blank portion

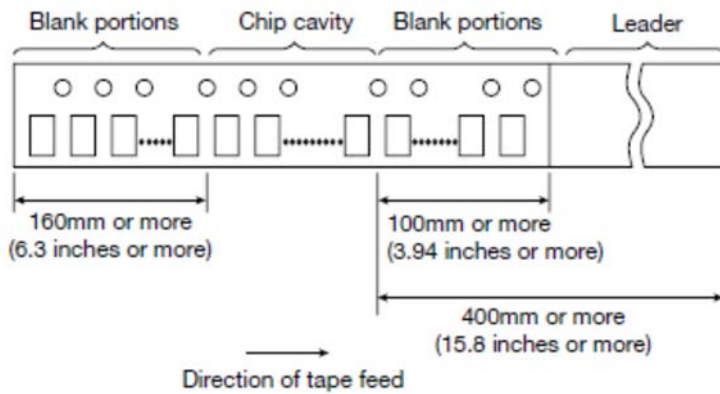

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

⑤ Reel size

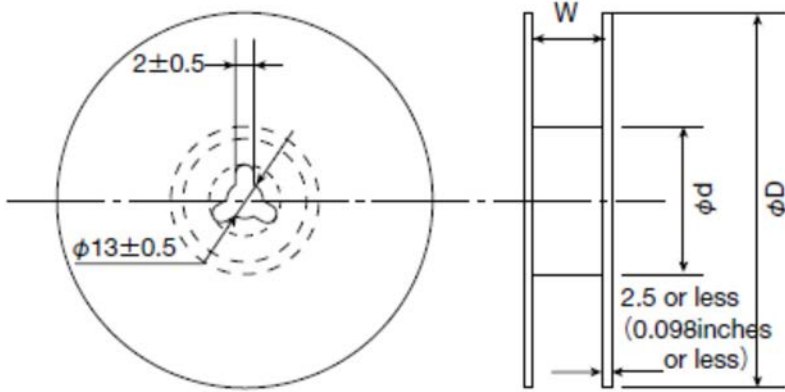


| Type   | Reel size (Reference values) |                       |                           |
|--------|------------------------------|-----------------------|---------------------------|
|        | $\phi D$                     | $\phi d$              | W                         |
| 1616KK | 180±0.5<br>(7.087±0.019)     | 60±1.0<br>(2.36±0.04) | 10.0±1.5<br>(0.394±0.059) |
| 2020JE |                              |                       |                           |
| 2020KK |                              |                       |                           |
| 2020MK |                              |                       |                           |
| 3030KK | 180±3.0<br>(7.087±0.118)     | 60±2.0<br>(2.36±0.08) | 14.0±1.5<br>(0.551±0.059) |
| 3030MK |                              |                       |                           |
| 4040JE | 180±3.0<br>(7.087±0.118)     | 60±2.0<br>(2.36±0.08) | 14.0±1.5<br>(0.551±0.059) |
| 4040MK |                              |                       |                           |
| 4040WK |                              |                       |                           |
| 5050PK |                              |                       |                           |

Unit: mm (inch)

⑥ Top Tape Strength

Top tape strength

| Type     | Peel-off strength |
|----------|-------------------|
| MDKK1616 | 0.1N~1.0N         |
| MDJE2020 |                   |
| MDKK2020 |                   |
| MDMK2020 |                   |
| MDKK3030 | 0.1N~1.3N         |
| MDMK3030 |                   |
| MDJE4040 |                   |
| MDMK4040 |                   |
| MDWK4040 |                   |
| MDPK5050 |                   |

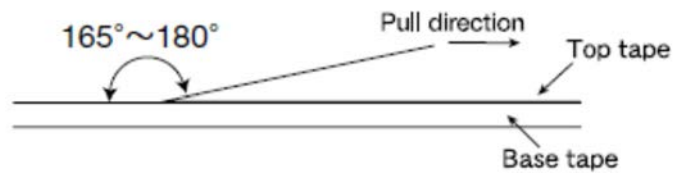



# Wire-wound Metal Power Inductors MCOIL™ LCDN series for Automotive Body & Chassis and Infotainment

## RELIABILITY DATA

### 1. Operating Temperature Range

|                          |  |
|--------------------------|--|
| Specified Value          | -40~+125°C (Including self-generated heat) |
| Test Methods and Remarks | Including self-generated heat              |

### 2. Storage Temperature Range

|                          |   |
|--------------------------|---|
| Specified Value          | -40~+85°C                               |
| Test Methods and Remarks | -5 to 40°C for the product with taping. |

### 3. Rated current

|                 |                                |
|-----------------|--------------------------------|
| Specified Value | Within the specified tolerance |
|-----------------|--------------------------------|

### 4. Inductance

|                          |   |
|--------------------------|---|
| Specified Value          | Within the specified tolerance  |
| Test Methods and Remarks | Measuring equipment : LCR Meter (HP 4285A or equivalent)<br>Measuring frequency : 1MHz, 1V (4040F: 100kHz 1V) |

### 5. DC Resistance

|                          |  |
|--------------------------|--|
| Specified Value          | Within the specified tolerance                               |
| Test Methods and Remarks | Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent) |

### 6. High Temperature Exposure (Storage)

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours at 85 deg C<br>Unpowered   |

### 7. Temperature Cycling

|                          |  |
|--------------------------|--|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$                                      |
| Test Methods and Remarks | 1000 cycles (-40 deg C to +85 deg C)<br>30 min. maximum dwell time at each temperature extreme.<br>1 min. maximum transition time. |

### 8. Biased Humidity

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours, 85 deg C/85% RH.<br>Unpowered   |

### 9. Operational Life

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance: No significant abnormality in appearance.<br>Inductance change: Within $\pm 10\%$ |
| Test Methods and Remarks | 1000 hours, 85 deg C<br>Rated current   |

▶ This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

### 10. Resistance to Solvents

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.  |
| Test Methods and Remarks | ① Soak a test sample in isopropyl alcohol (IPA) at $25 \pm 5$ deg C for 3 to 3.5 minutes.<br>② Take the test sample out and brush 10 times using a brush soaked in IPA.<br>③ Repeat ① and ② twice more. |

### 11. Mechanical Shock

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$   |
| Test Methods and Remarks | Apply 3 shocks in each direction along 3 mutually perpendicular axes of the test specimen (18 shocks in total).<br>Peak value: 100g<br>Duration: 6ms<br>Test pulse: Half-sine<br>Velocity change: 3.7m/s. |

### 12. Vibration

|                          |  |
|--------------------------|--|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$        |
| Test Methods and Remarks | 5g's for 20 min., 12 cycles each of 3 orientations (36 cycles in total)<br>Test from: 10 Hz to 2000 Hz |

### 13. Resistance to Soldering Heat (Reflow)

|                          |  |
|--------------------------|--|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$  |
| Test Methods and Remarks | Reflow peak temperature: $260 \pm 5$ deg C<br>Duration time: $10 \pm 1$ sec.<br>Measure after inductors are kept at room temperature for $24 \pm 4$ hours. |


### 14. ESD

|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$ |
| Test Methods and Remarks | Per AEC-Q200-002  |

### 15. Solderability


|                          |   |
|--------------------------|---|
| Specified Value          | More than 90% of terminal electrode shall be covered with fresh solder. |
| Test Methods and Remarks | Per J-STD-002<br>a) Method B Solder at $235 \pm 5$ deg C for 5 sec.     |

### 16. Board Flex
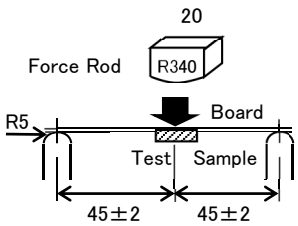
|                          |  |
|--------------------------|--|
| Specified Value          | Appearance : No significant abnormality in appearance.<br>Inductance change : Within $\pm 10\%$  |
| Test Methods and Remarks | Solder the test samples to the test boards by the reflow soldering.<br>Apply a force in a downward direction until amount of deflection reaches 2mm.<br>The 2-mm deflection shall be held for 60 sec.<br>Test board dimensions: 100mm × 40mm × 1.6mm.<br> |

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

**17. Terminal Strength (SMD)**
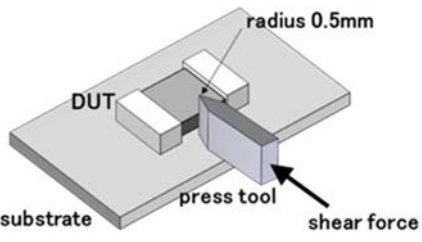
|                          |   |
|--------------------------|---|
| Specified Value          | Appearance : No significant abnormality in appearance.  |
| Test Methods and Remarks | <p>Apply a force of 17.7N for 60±5 sec.</p>  <p>The diagram shows a 3D perspective of the test setup. A rectangular substrate is shown in light gray. On top of it, a small component labeled 'DUT' is mounted. A 'press tool' is shown in white, with a rounded end labeled 'radius 0.5mm'. An arrow labeled 'shear force' points to the right, indicating the direction of the applied force on the terminal of the DUT.</p> |

**18. Standard condition**

|                 |   |
|-----------------|---|
| Specified Value | <p>Standard test condition :<br/>         Unless otherwise specified, temperature is 20±15°C and 65±20% of relative humidity.<br/>         When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of 20±2°C of temperature, 65±5% relative humidity.<br/>         Inductance is in accordance with our measured value.</p> |
|-----------------|---|

► This catalog contains the typical specification only due to the limitation of space. When you consider the purchase of our products, please check our specification. For details of each product (characteristics graph, reliability information, precautions for use, and so on), see our Web site (<http://www.ty-top.com/>).

# Wire-wound Metal Power Inductors MCOIL™ LSDN/LCDN/LBDN/LLDN/LMDN series

## ■ PRECAUTIONS

### 1. Circuit Design

#### Precautions

- ◆ Verification of operating environment, electrical rating and performance
  1. A malfunction in medical equipment, spacecraft, nuclear reactors, etc. may cause serious harm to human life or have severe social ramifications. As such, any inductors to be used in such equipment may require higher safety and/or reliability considerations and should be clearly differentiated from components used in general purpose applications.
  2. When inductors are used in places where dew condensation develops and/or where corrosive gas such as hydrogen sulfide, sulfurous acid, or chlorine exists in the air, characteristic deterioration may occur. Please do not use inductors under such environmental conditions.
- ◆ Operating Current (Verification of Rated current)
  1. The operating current including inrush current for inductors must always be lower than their rated values.
  2. Do not apply current in excess of the rated value because the inductance may be reduced due to the magnetic saturation effect.
- ◆ Temperature rise
 

Temperature rise of power choke coil depends on the installation condition in end products.  
Make sure that temperature rise of power choke coils in actual end products is within the specified temperature range.

### 2. PCB Design

#### Precautions


- ◆ Land pattern design
  1. Please refer to a recommended land pattern.
  2. There is stress, which has been caused by distortion of a PCB, to the inductor.
  3. Please consider the arrangement of parts on a PCB.

#### Technical considerations


- ◆ Land pattern design
 

Surface Mounting

  1. Mounting and soldering conditions should be checked beforehand.
  2. Applicable soldering process to this products is reflow soldering only.
  3. Please use the recommended land pattern shown as below. Electrical characteristics and the mounting ability of the product are being considered in the recommended land pattern. If a PCB is designed with other dimensions, defective soldering and stress to a product may occur due to misalignment. The performance of the product may not be brought out. If an adopted land pattern is different from the recommended land pattern, stress to the product will increase. It may cause cracks or defective electrical characteristics of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility.
  4. As coefficients of thermal expansion between an inductor and a PCB differs, cracks may occur on a core when thermal stress is applied to them after mounting an inductor. (Please refer to the drawings below.) Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility.


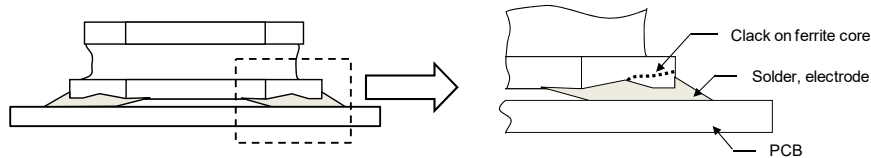


5. SMD inductors should be located to minimize any possible mechanical stresses from board warp or deflection. When splitting the PCB board after mounting inductors and other components, care is required so as not to give any stresses of deflection or twisting to the board.

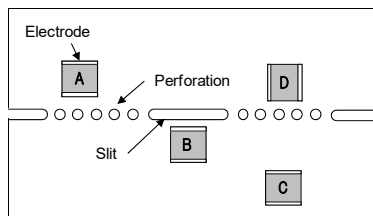


A product tends to undergo stress in order "A>C>B≡D".  
Please consider the layouts of a product to minimize any stresses.

### 3. Considerations for automatic placement
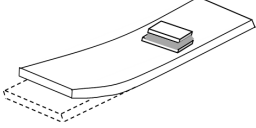
|                          |  |
|--------------------------|--|
| Precautions              | <p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> <li>1. Excessive impact load should not be imposed on the products when mounting onto the PC boards.</li> <li>2. Mounting and soldering conditions should be checked beforehand.</li> </ol>  |
| Technical considerations | <p>◆Adjustment of mounting machine</p> <ol style="list-style-type: none"> <li>1. When installing products, care should be taken not to apply distortion stress as it may deform the products.</li> <li>2. Stress may be applied to a product with a warp or a twist in handling of the product. Please conduct validation completely before studying adoption of this product and please judge the pros and cons of adoption of this product with taking on responsibility.</li> </ol> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <p>&lt;Wrap&gt;</p>  </div> <div style="text-align: center;"> <p>&lt;Twist&gt;</p>  </div> </div> |

### 4. Soldering
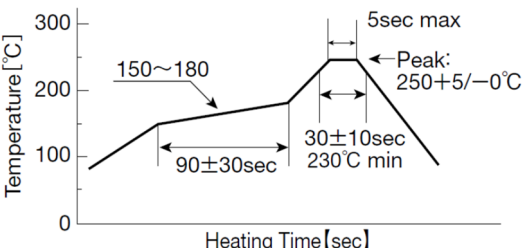
|                          |   |
|--------------------------|---|
| Precautions              | <p>◆Reflow soldering</p> <ol style="list-style-type: none"> <li>1. Please contact any of our offices for a reflow soldering, and refer to the recommended condition specified.</li> <li>2. The product shall be used reflow soldering only.</li> <li>3. Please do not add any stress to a product until it returns in normal temperature after reflow soldering.</li> </ol> <p>◆Lead free soldering</p> <ol style="list-style-type: none"> <li>1. When using products with lead free soldering, we request to use them after confirming adhesion, temperature of resistance to soldering heat, soldering etc sufficiently.</li> </ol> |
| Technical considerations | <p>◆Reflow soldering</p> <ol style="list-style-type: none"> <li>1. If products are used beyond the range of the recommended conditions, heat stresses may deform the products, and consequently degrade the reliability of the products.</li> </ol> <p>Recommended reflow condition (Pb free solder)</p>    |

### 5. Cleaning

|                          |   |
|--------------------------|---|
| Precautions              | <p>◆Cleaning conditions</p> <ol style="list-style-type: none"> <li>1. Washing by supersonic waves shall be avoided.</li> </ol>                |
| Technical considerations | <p>◆Cleaning conditions</p> <ol style="list-style-type: none"> <li>1. If washed by supersonic waves, the products might be broken.</li> </ol> |

## 6. Handling

|                          |   |
|--------------------------|---|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. Keep the product away from all magnets and magnetic objects.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. When splitting the PC board after mounting product, care should be taken not to give any stresses of deflection or twisting to the board.</li> <li>2. Board separation should not be done manually, but by using the appropriate devices.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. Please do not give the product any excessive mechanical shocks.</li> <li>2. Please do not add any shock and power to a product in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Please do not push to add any pressure to a winding part. Please do not give any shock and push into a ferrite core exposure part.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. Please avoid accumulation of a packing box as much as possible.</li> </ol> </li> <li>◆ Board mounting               <ol style="list-style-type: none"> <li>1. There shall be no pattern or via between terminals at the bottom of product.</li> <li>2. Components which are located in peripheral of product shall not make contact with surface (top, side) of product.</li> </ol> </li> </ul> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Handling               <ol style="list-style-type: none"> <li>1. There is a case that a characteristic varies with magnetic influence.</li> </ol> </li> <li>◆ Breakaway PC boards (splitting along perforations)               <ol style="list-style-type: none"> <li>1. The position of the product on PCBs shall be carefully considered to minimize the stress caused from splitting of the PCBs.</li> </ol> </li> <li>◆ Mechanical considerations               <ol style="list-style-type: none"> <li>1. There is a case to be damaged by a mechanical shock.</li> <li>2. There is a case to be broken by the handling in transportation.</li> </ol> </li> <li>◆ Pick-up pressure               <ol style="list-style-type: none"> <li>1. Damage and a characteristic can vary with an excessive shock or stress.</li> </ol> </li> <li>◆ Packing               <ol style="list-style-type: none"> <li>1. If packing boxes are accumulated, that could cause a deformation on packing tapes or a damage on the products.</li> </ol> </li> <li>◆ Board mounting               <ol style="list-style-type: none"> <li>1. If there is pattern or via between terminals at the bottom of product, it may cause characteristics change.</li> <li>2. If components which are located in peripheral of product make contact with surface (top, side) of product, it may cause damage or characteristics change.</li> </ol> </li> </ul>  |

## 7. Storage conditions

|                          |   |
|--------------------------|---|
| Precautions              | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. To maintain the solderability of terminal electrodes and to keep the packing material in good condition, temperature and humidity in the storage area should be controlled.                   <ul style="list-style-type: none"> <li>▪ Storage conditions                       <ul style="list-style-type: none"> <li>Ambient temperature : <math>-5\sim 40^{\circ}\text{C}</math></li> <li>Humidity : Below 70% RH</li> </ul> </li> <li>▪ The recommended ambient temperature is below <math>30^{\circ}\text{C}</math>. Even under ideal storage conditions, solderability of products electrodes may decrease as time passes.</li> </ul> </li> </ol> </li> </ul> <p style="margin-left: 40px;">For this reason, product should be used within 6 months from the time of delivery.<br/>In case of storage over 6 months, solderability shall be checked before actual usage.</p> |
| Technical considerations | <ul style="list-style-type: none"> <li>◆ Storage               <ol style="list-style-type: none"> <li>1. Under a high temperature and humidity environment, problems such as reduced solderability caused by oxidation of terminal electrodes and deterioration of taping/packaging materials may take place.</li> </ol> </li> </ul>  |