

Wire-wound Ferrite Power Inductors LCXH series

■ RELIABILITY DATA

1. Operating Temperature Range

Specified Value	−40~+125°C (Including self-generated heat)
-----------------	--

Test Methods and Remarks	Including self-generated heat
--------------------------	-------------------------------

2. Storage Temperature Range

Specified Value	−40~+125°C
-----------------	------------

Test Methods and Remarks	−5 to 40°C for the product with taping.
--------------------------	---

3. Rated current

Specified Value	Within the specified tolerance
-----------------	--------------------------------

4. Inductance

Specified Value	Within the specified tolerance
-----------------	--------------------------------

Test Methods and Remarks	Measuring equipment : LCR Meter (HP 4285A or equivalent) Measuring frequency : 100kHz, 1V
--------------------------	--

5. DC Resistance

Specified Value	Within the specified tolerance
-----------------	--------------------------------

Test Methods and Remarks	Measuring equipment : DC ohmmeter (HIOKI 3227 or equivalent)
--------------------------	--

6. High Temperature Exposure (Storage)

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 hours at 125 deg C Unpowered
--------------------------	--------------------------------------

7. Temperature Cycling

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 cycles (−40 deg C to +105 deg C) 30 min. maximum dwell time at each temperature extreme. 1 min. maximum transition time.
--------------------------	---

8. Biased Humidity

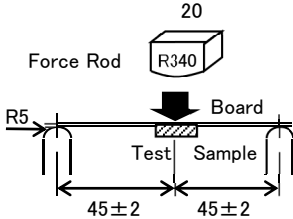
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

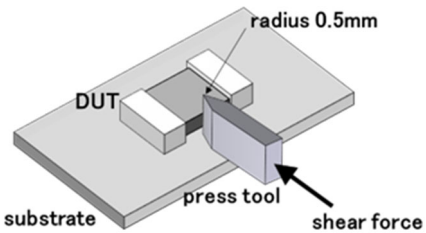
Test Methods and Remarks	1000 hours, 85 deg C/85% RH. Unpowered
--------------------------	---

9. Operational Life

Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
-----------------	---

Test Methods and Remarks	1000 hours, 105 deg C Rated current
--------------------------	--

10. Resistance to Solvents	
Specified Value	Appearance: No significant abnormality in appearance.
Test Methods and Remarks	① Soak a test sample in isopropyl alcohol (IPA) at 25 ± 5 deg C for 3 to 3.5 minutes. ② Take the test sample out and brush 10 times using a brush soaked in IPA. ③ Repeat ① and ② twice more.
11. Mechanical Shock	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Apply 3 shocks in each direction along 3 mutually perpendicular axes of the test specimen (18 shocks in total). Peak value: 100g Duration: 6ms Test pulse: Half-sine Velocity change: 3.7m/s.
12. Vibration	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	5g's for 20 min., 12 cycles each of 3 orientations (36 cycles in total) Test from: 10 Hz to 2000 Hz
13. Resistance to Soldering Heat (Reflow)	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	The test sample shall be exposed to reflow oven at 183°C for 90–120 seconds, with peak temperature at $250 \pm 5^{\circ}\text{C}$ for 30 ± 5 seconds, 3 times. Measure after inductors are kept at room temperature for 24 ± 4 hours.
14. ESD	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Per AEC-Q200-002
15. Solderability	
Specified Value	More than 90% of terminal electrode shall be covered with fresh solder.
Test Methods and Remarks	Per J-STD-002 a) Method B Solder at 235 ± 5 deg C for 5 sec. c) Method D Solder at 260 ± 5 deg C for 30 sec.
16. Board Flex	
Specified Value	Appearance: No significant abnormality in appearance. Inductance change: Within $\pm 10\%$
Test Methods and Remarks	Solder the test samples to the test boards by the reflow soldering. Apply a force in a downward direction until amount of deflection reaches 2mm. The 2-mm deflection shall be held for 60 sec. Test board dimensions: $100\text{mm} \times 40\text{mm} \times 1.6\text{mm}$. 

17. Terminal Strength (SMD)	
Specified Value	Appearance : No significant abnormality in appearance.
Test Methods and Remarks	<p>Apply a force of 17.7N for 60 ± 5 sec.</p> 
18. Standard condition	
Specified Value	<p>Standard test condition : Unless otherwise specified, temperature is $20 \pm 15^{\circ}\text{C}$ and $65 \pm 20\%$ of relative humidity. When there is any question concerning measurement result: In order to provide correlation data, the test shall be condition of $20 \pm 2^{\circ}\text{C}$ of temperature, $65 \pm 5\%$ relative humidity. Inductance is in accordance with our measured value.</p>